


5-Port 100BASE-TX Industrial Switch

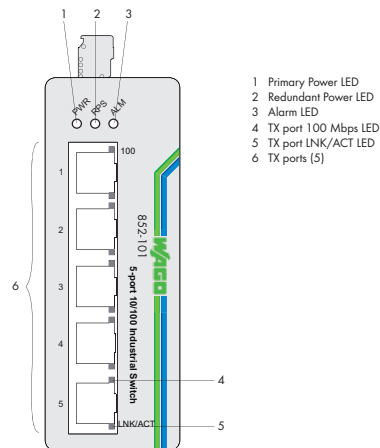

The 852-101 Industrial Switch is a 5-port 10/100Base-TX ETHERNET switch. The switch has a rugged housing, a redundant power supply and function monitoring with relay, making it ideal for a wide range of applications.

Features:

- Redundant DC power supply
- Wide supply voltage range: 9 V ... 48 V
- DIP switch enables alarm functions
- Full compliance with IEEE802.3, 802.3u standards
- Non-blocking, store-and-forward switching
- Auto-negotiation on all 10/100Base-TX ports
- Auto-MDI/MDIX (crossover) on all 10/100Base-TX ports

Description	Item No.	Pack. Unit
5-Port 100BASE-TX Industrial Switch	852-101	1
Approvals		
Conformity marking	CE	
UL 508		

Technical Data	
Ports	5 x 10/100Base-TX (RJ-45)
Standards	IEEE 802.3u 100Base-TX; IEEE 802.3 10Base-T
Maximum length	10/100Base-TX: 100 m
Supply voltage	9 V ... 48 V DC (line length < 3 m)
Energy consumption max.	3.84 W
Energy consumption typ. (24 V)	3.36 W
Operating temperature	0 °C ... +60 °C
Storage temperature	-20 °C ... +80 °C
Relative air humidity (no condensation)	95 %
Dimensions (mm) W x H x L	50 x 120 x 105
	Height from upper-edge of DIN 35 rail
Weight	639 g
Vibration resistance	acc. to IEC 60068-2-6
Shock resistance	acc. to IEC 60068-2-27
Degree of protection	IP30
EMC CE-Immunity to interference	acc. to EN 61000-6-2 (2005)
EMC CE-Emission of interference	acc. to EN 61000-6-4 (2007)