




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS		DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398	
DCP #	REV	DESCRIPTION	
1453	A	Released	
DRAWN	DATE	CHECKD	DATE
JWM	1/9/04	HO	1/13/04
APPRVD	DATE		
JC	1/23/04		

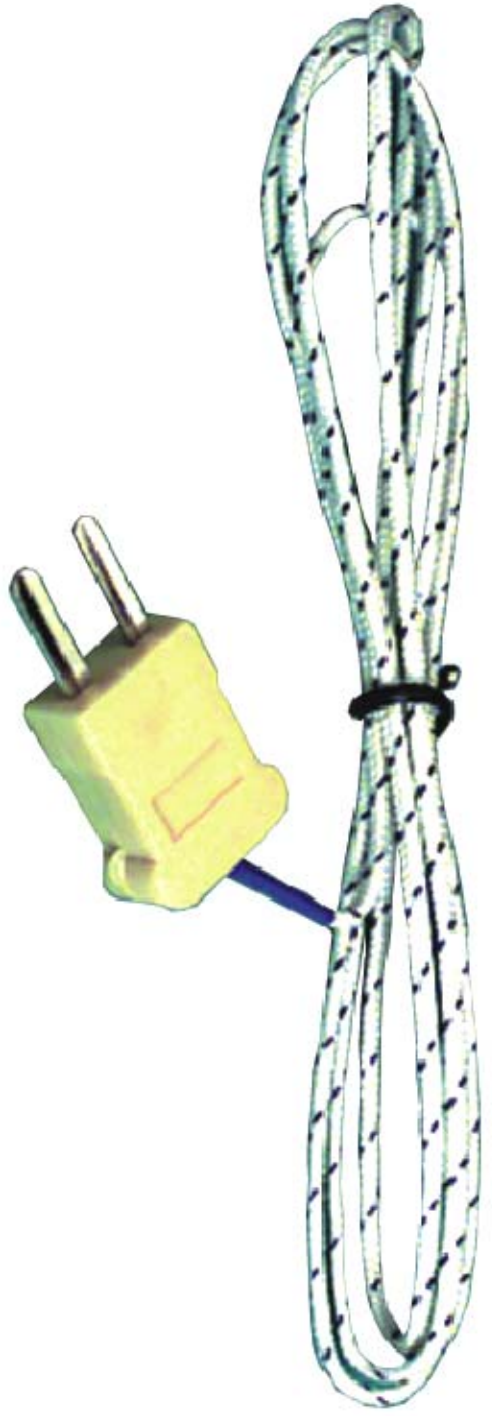

- NOTES:**
- General purpose bead probe
  - 3 foot PVC insulated cable
  - Temperature range -50°C to 200°C [-58°F ~ 392°F]
  - Can be used with all standard K-Type thermometers and multimeters with temperature function

**DISCLAIMER:**  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TOLERANCES:**  
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

<b>DRAWN BY:</b>	Jeff McVicker	<b>DATE:</b>	1/9/04
<b>CHECKED BY:</b>	Hisham Odish	<b>DATE:</b>	1/13/04
<b>APPROVED BY:</b>	John Cole	<b>DATE:</b>	1/23/04

<b>DRAWING TITLE:</b>			
<b>K-Type Bead Probe</b>			
<b>SIZE</b>	<b>DWG. NO.</b>	<b>ELECTRONIC FILE</b>	
A	72-2061	84N2123.dwg	
<b>SCALE:</b>	NTS	<b>U.O.M.:</b>	INCHES [mm]
		<b>SHEET:</b>	1 OF 1
<b>REV</b>			
A			