
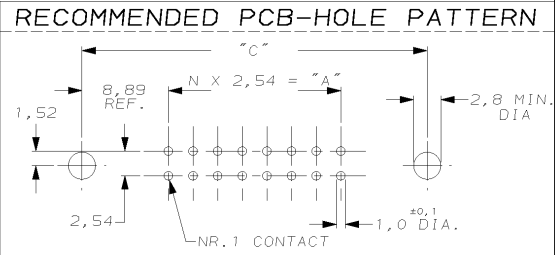


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE PROJECTION

- NOTES**
- △ SNAP-IN POLARIZERS PN. 927636-2 OR 927637-2 CAN BE APPLIED.
 - △ THERE IS NO WINDOW FOR SNAP-IN POLARIZERS AT THIS END IN 10 AND 14 POS. HEADERS.
 - △ INDICATION OF FIRST POSITION.
 - △ SPECIAL-HEAD MOUNTING-SCREW PN. 826712-2 CAN BE APPLIED.
 - △ SNAP-IN CONNECTOR "LATCH / EJECTOR" PN. 927176-2 OR 927215-2 CAN BE APPLIED.
 - △ THERE IS NO CENTER STAND-OFF IN 10-26 POS. HEADERS.
 - △ DIMENSION WITH EJECTOR: PN. 927176-2 H= 23 MM, PN.927215-2 H= 27,3 MM.
H1= 20,2 MM H1= 24 MM
H2= 6 MM H2= 7 MM
 - △ HOLE OVER THE ENTIRE WIDTH OF CODING HOLDER PERMITTED



② PIN-CONTACT	BRASS	HATING SIDE: 0,8µm AU OR 0,8µm AuP DURAGOLD® / OVER 1,27µm Ni SOLDER SIDE: MIN. 3,0µm Sn OVER 1,27µm Ni
① HOUSING	GLASSFILLED POLYESTER	GREY

DIM. "E"	DIM. "D"	DIM. "C"	DIM. "B"	DIM. "A"	NR. OF POSITIONS	PARTNUMBER
100,6	90,4	96,5	86,4	78,7	64	6-828582-4
95,5	85,3	91,4	81,3	73,7	60	6-828582-0
82,8	72,6	78,7	68,6	61,0	50	5-828582-0
70,1	59,9	66,0	55,9	48,3	40	4-828582-0
62,5	52,3	58,4	48,3	40,6	34	3-828582-4
52,3	42,2	48,3	38,1	30,5	26	2-828582-6
44,7	34,5	40,6	30,5	22,9	20	2-828582-0
39,6	29,5	35,6	25,4	17,8	15	1-828582-6
37,1	26,9	33,0	22,9	15,2	14	1-828582-4
32,0	21,8	27,9	17,8	10,2	10	1-828582-0

CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED

© COPYRIGHT 19- BY AMP HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.

AMP AMP HOLLAND B.V.
's-Hertogenbosch, The Netherlands.

AMP-LATCH HEADER 180 DEG. VERSION

DR. : J.V. LIEMPT	CHK. : R. VERSTIJNEN	APP. : L.V. SREEST.
DATE: 29-11-93	DATE: -	DATE: -

DWG. No. C-828582	LOC. AI A3	SHEET 1 OF 1	REV. LTR. A2
-------------------	------------	--------------	--------------