






HDSL2/G.SHDSL TRANSFORMER

For Level One Chipsets

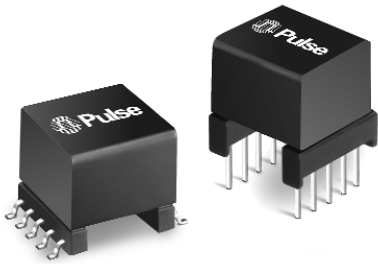

-  Matched to Level One's SK70743, LXT772 and LXT776 chipsets
-  Excellent THD performance
-  Maximum height .485" (12,32 mm)
-  Designed to meet UL 1950 supplementary insulation requirements for working voltages up to 250 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Mounting	Turns Ratio Chip - Line (±2%)	Inductance - Line Side @10 kHz, 100 mV	Leakage Inductance - Line Side @ 100 kHz, 0.02 Vrms	DC Resistance	
					Line Side	Chip Side
B1056 ¹	SMT	1CT:3CS	2.0 mH ±10% ² (1-5) with (2-4) shorted	20 µH MAX (1-5) with (2-4) and (6,7,8,9) shorted	≤ 2.05 Ω MAX (1-4) = (2-5)	≤ 0.50 Ω MAX (1-4) = (2-5)
B1083	THT	1:3CS	2.25 mH ±10% (2-5) with (4-1) shorted	8 µH MAX (2-5) with (4-1) and (10-6) shorted	≤ 3.30 Ω MAX (2-4) = (1-5)	≤ 0.75 Ω MAX (10-6)

Additional Electrical Specifications

Part Number	Longitudinal Balance	THD	Interwinding Capacitance (@ 100 kHz, 0.1 Vrms)	Return Loss	Isolation Voltage
B1056 ¹	≤ -45 dB (20 KHz to 400 KHz)	≤ -70 dB (@ 10 kHz, 5.0 Vrms)	≤ 60 pF	≥ 16 dB (from 40 kHz to 300 kHz)	1500 Vrms
B1083	≤ -53 dB (10 KHz to 400 KHz)	≤ -71 dB (@ 15 kHz, 3.8 Vrms)	Not Specified	≥ 12 dB (from 50 kHz to 2 MHz)	1500 Vrms


¹ Transformers are shipped in trays unless Tape & Reel packaging is specified by adding the suffix "T" to the part number (i.e. B1056T).

² DC bias current: 0 to 100 mA.


Mechanicals

Schematics

B1083


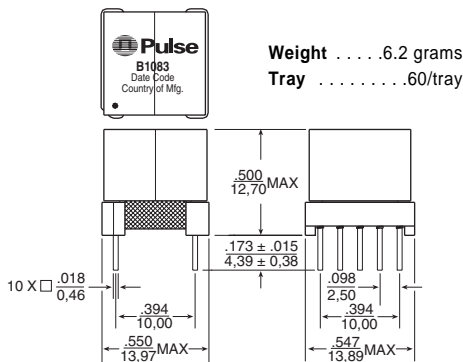


B1056

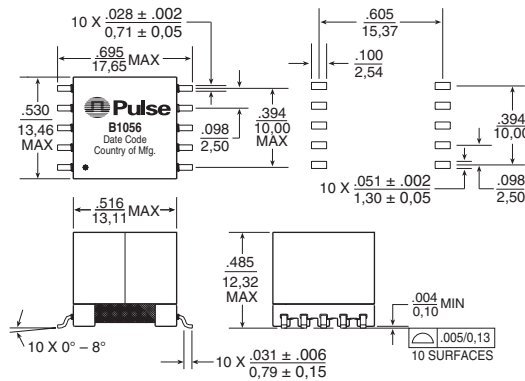

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

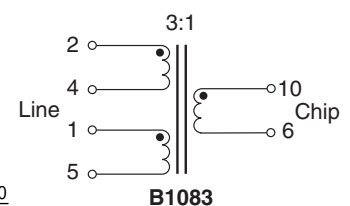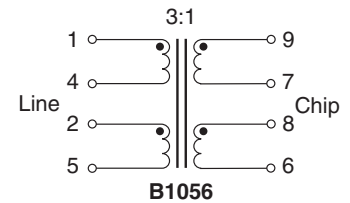

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)


3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

 Printed on recycled paper. ©2003, Pulse Engineering, Inc.

B965.A (12/03)