

(1,27mm) .050"
PCMT, PCMS SERIES

PCMCIA TERMINAL & SOCKET STRIPS


SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?PCMT

- Insulator Material:** Black Liquid Crystal Polymer
- Terminal Material:** Phosphor Bronze
- Plating:** Sn or Au over 50µ" (1,27µm) Ni
- Current Rating:** 2A @ 80°C ambient
- Operating Temp Range:** -55°C to +105°C with Tin; -55°C to +125°C with Gold
- Lead-Free Solderable:** Yes
- SMT Lead Coplanarity:** (0,15mm) .006" max
- RoHS Compliant:** Yes



APPLICATION



Note: Some lengths, styles and options are non-standard, non-returnable.


PCMT - 134 - LEAD STYLE - PLATING OPTION - D - RA - CARD LENGTH - SL

Mates with: PCMS

Specify LEAD STYLE from chart

- L** = 10µ" (0,25µm) Gold on post, Matte Tin on tail
- S** = 30µ" (0,76µm) Gold on post, Matte Tin on tail

- 01** = (25,40mm) 1.00" Card Length
- 02** = (50,80mm) 2.00" Card Length
- 03** = (76,20mm) 3.00" Card Length

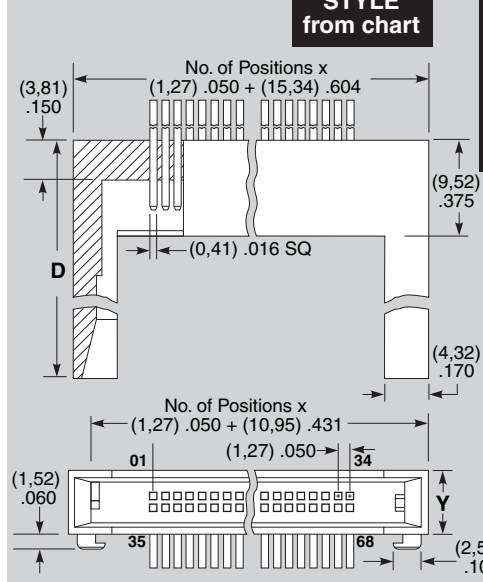

CARD LENGTH	D
-01	(25,40) 1.00
-02	(50,80) 2.00
-03	(76,20) 3.00

LEAD STYLE	Y
-01	(6,35) .250
-02	(8,89) .350

POSITION NUMBER	C (POST)
01, 17, 34, 35, 51, 68	(5,00) .197
36, 67	(3,50) .138
ALL OTHERS	(4,25) .167

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?PCMS

- Insulator Material:** Black Liquid Crystal Polymer
- Contact Material:** BeCu
- Plating:** Au or Sn over 50µ" (1,27µm) Ni
- Current Rating:** 1A
- Operating Temp Range:** -55°C to +125°C
- Contact Resistance:** 10 mΩ max
- Insertion Depth:** (3,05mm) .120" min
- Insertion Force:** (Single contact only) 4.0oz (1,11N) avg.
- Withdrawal Force:** (Single contact only) 3.0oz (0,83N) avg. 3.0oz (0,83N) avg.
- Lead-Free Solderable:** Yes
- SMT Lead Coplanarity:** (0,10mm) .004" max
- RoHS Compliant:** Yes




PCMS - 134 - CARD THICKNESS - PLATING OPTION - D

Mates with: PCMT

- 01** = (0,80mm) .031" thick board
- 02** = (1,60mm) .062" thick board

- L** = 10µ" (0,25µm) Gold on contact, Matte Tin on tail
- S** = 30µ" (0,76µm) Gold on contact, Matte Tin on tail

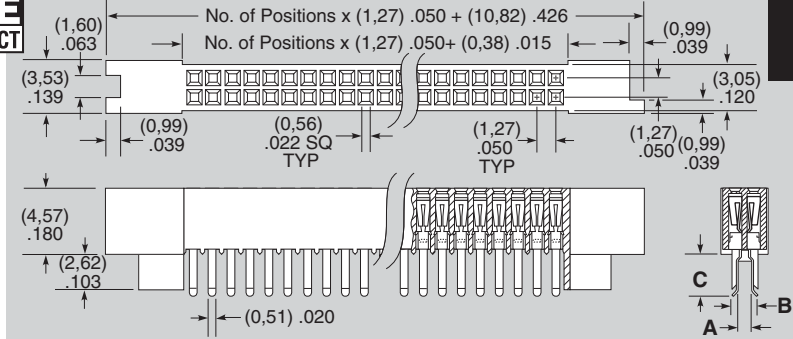

CARD THICKNESS	A	B	C
-01	(1,02) .040	(1,79) .070	(3,12) .123
-02	(1,70) .067	(2,46) .097	(2,77) .109

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM