





SL Series Multimedia Modules

3.2

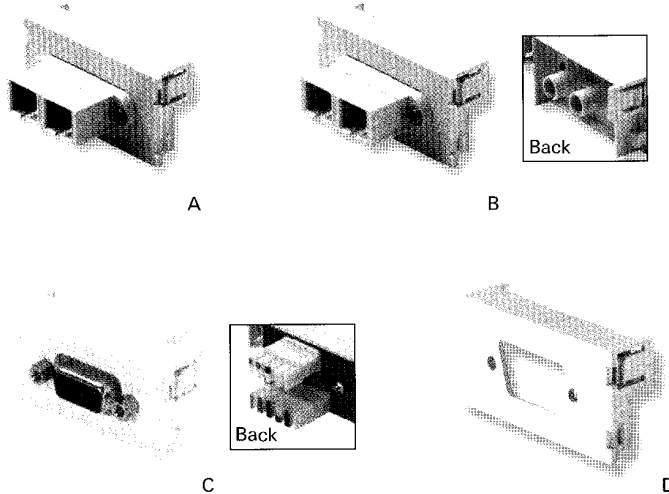

WIRING DIAGRAM

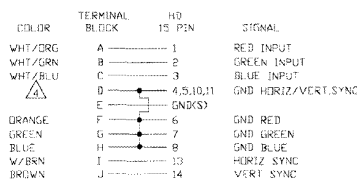

Product Facts

- :: Fit SL Series Faceplates
- :: Front loading
- :: Optical Fiber Coupler Modules are suitable for use with single-mode or multimode connectors as listed
- :: SVGA Multimedia Modules:
 - ... Available loaded with a SVGA 110 Termination Module or unloaded for use with a SVGA coupler (sold separately)
- :: SVGA 110 Termination Module
 - ... Works with VGA and SVGA signals
 - ... Features 110-Style termination for easy installation
 - ... Is suitable for use with standard Category 5e or 6 UTP or FTP (recommended) cables
 - ... Can be used where distances between monitor and computer do not exceed:
 - 15 ft with Cat 5e UTP cable
 - 20 ft with Cat 6 UTP cable
 - 35 ft with Cat 5e or 6 FTP cables
 - ... Requires a 9th conductor and is recommended for use with FTP cables (utilizes drain wire for 9th conductor)

Description		Units	Figure	Part Number
2-Fiber Coupler	Duplex SC	Single-mode	-	1375306-X
		Multimode	A	1375123-X
	Duplex SC to ST	Multimode	B	1375241-X
SVGA	Loaded	1	C	1479288-X
	Unloaded	1	D	1479079-X

X denotes color: -1 = Almond, -2 = Black, -3 = White, -4 = Gray, 1--1 = Electrical Ivory