

File E61760(N)

59135 High Temperature Flange Mount Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- High temperature rated
- Cross-slotted mounting holes for optimum adjustability
- Standard, high voltage or change over contacts
- Customer defined sensitivity
- Choice of cable length and connector


Benefits

- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination
- Simple installation and adjustment

Applications

- Position and limit sensing
- Security system switch
- Linear actuators
- Door switch

DIMENSIONS (in) mm

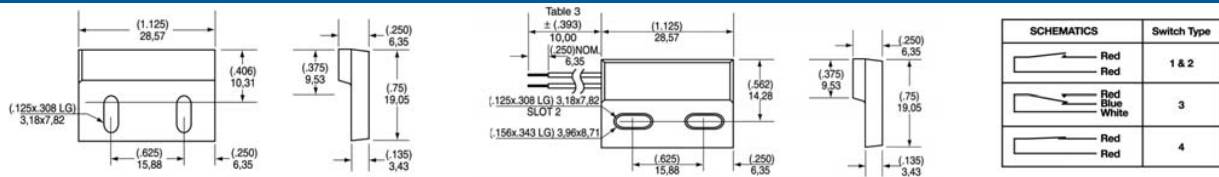

CUSTOMER OPTIONS - Switching Specifications

TABLE 1			Normally Open	Normally Open High Voltage	Change Over	Normally Closed
Contact Type						
Switch Type			1	2	3	4
Voltage	Power	Watt - max.	10	10	5	5
	Switching	Vdc - max.	200	300	175	175
Current	Breakdown	Vdc - min.	250	450	200	200
	Switching	A - max.	0.5	0.5	0.25	0.25
Resistance	Carry	A - max.	1.2	1.5	1.5	1.5
	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
Capacitance	Insulation	Ω - min.	10 ¹⁰	10 ¹⁰	10 ⁹	10 ⁹
	Contact	pF - typ.	0.3	0.2	0.3	0.3
Temperature	Operating	°C	-40 to +150	-20 to +150	-40 to +150	-40 to +150
	Storage	°C	-65 to +150	-65 to +150	-65 to +150	-65 to +150
Time	Operate	ms - max.	1.0	1.0	3.0	3.0
	Release	ms - max.	1.0	1.0	3.0	3.0
Shock	11ms 1/2 sine	G - max.	100	100	50	50
Vibration	50-2000 Hz	G - max.	30	30	30	30

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2		TABLE 3		TABLE 4																																															
Sensitivity Options:- Activate Distances are approximate using Hamlin 57135 actuator as illustrated Switch AT before modification		Cable Type:- 20 AWG 19/32 FEP ULI130/UL1332		Termination Options:-																																															
		Standard Lengths		(2 WIRE VERSIONS ILLUSTRATED)																																															
<table border="1"> <thead> <tr> <th>Select Option</th> <th>S</th> <th>T</th> <th>U</th> <th>V</th> </tr> </thead> <tbody> <tr> <td>1 Normally Open</td> <td>12-18</td> <td>17-23</td> <td>22-28</td> <td>27-33</td> </tr> <tr> <td>2 High Voltage</td> <td>12-18</td> <td>17-23</td> <td>22-28</td> <td>27-33</td> </tr> <tr> <td>3 Change Over</td> <td>15-20</td> <td>20-25</td> <td>25-30</td> <td>30-35</td> </tr> <tr> <td>4 Normally Closed</td> <td>15-20</td> <td>20-25</td> <td>25-30</td> <td>30-35</td> </tr> </tbody> </table>	Select Option	S	T	U	V	1 Normally Open	12-18	17-23	22-28	27-33	2 High Voltage	12-18	17-23	22-28	27-33	3 Change Over	15-20	20-25	25-30	30-35	4 Normally Closed	15-20	20-25	25-30	30-35	<table border="1"> <thead> <tr> <th>SELECT OPTION</th> <th>CABLE LENGTH (in) mm</th> </tr> </thead> <tbody> <tr> <td>01</td> <td>(3,94) 100</td> </tr> <tr> <td>02</td> <td>(11,81) 300</td> </tr> <tr> <td>03</td> <td>(19,69) 500</td> </tr> <tr> <td>04</td> <td>(29,53) 750</td> </tr> <tr> <td>05</td> <td>(39,37) 1000</td> </tr> </tbody> </table>		SELECT OPTION	CABLE LENGTH (in) mm	01	(3,94) 100	02	(11,81) 300	03	(19,69) 500	04	(29,53) 750	05	(39,37) 1000	<table border="1"> <thead> <tr> <th>SELECT OPTION</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>A or F</td> <td>Tinned or untinned leads</td> </tr> <tr> <td>C</td> <td>6.35mm fastons</td> </tr> <tr> <td>D</td> <td>AMP MTE 2.54mm pitch</td> </tr> <tr> <td>E</td> <td>JST XHP 2.5mm pitch</td> </tr> </tbody> </table>		SELECT OPTION	DESCRIPTION	A or F	Tinned or untinned leads	C	6.35mm fastons	D	AMP MTE 2.54mm pitch	E	JST XHP 2.5mm pitch
Select Option	S	T	U	V																																															
1 Normally Open	12-18	17-23	22-28	27-33																																															
2 High Voltage	12-18	17-23	22-28	27-33																																															
3 Change Over	15-20	20-25	25-30	30-35																																															
4 Normally Closed	15-20	20-25	25-30	30-35																																															
SELECT OPTION	CABLE LENGTH (in) mm																																																		
01	(3,94) 100																																																		
02	(11,81) 300																																																		
03	(19,69) 500																																																		
04	(29,53) 750																																																		
05	(39,37) 1000																																																		
SELECT OPTION	DESCRIPTION																																																		
A or F	Tinned or untinned leads																																																		
C	6.35mm fastons																																																		
D	AMP MTE 2.54mm pitch																																																		
E	JST XHP 2.5mm pitch																																																		

ORDERING INFORMATION

N.B. 57135 actuator sold separately

59135 - X - X - XX - X

- Series 59135
- Switch Type — Table 1
- Sensitivity — Table 2
- Cable Length — Table 3
- Termination — Table 4

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
 Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
 Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com
 Hametrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

ISSUE No: 4 DATE: 1/5/3

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.