



Surface Mount Power Voltage-Regulating Diodes

eSMP® Series



DO-220AA (SMP)

PRIMARY CHARACTERISTICS

V_{WM}	3.9 V to 36 V
P_D at $T_L = 75\text{ °C}$	1500 mW
P_D at $T_L = 25\text{ °C}$	600 mW
T_J max.	150 °C

TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

FEATURES

- Very low profile - typical height of 1.0 mm
- Ideal for automated placement
- Low Zener impedance
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Not recommended for PCB bottom side wave mounting
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- **Halogen-free according to IEC 61249-2-21 definition**



RoHS
COMPLIANT
HALOGEN
FREE

MECHANICAL DATA

Case: DO-220AA (SMP)

Molding compound meets UL 94 V-0 flammability rating
Base P/N-M3 - halogen-free, RoHS compliant, and commercial grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

M3 suffix meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25\text{ °C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation at $T_L = 75\text{ °C}$ (fig. 1) ⁽¹⁾	P_D	1500	mW
Power dissipation at $T_A = 25\text{ °C}$ (fig. 1) ⁽²⁾	P_D	600	mW
Maximum instantaneous forward voltage at 200 mA for all types ⁽³⁾	V_F	1.5	V
Operating junction temperature	T_J	150	°C
Storage temperature range	T_{STG}	- 65 to + 150	°C

Notes

⁽¹⁾ Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal

⁽²⁾ Mounted on minimum recommended pad layout

⁽³⁾ Pulse test: 300 μ s pulse width, 1 % duty cycle

PTV3.9B thru PTV36B

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)								
PART NUMBER	DEVICE MARKING CODE	ZENER VOLTAGE			MAXIMUM ZENER DYNAMIC IMPEDANCE		MAXIMUM REVERSE LEAKAGE CURRENT	
		V _Z (V)		I _{ZT} (mA)	I _{ZT} (Ω)	Z _{ZT} (mA)	I _R	V _R
		MIN.	MAX.					
PTV 3.9B	VB	3.9	4.4	40	15	40	20	1.0
PTV 4.3B	VC	4.3	4.8	40	15	40	20	1.0
PTV 4.7B	VD	4.7	5.2	40	10	40	20	1.0
PTV 5.1B	VE	5.1	5.7	40	8	40	20	1.0
PTV 5.6B	VF	5.6	6.3	40	8	40	20	1.5
PTV 6.2B	VG	6.2	7.0	40	6	40	20	3.0
PTV 6.8B	VH	6.8	7.7	40	6	40	50	3.5
PTV 7.5B	VI	7.5	8.4	40	4	40	20	4.0
PTV 8.2B	VJ	8.2	9.3	40	4	40	20	5.0
PTV 9.1B	VK	9.1	10.2	40	6	40	20	6.0
PTV 10B	VL	10.0	11.2	40	6	40	10	7.0
PTV 11B	VM	11.0	12.3	20	8	20	10	8.0
PTV 12B	VN	12.0	13.5	20	8	20	10	9.0
PTV 13B	VO	13.3	15.0	20	10	20	10	10.0
PTV 15B	VP	14.7	16.5	20	10	20	10	11.0
PTV 16B	VQ	16.2	18.3	20	12	20	10	12.0
PTV 18B	VR	18.0	20.3	20	12	20	10	13.0
PTV 20B	VS	20.0	22.4	20	14	20	10	15.0
PTV 22B	VT	22.0	24.5	10	14	10	10	17.0
PTV 24B	VU	24.0	27.6	10	16	10	10	19.0
PTV 27B	VV	27.0	30.8	10	16	10	10	21.0
PTV 30B	VX	30.0	34.0	10	18	10	10	23.0
PTV 33B	VY	33.0	37.0	10	18	10	10	25.0
PTV 36B	VZ	36.0	40.0	10	20	10	10	27.0

THERMAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Typical thermal resistance, junction to lead ⁽¹⁾	R _{θJL}	50	°C/W
Typical thermal resistance, junction to ambient ⁽²⁾	R _{θJA}	208	°C/W

Notes

⁽¹⁾ Mounted on PCB with 5.0 mm x 5.0 mm copper pad areas attached to each terminal

⁽²⁾ Mounted on minimum recommended pad layout

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
PTV7.5B-M3/84A	0.024	84A	3000	7" diameter plastic tape and reel
PTV7.5B-M3/85A	0.024	85A	10 000	13" diameter plastic tape and reel

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

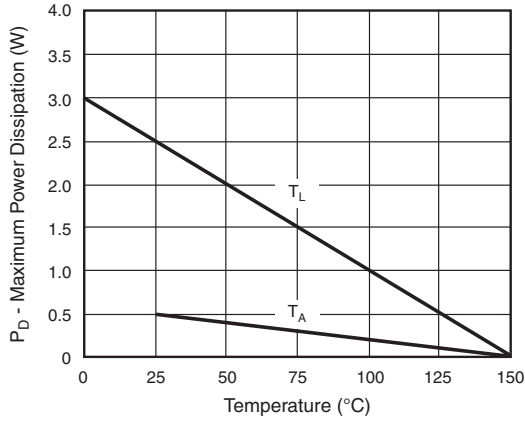


Fig. 1 - Steady State Power During

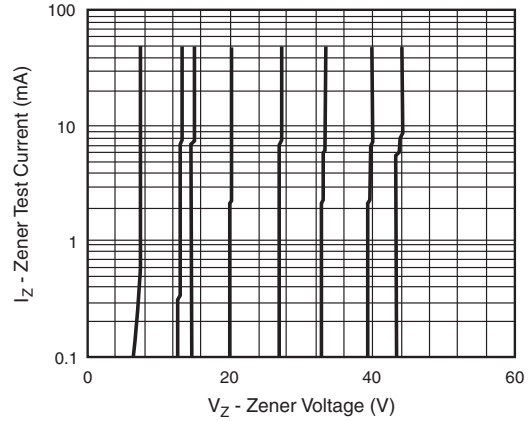


Fig. 3 - Typical Zener Voltage


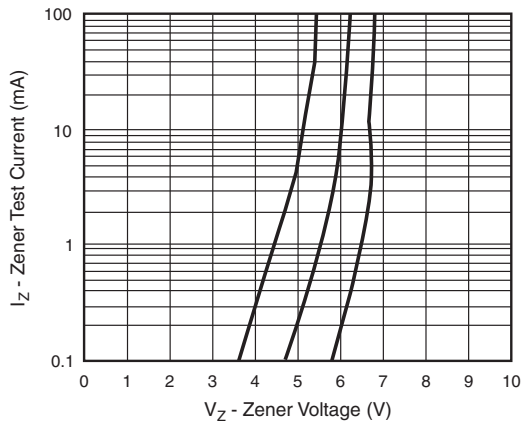


Fig. 2 - Typical Zener Voltage

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)
DO-220AA (SMP)



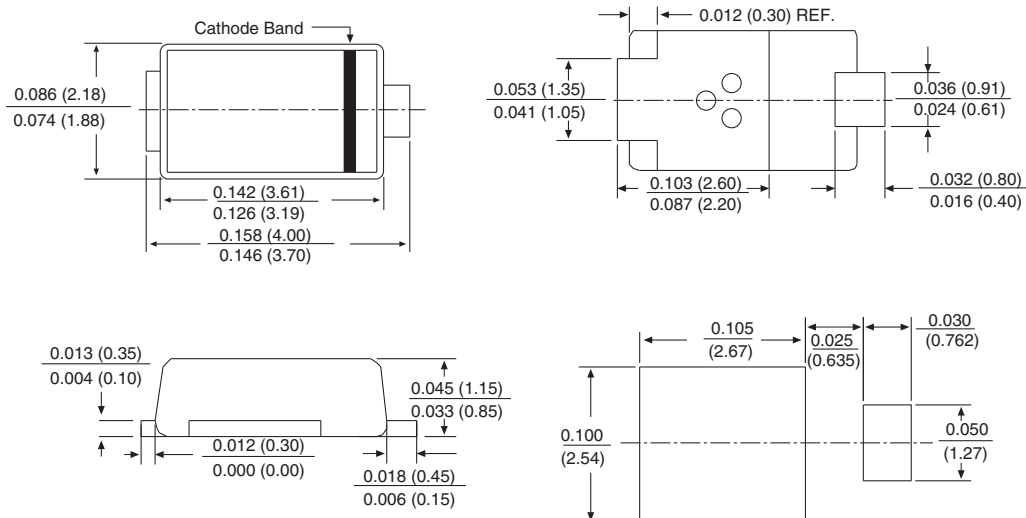

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.