
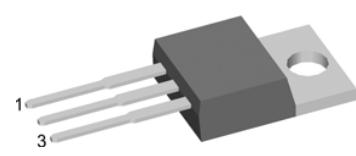


Sonic-FRD

High Performance Fast Recovery Diode
Low Loss and Soft Recovery
Common Cathode

Part number

DHG 10 C 600PB



Backside: cathode

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commuting switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package:

- TO-220AB
- Industry standard outline
- Epoxy meets UL 94V-0
- RoHS compliant

Ratings


Symbol	Definition	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{vj} = 25^\circ\text{C}$			600	V
I_R	reverse current	$V_R = 600\text{ V}$ $V_R = 600\text{ V}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 125^\circ\text{C}$		10 1	μA mA
V_F	forward voltage	$I_F = 5\text{ A}$ $I_F = 10\text{ A}$ $I_F = 5\text{ A}$ $I_F = 10\text{ A}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 125^\circ\text{C}$		2.20 2.98 2.02 2.85	V
I_{FAV}	average forward current	rectangular, $d = 0.5$	$T_c = 110^\circ\text{C}$		5	A
V_{FO}	threshold voltage	$\left. \begin{array}{l} \text{slope resistance} \\ \text{for power loss calculation only} \end{array} \right\}$	$T_{vj} = 150^\circ\text{C}$		1.31	V
r_F	slope resistance				133	$\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				3.15	K/W
T_{vj}	virtual junction temperature		-55		150	$^\circ\text{C}$
P_{tot}	total power dissipation		$T_c = 25^\circ\text{C}$		40	W
I_{FSM}	max. forward surge current	$t_p = 10\text{ ms (50 Hz), sine}$	$T_{vj} = 45^\circ\text{C}$		40	A
I_{RM}	max. reverse recovery current	$I_F = 5\text{ A};$ $-\frac{dI_F}{dt} = 100\text{ A}/\mu\text{s}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 125^\circ\text{C}$	2		A
t_{rr}	reverse recovery time	$V_R = 400\text{ V}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 125^\circ\text{C}$	35		ns ns
C_J	junction capacitance	$V_R = 300\text{ V}; f = 1\text{ MHz}$	$T_{vj} = 25^\circ\text{C}$	tbd		pF
E_{AS}	non-repetitive avalanche energy	$I_{AS} = \text{tbd A}; L = 100\text{ }\mu\text{H}$	$T_{vj} = 25^\circ\text{C}$		tbd	mJ
I_{AR}	repetitive avalanche current	$V_A = 1.5 \cdot V_R \text{ typ.; } f = 10\text{ kHz}$			tbd	A

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
I_{RMS}	RMS current	per pin*			35	A
R_{thCH}	thermal resistance case to heatsink			0.50		K/W
M_D	mounting torque		0.4		0.6	Nm
F_c	mounting force with clip		20		60	N
T_{stg}	storage temperature		-55		150	°C
Weight				2		g

* I_{RMS} is typically limited by: 1. pin-to-chip resistance; or by 2. current capability of the chip.

In case of 1, a common cathode/anode configuration and a non-isolated backside, the whole current capability can be used by connecting the backside.

Outlines TO-220AB

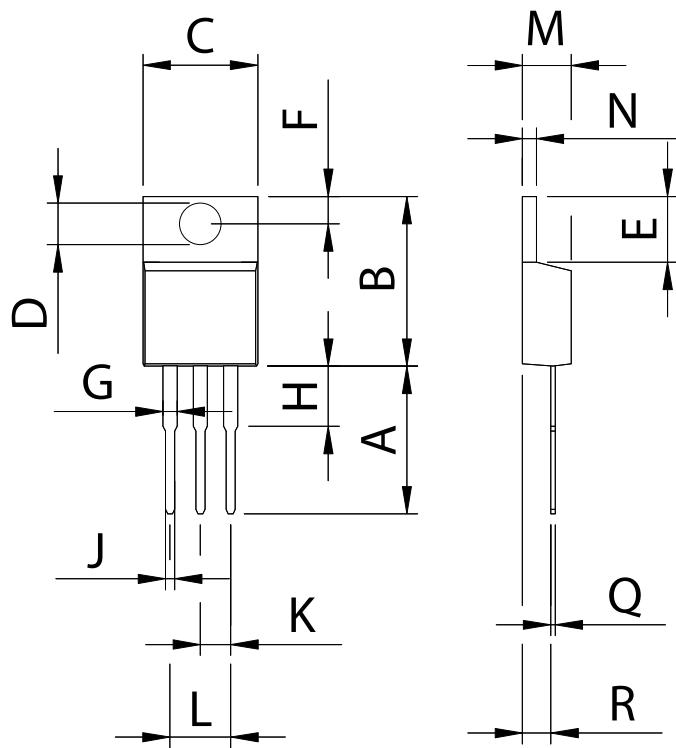

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.35	0.56	0.014	0.022
R	2.29	2.79	0.090	0.110