

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASVK



FEATURES:

- Industrial operating temperature range available
- CMOS output
- Small surface mount package
- Compact and low in height

APPLICATIONS:


- Real time clocks
- System References

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	ASVK Series
Frequency Range	32.768kHz
Operating Temperature	0°C to +70°C (See options)
Storage Temperature	-55°C to +125°C
Frequency Tolerance at 25°C	± 100ppm max. (See options)
Supply voltage (Vdd)	3.3 Vdc ± 10% (see options)
Input Current	7mA max
Output load	15pF or 10TTL
Output voltage	VOH = 0.9*Vdd min.; VOL = 0.1*Vdd max.
Rise and fall time (Tr/Tf)	250ns max.
Start-up time	30 ms max.
Output type	HCMOS
Aging:	± 5ppm/year max. @ 25°C
Symmetry(Duty Cycle)	40/60% (see options)
Tri-state function	Logic "1" (2.0V min) or open = OSC Logic"0" (0.8V max) = Hi Z output disabled

OPTIONS & PART IDENTIFICATION:

[Left blank if standard]

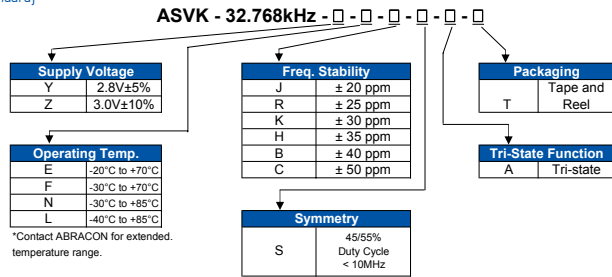

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.07.09**
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

32.768kHz CERAMIC SMD CRYSTAL OSCILLATOR

ASVK



OUTLINE DRAWING:


Dimensions: mm

Recommended Land Pattern


Note:
It is recommended to use an approximately 0.01µF bypass capacitor between PIN 2 and 4.

PIN	FUNCTION
1	TRI-STATE or NC
2	GND
3	Output
4	VCC

TAPE & REEL:

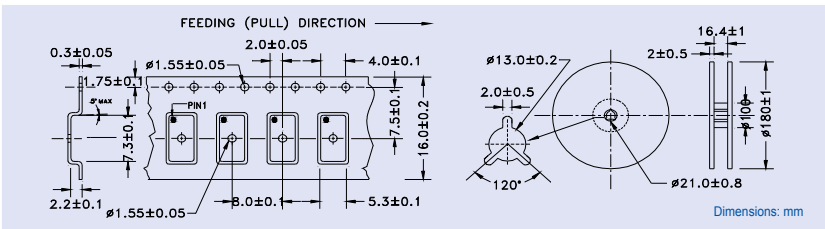

REFLOW PROFILE:

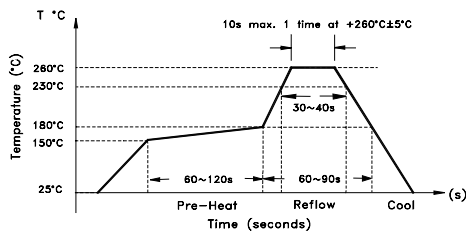

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.07.09**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com