


# 2.5 x 2.0 x 1.2 mm SMD CERAMIC RESONATOR

AWSZT-CW

Pb in ceramic  
(exempt per RoHS 2002/95/EC Annex (7))

RoHS  
Compliant



## FEATURES:

- Low resonant impedance
- IR reflow capable
- Low cost alternative to 2.5 x 2.0 mm size crystal

## APPLICATIONS:

- Remote controls, Microprocessor clocks, Mobile phones, DVD & CD-Roms, Electric appliances
- Consumer electronics

## ELECTRICAL CHARACTERISTICS:


| Item                  | Requirement                     |
|-----------------------|---------------------------------|
| Frequency Range       | 20.00MHz to 50.00MHz            |
| Resonant Impedance    | See Table Below                 |
| Frequency Tolerance   | ± 0.5%                          |
| Frequency Stability   | ±0.2% max. (-25°C to +85°C)     |
| Withstanding Voltage  | 50V (DC , 1 min)                |
| Rating Voltage        |                                 |
| (1) D.C.Voltage       | 6 V.D.C. max                    |
| (2) A.C. Voltage      | 15 Vp-p. max                    |
| Insulation Resistance | 100MΩ min. (10V, 1min)          |
| Operation Temperature | -25°C to +85°C                  |
| Storage Temperature   | -55°C to +85°C                  |
| Aging Rate (Fosc)     | ±0.2% max. (from initial value) |

\* Please contact ABRACON for tighter stability and/or wider temperature range.

Table

| Frequency Range (MHz) | Resonant Impedance (Ro)(Ω) max | Load Capacitance for test circuit C1=C2 (pF) |
|-----------------------|--------------------------------|--|
| 20.00 MHz - 25.99 MHz | 60                             | 10pF ±20%                                    |
| 26.00 MHz - 35.00 MHz | 50                             | 5pF ±20%                                     |
| 35.01 MHz - 50.00 MHz | 50                             | 5pF ±20%                                     |

## TEST CONDITION AND TEST CIRCUIT:

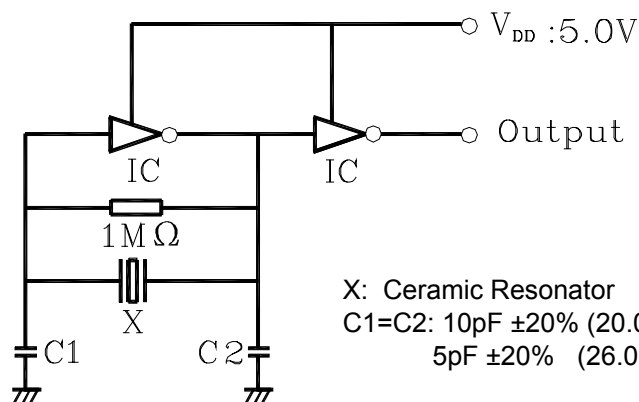

Parts shall be measured under a condition (Temp.: 20±15°C, Humidity: 65±20% R.H.) unless the standard condition (Temp: 25±3°C, Humidity: 65±10% R.H.) is regulated to measure

X: Ceramic Resonator

C1=C2: 10pF ±20% (20.00MHz~25.99MHz)

5pF ±20% (26.00MHz~50.00MHz)

## OPTIONS & PART IDENTIFICATION:

AWSZT - XX.XXXCW - □

**Frequency**  
Frequency in MHz

**Packaging**  
T for Tape and Reel

2.5 x 2.0 x 1.2 mm SMD CERAMIC RESONATOR

AWSZT-CW


Pb in ceramic  
(exempt per RoHS 2002/95/EC Annex (7))

RoHS  
Compliant





2.5 x 2.0 x 1.2 mm

OUTLINE DRAWING:

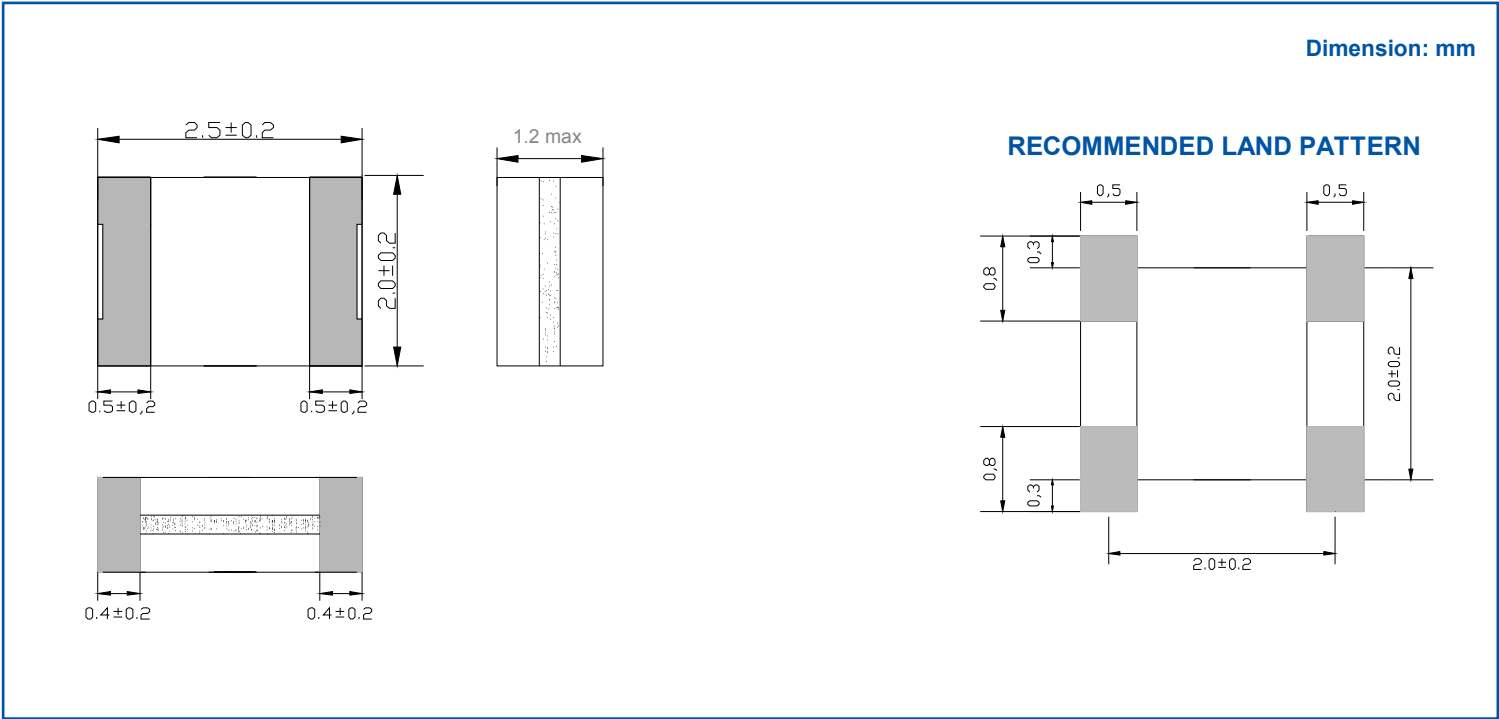

TAPE & REEL: [3,000pcs/reel]

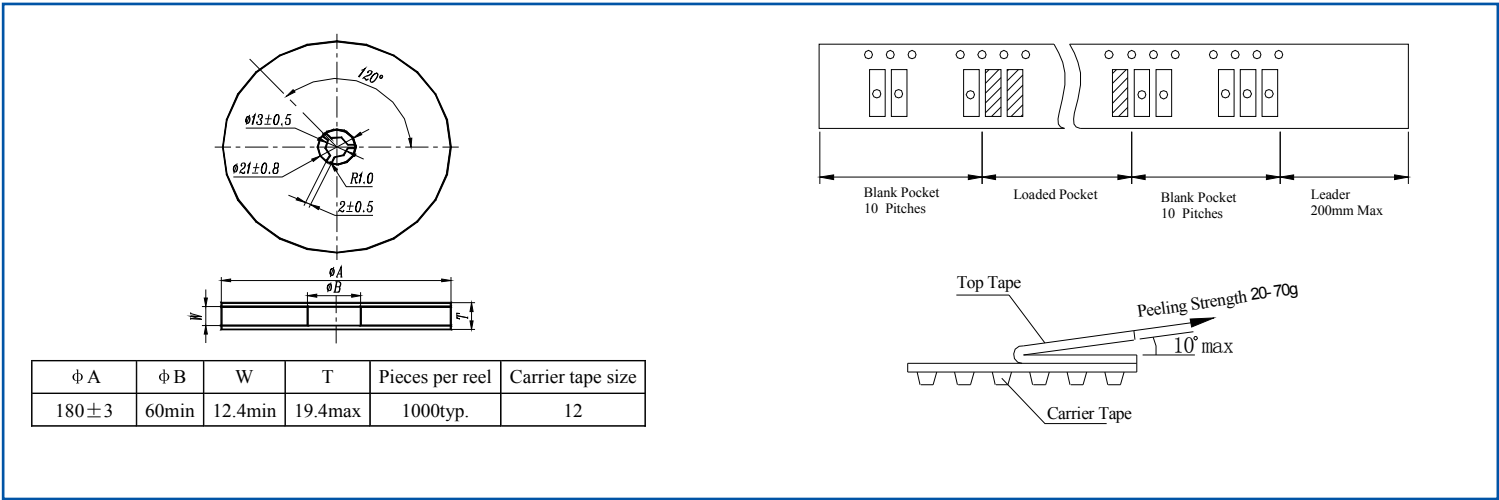

ABRACON  
CORPORATION

# 2.5 x 2.0 x 1.2 mm SMD CERAMIC RESONATOR

AWSZT-CW


Pb in ceramic  
(exempt per RoHS 2002/95/EC Annex (7))

RoHS  
Compliant



2.5 x 2.0 x 1.2 mm

## REFLOW PROFILE:

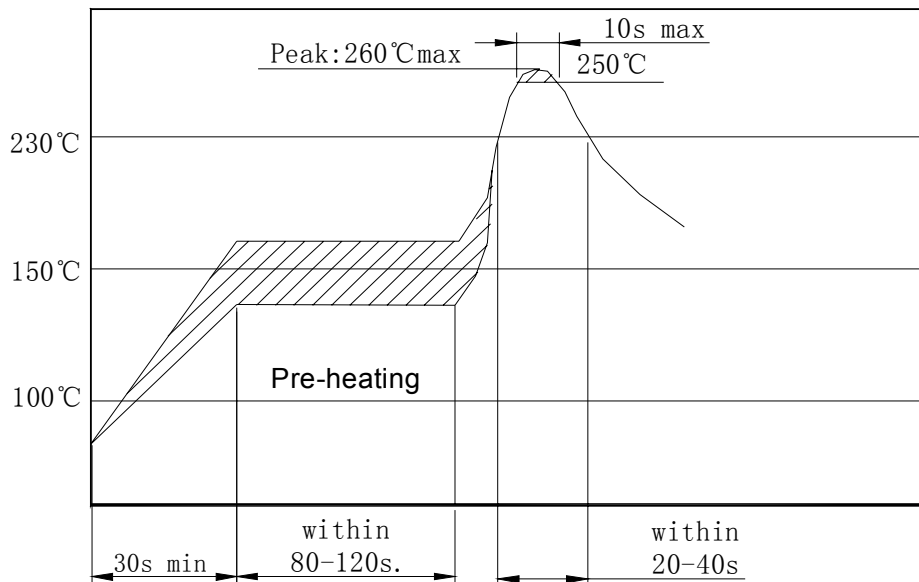

## CAUTION

- Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- This component is not hermetically sealed. Do not clean or wash the component.
- Reflow soldering: Do not use strong acidity flux, such as flux with chlorine content of greater than 0.2wt% during reflow Soldering.
- Do not expose the component to open flame.
- This specification applies to the functionality of the component as a single unit. Customers are advised to insure that the component is thoroughly evaluated in the particular application.
- Shelf life: The warranted shelf life of this product is six months after the delivery date under the conditions of sealed, unopened, original packaging.
- Storage conditions: If the product is to be stored for a period greater than six months after the delivery date, it is recommended that customers confirm the solderability and characteristics for the product prior to use.
- This product is not recommended for use in the following applications: Automotive, Medical, Military, Safety, or any other high-reliability, life-dependant application. Contact Abracon Corporation prior to using this product when in doubt.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 09.02.10**

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)