


REV	DESCRIPTION	DATE	BY	APP'D
0	REL PER NPR	11-26-96	VEC	RC
A	REV PER OGG0-0038-00	2-4-00	REH	REH

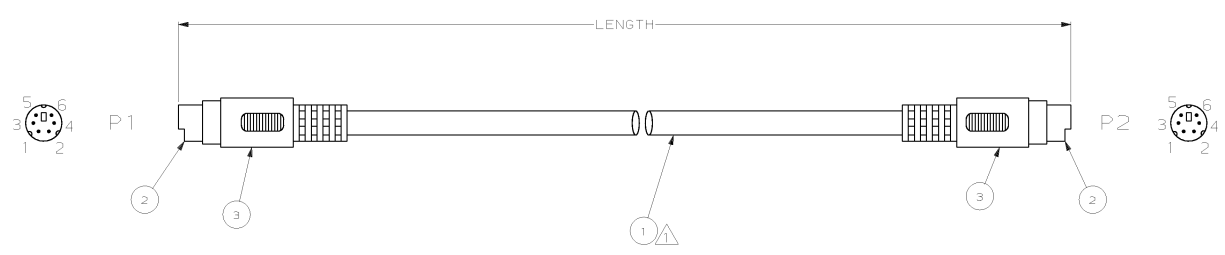

⚠ 28 AWG, STRANDED TINNED COPPER, 6 CONDUCTOR WITH DRAIN, 100% ALUMINUM MYLAR FOIL PLUS 10% NOMINAL OVERLAP. JACKET COLOR BEIGE.

- 2. PACKAGED IN PRINTED ZIPLOCK POLYBAG.
- 3. LABEL ON ZIPLOCK POLYBAG TO READ AS FOLLOWS:

621802-  
XX" M/M 6 PIN MINI DIN EXT.

- 4. THIS PRODUCT IS PRODUCED IN COMPLIANCE WITH ANSI/A50C Z1.4-1993, TO AN INSPECTION LEVEL III, WITH A NORMAL SAMPLING PLAN.

P1 POSN		P2 POSN
1		1
2		2
3		3
4		4
5		5
6		6
SHELL		SHELL VIA DRAIN

PART NUMBER	LENGTH	TOLERANCE	LABEL	
621802-1	72	+6.00/-2.00	6	
621802-2	120	+6.00/-2.00	10	OBSOLETE

OVERMOLD, PVC, BEIGE	3
CONNECTOR, 6 PIN MINI DIN, MALE	2
CABLE	1
DESCRIPTION	ITER NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	11-26-96	BY	COLLER
DIMENSIONS INCHES		DATE	11-26-96	BY	WILSON
MATERIAL		DATE	11-26-96	BY	WILSON
FINISH		DATE	11-26-96	BY	WILSON
CUSTOMER DRAWING		DATE	11-26-96	BY	WILSON
SCALE		NTS		SHEET	1 OF 1
REV		A		REV	

AMP Incorporated  
Harrisburg, PA 17105-3608

**AMP**

CABLE ASSEMBLY, 6 PIN TO 6 PIN, MINI DIN, MALE

SIZE CASE CODE (PRINTING NO.) RESTRICTED TO  
A2 00779 C-621802

621802