


SACC-M12FS-4CON-PG 9-VA

Order No.: 1553268

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1553268>Sensor/actuator connector, female, straight, 4-pos., M12, screw
connection, high-grade steel knurl, cable screw connection PG9**Commercial data**

GTIN (EAN)	
sales group	D121
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 211 (PC-2011)

Product notesWEEE/RoHS-compliant since:
11/10/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ


Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67/IP69K
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	PBT
Material, knurls	High-grade steel
Sealing material	NBR
Connection method	Screw connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	18
External cable diameter	6 mm ... 8 mm
Status display	No

Diagrams/Drawings


Dimensioned drawing

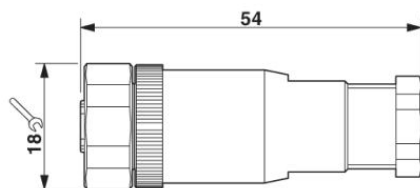

M12 x 1 female connector, straight

Schematic diagram

Pin assignment M12 socket, 4-pos., A-coded, view female side

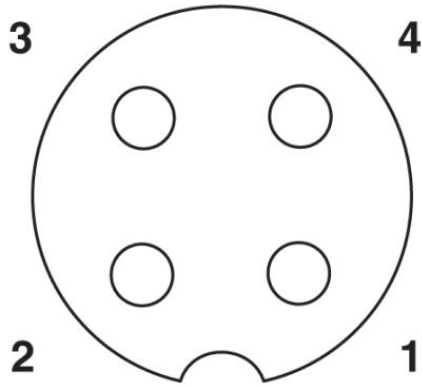

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;