



Series 8XXX Collet Elevator Sockets on .200 [5.08] Centers

FEATURES:

- Ideal for elevating devices (displays, switches, etc.) to desired level with .285 to 1.250 [7.24 to 31.75] height extension.

SPECIFICATIONS:

- Standard socket body and spacer are black UL 94V-0 Glass Filled 4/6 Nylon.
- Pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-00.
- Pin body plating either 200µ [5.08µm] min. 93/7 Tin/Lead per ASTM B545 or 200µ [5.08µm] min. Tin per ASTM B545 Type 1 over 100µ [2.54µm] min. Nickel per SAE-AMS-QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-01.
- Contact plating is 30µ [7.7µm] min. Gold per MIL-G-45204 over 50µ [1.27µm] min. Nickel per SAE-AMS-QQ-N-290.
- Contact current rating=3 Amps.
- Operating temperature= -67°F to 221°F [-55°C to 105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; based on a .018 [46] diameter test lead.
- Accepts leads .015-.025 [38-.64] in diameter, .110-.150 [2.79-3.81] long.

MOUNTING CONSIDERATIONS:


- Suggested PCB hole size= .035 ± .002 [.89 ± .05] dia.

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13] unless otherwise specified

"A"=NO. OF PINS PER ROW X .100 [2.54]


"B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

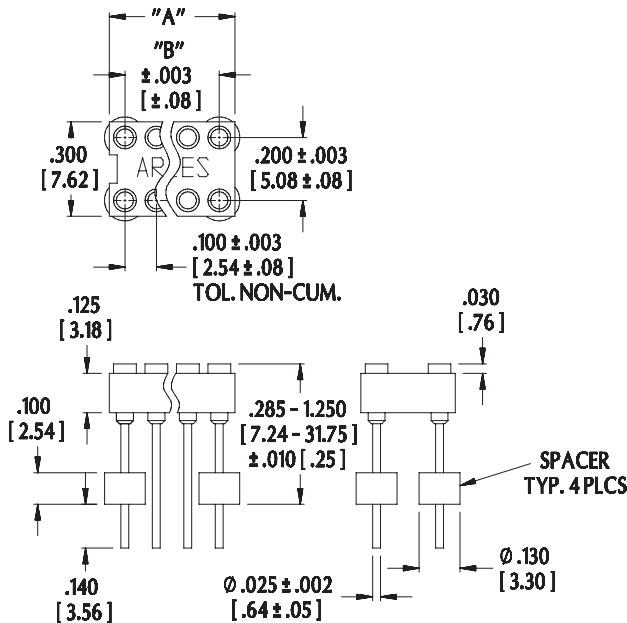

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION


XX-8XXXX-210CXX

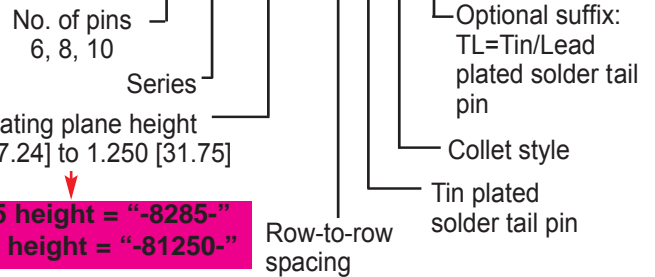

ex: .285 height = "-8285-"
1.250 height = "-81250-"

Consult Data Sheet No. 13008 for collet elevator sockets on .300 [7.62] and .600 [15.24] centers.

Consult Data Sheet No. 13006 for elevator sockets with bifurcated contacts.



Bristol, PA USA
TEL: (215) 781-9956
FAX: (215) 781-9845



13007
REV. F