


1. E and unless otherwise specified all dimensions are in inches.
 2. All dimensions are to be held to the nearest 0.001 inch.
 3. All dimensions are to be held to the nearest 0.005 inch.
 4. All dimensions are to be held to the nearest 0.010 inch.
 5. All dimensions are to be held to the nearest 0.020 inch.
 6. All dimensions are to be held to the nearest 0.050 inch.
 7. All dimensions are to be held to the nearest 0.100 inch.
 8. All dimensions are to be held to the nearest 0.200 inch.
 9. All dimensions are to be held to the nearest 0.500 inch.
 10. All dimensions are to be held to the nearest 1.000 inch.

REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	BY
	P	11/10/54 - NO CHANGE, UPDATING TO LATEST STANDARDS	11/10/54	S.F.
	R	REVISED PLATING	1/11/55	22005 R.P.
	S	ADDED NOTE 4, (X F NC)	7/1/55	31895 K.S. DR
	T	NOTE 2 & 3 W/PLATE NOTES, ADDED NOTES 5-9, ADDED CABLE DIMENSIONS.	11/29/55	1731 J.R.

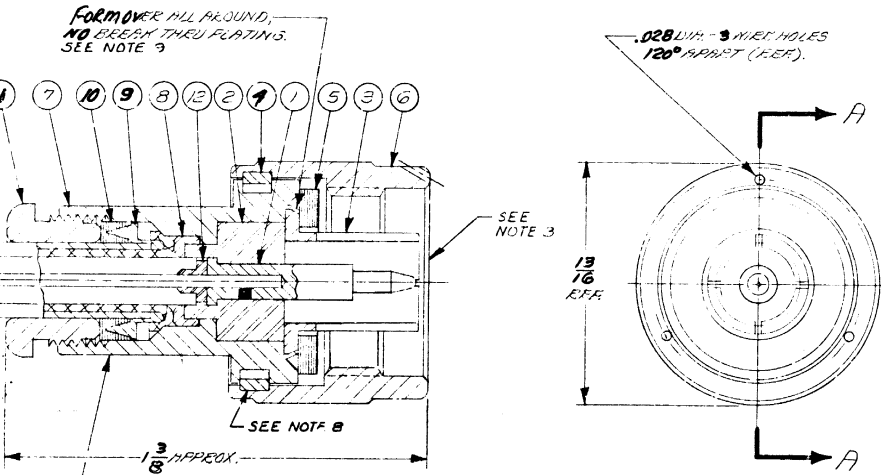

34525
 DRAWING NUMBER: 34525
 SHEET 7

- NOTE
- ITEM 12 IS NOT USED WITH RG-59/U CABLE.
 - PLATING MUST CONFORM TO SPEC. 347-50560. CONTACT IS SILVER PLATED. ALL OTHER METAL PARTS ARE ASTHROPLATED (REF)
 - MUST CONFORM TO SPEC. 347-50551, SECT. 911.
 - THIS DRAWING HAS BEEN DECODED FOR THE FOLLOWING CUSTOMER SPECS.: RE-B-49211, BELL TEL. 6-221684, 30-B-66983-2 AND GE NO. 262A6166-2 REV 1.
 - ITEMS 1, 9, 10, 11 & 12 ARE SHIPPED LOOSE.
 - * ASTERISK INDICATES CABLE DIMENSIONS.
 - PACKAGE THIS CONNECTOR IN BAG 997-226.
 - WAX DIP BEFORE ASSEMBLY.
 - STAKE IN 6 PLACES TO RETAIN INSULATOR. DO NOT DISTORT ASSEMBLY. ITEM 3 MUST NOT ROTATE UNDER FINGER PRESSURE & MUST RESIST A 25 LB. PUSH OUT FORCE.

QTY	PART NO	DESCRIPTION	REMARKS
1	12	81132	INS. BUSHING
1	11	31-1428-3H	CLAMP NUT
1	10	31-1051-2	CLAMP GASKET
1	9	82-1551-3H	BRAND CLAMP
1	8	31-1095H	CLAMP FUSHING
1	7	34028-G	BODY
1	6	82-2153-1H	COUPLING NUT
1	5	82-1535-1	GASKET
1	4	82-1535-B	RETAINING RING
1	3	82-2849G	OUTER CONTACT
1	2	34527	INSULATOR
1	1	34526-F	INNER CONTACT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES 1/16 2 .005 2 1/2	DRAWN BY 6-10-55	CHECKED 6-14-55	DATE	TITLE IMPROVED N-1 LUG FOR RG-59/U & 62/U CABLE UG-603A/U
MATERIAL H	APPROVED 11/29/55	DATE	11/29/55	Amphenol RF DIVISION 33 EAST FRANKLIN STREET DANBURY, CONNECTICUT 06813
SPECIFICATION H	REFERENCE DRAWING NO SEE NOTE 4	CODE IDENTIFICATION C	DRAWING SIZE 34525	SHEET 7
FINISH SEE LIST OF MATERIAL	SCALE 1/1			

OFFICIAL ENG. REL
 7859
 2-27-63