


# USLKG 95


Order No.: 0441041

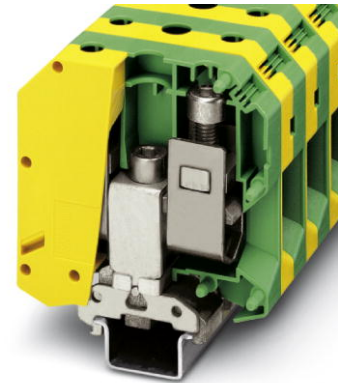

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0441041>


Ground modular terminal block, Connection method: Screw connection, Screw connection, Cross section: 25 mm<sup>2</sup> - 95 mm<sup>2</sup>, AWG 4 - 3/0, Width: 25 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15, NS 32



| Commercial data          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 017918 002145 |
| sales group              | A020  |
| Pack                     | 10 pcs.   |
| Customs tariff           | 85369010  |
| Catalog page information | Page 37 (CL1-2011)  |

**Product notes**

WEEE/RoHS-compliant since: 09/01/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data        |              |
|-----------------------|--------------|
| <b>General</b>        |              |
| Number of levels      | 1            |
| Number of connections | 2            |
| Color                 | green-yellow |

|                                    |    |
|------------------------------------|----|
| Insulating material                | PA |
| Inflammability class acc. to UL 94 | V2 |

**Dimensions**

|                 |         |
|-----------------|---------|
| Width           | 25 mm   |
| Length          | 83 mm   |
| Height NS 35/15 | 97.5 mm |
| Height NS 32    | 95.5 mm |

**Technical data**

|                                  |   |
|----------------------------------|---|
| Maximum load current             | 232 A (with 95 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage              | 8 kV  |
| Pollution degree                 | 3   |
| Surge voltage category           | III   |
| Insulating material group        | I   |
| Connection in acc. with standard | IEC 60947-7-2   |
| Nominal current I <sub>N</sub>   | 232 A   |
| Open side panel                  | nein  |

**Connection data**

|  |                    |
|--|--------------------|
| Conductor cross section solid min.   | 25 mm <sup>2</sup> |
| Conductor cross section solid max.   | 95 mm <sup>2</sup> |
| Conductor cross section stranded min.                                      | 35 mm <sup>2</sup> |
| Conductor cross section stranded max.                                      | 95 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min.                                     | 4                  |
| Conductor cross section AWG/kcmil max                                      | 3/0                |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 35 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 95 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve min.    | 35 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.    | 95 mm <sup>2</sup> |
| 2 conductors with same cross section, solid min.                           | 25 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.                           | 35 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded min.                        | 25 mm <sup>2</sup> |

|   |                    |
|---|--------------------|
| 2 conductors with same cross section, stranded max.                                   | 35 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 16 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 35 mm <sup>2</sup> |
| Connection method   | Screw connection   |
| Stripping length  | 30 mm              |
| Screw thread  | M8                 |
| Tightening torque, min  | 15 Nm              |
| Tightening torque max   | 20 Nm              |

### Certificates / Approvals



Certification

CSA, CUL, GL, GOST, LR, PRS, RS, UL

Certification Ex:

IECEX, KEMA-EX

### Accessories

| Item            | Designation                   | Description   |
|-----------------|-------------------------------|---|
| <b>Assembly</b> |                               |   |
| 1201028         | NS 32 AL UNPERF 2000MM        | G rail 32 mm (NS 32)  |
| 1201280         | NS 32 CU/120QMM UNPERF 2000MM | G-profile DIN rail, deep-drawn, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m |
| 1201358         | NS 32 CU/35QMM UNPERF 2000MM  | G-profile DIN rail, material: Copper, unperforated, height 15 mm, width 32 mm, length 2 m             |
| 1201002         | NS 32 PERF 2000MM             | G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m                |
| 1201015         | NS 32 UNPERF 2000MM           | G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m              |
| 1201895         | NS 35/15 CU UNPERF 2000MM     | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m        |
| 1201730         | NS 35/15 PERF 2000MM          | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m                         |
| 1201714         | NS 35/15 UNPERF 2000MM        | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m                       |


---

**Marking**

|         |             |   |
|---------|-------------|---|
| 1050525 | ZB10:SO/CMS | Zack strip, 10-section, divisible, special printing, marking according to customer requirements |
|---------|-------------|---|

**Diagrams/Drawings**

Circuit diagram

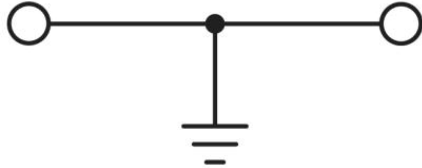

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;