


VIP-2/SC/FLK50/S7/A-S400

Order No.: 2322359


The figure shows a version with MODICON[®] TSX Quantum labeling

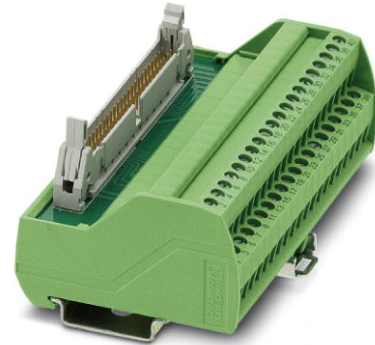

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322359>


VARIOFACE interface module, for I/Os of the SIMATIC[®] S7-400, with SIMATIC[®]-specific marking, only in conjunction with FLKM 50-PA-S400



Commercial data	
GTIN (EAN)	
sales group	I550
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 250 (IF-2011)

Product notes

WEEE/RoHS-compliant since:
04/10/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Nominal voltage U_N	60 V AC/DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	2 A
Number of positions	50

Width	106.1 mm
Height	65.5 mm
Depth	56 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	Field level
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	Control system level
Number of connections	1
Connection method	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	50

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings

Circuit diagram

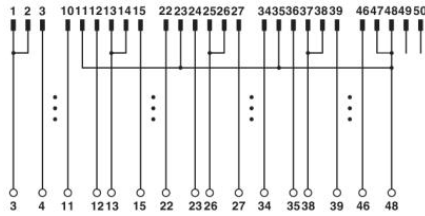

VIP-2/SC/FLK50/S7/A-S400 connection scheme

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;