



crydom®



[home](#)
 [products](#)
 [sales](#)
 [support](#)
 [contact us](#)
 [about us](#)

Solid State Relays - Panel Mount: A12/D24



Features

SCR output • 10-90Amp • 120/240 Vrms • AC Switching • AC/DC control • Crydom's signature relay family also know as the Series 1 product family.

Product	INPUT SPECIFICATIONS	OUTPUT SPECIFICATIONS			
	Control Voltage Range	Load Current	Switching Voltage Type	Turn On	Load Voltage Range
D1210	3-32 Volts DC	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS
D1210-10	3-32 Volts DC	0.04-10 Amps RMS	AC	Random	24-140 Volts RMS
D1210-B	3-32 Volts DC	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS
D1225	3-32 Volts DC	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
D1225-10	3-32 Volts DC	0.04-25 Amps RMS	AC	Random	24-140 Volts RMS
D1225-B	3-32 Volts DC	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
D1240	3-32 Volts DC	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS

A2410-10	90-280 Volts RMS	0.04-10 Amps RMS	AC	Random	24-280 Volts RMS
A2410-B	90-280 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2410E	18-36 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2410E-10	18-36 Volts RMS	0.04-10 Amps RMS	AC	Random	24-280 Volts RMS
A2410E-B	18-36 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2425	90-280 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2425-10	90-280 Volts RMS	0.04-25 Amps RMS	AC	Random	24-280 Volts RMS
A2425-B	90-280 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2425E	18-36 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2425E-10	18-36 Volts RMS	0.04-25 Amps RMS	AC	Random	24-280 Volts RMS
A2425E-B	18-36 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2450	90-280 Volts RMS	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2450-10	90-280 Volts RMS	0.04-50 Amps RMS	AC	Random	24-280 Volts RMS
A2450-B	90-280 Volts RMS	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2450E	18-36 Volts RMS	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2450E-10	18-36 Volts RMS	0.04-50 Amps RMS	AC	Random	24-280 Volts RMS
A2450E-B	18-36 Volts RMS	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2475	90-280 Volts RMS	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS

A1210-10	90-280 Volts RMS	0.04-10 Amps RMS	AC	Random	24-140 Volts RMS
A1210-B	90-280 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1210E	18-36 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1210E-10	18-36 Volts RMS	0.04-10 Amps RMS	AC	Random	24-140 Volts RMS
A1210E-B	18-36 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1225	90-280 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1225-10	90-280 Volts RMS	0.04-25 Amps RMS	AC	Random	24-140 Volts RMS
A1225-B	90-280 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1225E	18-36 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1225E-10	18-36 Volts RMS	0.04-25 Amps RMS	AC	Random	24-140 Volts RMS
A1225E-B	18-36 Volts RMS	0.04-25 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1240	90-280 Volts RMS	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1240-10	90-280 Volts RMS	0.04-40 Amps RMS	AC	Random	24-140 Volts RMS
A1240-B	90-280 Volts RMS	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1240E	18-36 Volts RMS	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS
A1240E-10	18-36 Volts RMS	0.04-40 Amps RMS	AC	Random	24-140 Volts RMS
A1240E-B	18-36 Volts RMS	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS
A2410	90-280 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS

D1240-10	3-32 Volts DC	0.04-40 Amps RMS	AC	Random	24-140 Volts RMS
D1240-B	3-32 Volts DC	0.04-40 Amps RMS	AC	Zero cross	24-140 Volts RMS
D2410	3-32 Volts DC	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2410-10	3-32 Volts DC	0.04-10 Amps RMS	AC	Random	24-280 Volts RMS
D2410-B	3-32 Volts DC	0.04-10 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2425	3-32 Volts DC	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2425-10	3-32 Volts DC	0.04-25 Amps RMS	AC	Random	24-280 Volts RMS
D2425-B	3-32 Volts DC	0.04-25 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2450	3-32 Volts DC	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2450-10	3-32 Volts DC	0.04-50 Amps RMS	AC	Random	24-280 Volts RMS
D2450-B	3-32 Volts DC	0.04-50 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2475	3-32 Volts DC	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2475-10	3-32 Volts DC	0.04-75 Amps RMS	AC	Random	24-280 Volts RMS
D2475-B	3-32 Volts DC	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2490	3-32 Volts DC	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS
D2490-10	3-32 Volts DC	0.04-90 Amps RMS	AC	Random	24-280 Volts RMS
D2490-B	3-32 Volts DC	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS
A1210	90-280 Volts RMS	0.04-10 Amps RMS	AC	Zero cross	24-140 Volts RMS

A2475-10	90-280 Volts RMS	0.04-75 Amps RMS	AC	Random	24-280 Volts RMS
A2475-B	90-280 Volts RMS	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2475E	18-36 Volts RMS	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2475E-10	18-36 Volts RMS	0.04-75 Amps RMS	AC	Random	24-280 Volts RMS
A2475E-B	18-36 Volts RMS	0.04-75 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2490	90-280 Volts RMS	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2490-10	90-280 Volts RMS	0.04-90 Amps RMS	AC	Random	24-280 Volts RMS
A2490-B	90-280 Volts RMS	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2490E	18-36 Volts RMS	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS
A2490E-10	18-36 Volts RMS	0.04-90 Amps RMS	AC	Random	24-280 Volts RMS
A2490E-B	18-36 Volts RMS	0.04-90 Amps RMS	AC	Zero cross	24-280 Volts RMS

- Zero Voltage and Random Turn-On Switching
- Panel Mount
- 600V Transient Capability
- Internal Snubber
- 110 & 125A Models Available
- Integrated Overvoltage Protection by Automatic Self Turn-On (Suffix P)

Featuring state-of-the-art Surface Mount Technology, these SPST-NO relays deliver proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross, random turn-on (phase controllable) and normally closed (Form B) versions with either AC or DC input (coil) control. Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	AC CONTROL	A1210	A1225	A1240	A2410	A2425	A2450	A2475	A2490
	DC CONTROL	D1210	D1225	D1240	D2410	D2425	D2450	D2475	D2490
OUTPUT SPECIFICATIONS ①									
Operating Voltage (47-63 Hz) [Vrms]		24-140	24-140	24-140	24-280	24-280	24-280	24-280	24-280
Max. Load Current ③ [Arms]		10	25	40	10	25	50	75	90
Min. Load Current, [mArms]		40	40	40	40	40	40	40	40
Transient Overvoltage [Vpk]		400	400	400	600	600	600	600	600
Max. Surge Current, (16.6ms) [Apk]		120	250	625	120	250	625	1000	1200
Max. On-State Voltage Drop @ Rated Current [Vpk]		1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
Thermal Resistance Junction to Case (R _{qJC}) [°C/W]		1.48	1.02	0.63	1.48	1.02	0.63	0.31	0.28
Maximum I ² t for Fusing, (8.3 msec.) [A ² sec]		60	260	1620	60	260	1620	4150	6000
Max. Off-State Leakage Current @ Rated Voltage [mArms]		8	8	8	10	10	10	10	10
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②		500	500	500	500	500	500	500	500
Max. Turn-On Time ④		1/2 Cycle (DC Control), 10.0 msec (AC Control)							
Max. Turn-Off Time		1/2 Cycle (DC Control), 40.0 msec (AC Control)							
Power Factor (Min.) with Max. Load		0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

INPUT SPECIFICATIONS ①	DC CONTROL	AC CONTROL	24V AC/DC CONTROL (E SUFFIX)
	Control Voltage Range	3-32 Vdc	90-280 Vrms (60Hz)
Max. Reverse Voltage	-32 Vdc	—	—
Max. Turn-On Voltage	3.0 Vdc	90 Vrms	18 Vrms/Vdc
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms	4.0 Vrms/Vdc
Nominal Input Impedance	1500 Ohms	60K Ohms	9.0K Ohms
Typical Input Current	3.4mA @ 5 Vdc, 20mA @ 28Vdc	2mA @ 120 Vrms, 4mA @ 240 Vrms	3mA @ 24 V

GENERAL NOTES

© 2007 CRYDOM CORP, Specifications subject to change without notice.

- ① All parameters at 25° C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ Heat sinking required, for derating curves see page 3.
- ④ Turn-on time for random turn-on versions is 0.02 msec (DC Control Models).



GENERAL SPECIFICATIONS



Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 ⁹ Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C

MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Screws and Saddle Clamps Furnished, Unmounted

AVAILABLE OPTIONS

- B** Normally Closed (Form B)
Example: **D2450-B, A2450-B**
- E** 24V AC/DC Input
Example: **A2450E**
- F** Faston Terminals (Up to 50A Models)
Example: **D1225F**
- G** Input Status LED.
Example: **D2450G**
Note: Control Voltage Range 4.5-32Vdc for DC Control Models.
- P** Internal Overvoltage Protection.
Relay Will Self Trigger Between 450-600 Vpk. Not Suitable For Capacitive Loads.
Not Available with -B Option
Example: **D2425P**
- 4D** 400 Hz Operation
10-50 Amp Models Only
Zero Cross Switching Only
Example: **4D2450**
- 10** Random Turn-On (AC & DC Control)
Phase Controllable (DC Control)
Example: **D2450-10**
- H** Heat Transfer Pad (Attached)
Example: **D2450H**

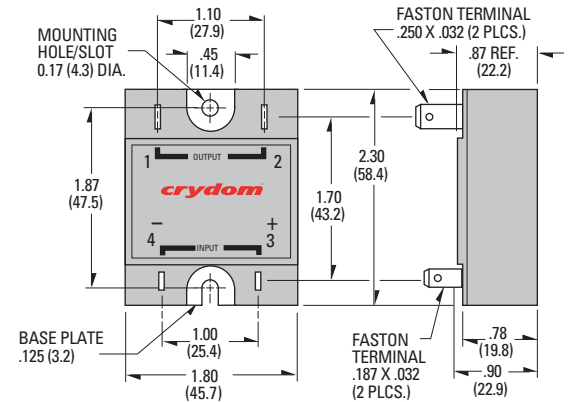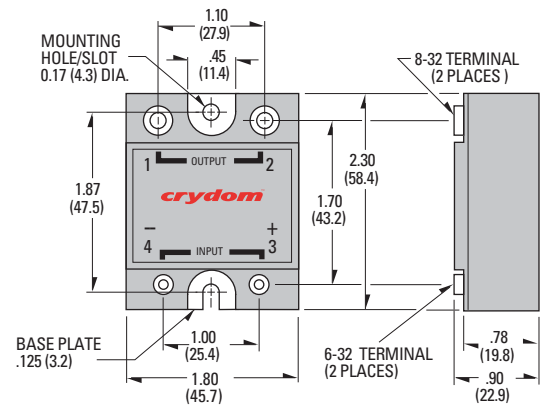

Screw Torque Requirements:

6-32 Screws - 10 in. lbs.,
8-32 and 10-32 Screws - 20in. lbs.
(Screws dry without grease.)

Fastons:

Single pair (up to 25A)
Double pair* (up to 50A).

***Caution: User must connect to both pairs**

Crydom Heat Sinks offer excellent thermal management and are perfectly matched to the load current ratings of Crydom panel mount relays. Request Crydom's Heat Sink specification sheet for all the details.

All dimensions are in inches (millimeters)

© 2007 CRYDOM CORP, Specifications subject to change without notice.

APPROVALS

UL E116949
CSA LR81689
VDE 10143 UG (Not Applicable: -B and 4D)

