

SEARCH OUR PRODUCTS



Aluminum Electrolytic Capacitors

+85°C Standard Axial Lead Aluminum Electrolytic Capacitors



Part Number: 226TTA250M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[TTA document \(PDF\)](#)

Electrical Specifications

Capacitance: 22.0 uF

Tolerance: -20 %, +20 %

Dissipation Factor: 0.2 at 120 Hz

ESR: 15.072 Ohms at 20° C and 120 Hz

Impedance:

- and -

- and -

Impedance Ratios:

3.0 -25°C/20°C

6.0 -40°C/20°C

Load Life:

2000 Hours at 85°C with 100% of rated voltage and with 0% of rated ripple current

Temperature Range: -40°C to +85°C

WVDC: 250 volts DC

SVDC: 300. volts DC

Leakage Current:

320.0 uA after 1 Minute

Ripple Current:

140.0 mA at 120 Hz and 85°C


Physical Specifications

Diameter (D): 12.5 mm + 0.8 mm

Length (L): 25.0 mm + 2.0 mm

Lead Wire Diameter (d): 0.6 mm + 0.05 mm

Lead Length: 35mm

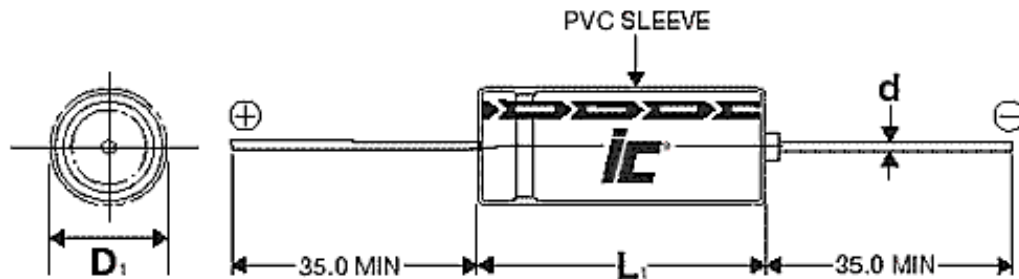

Add To Sample Cart
(You can always remove it later)

TECH TOOLS



film



power film



tantalum ceramic