

#### Features/Benefits

- 3 AMPS to 10 AMPS
- Quick connect terminals
- Double pole in miniature size
- Recessed bracket available—prevents accidental actuation

## Typical Applications

- Computers
- **Appliances**
- Electric ranges



# **Specifications**

CONTACT RATING: DM2X Models: 3 AMPS @ 125 V AC; 2 AMPS @ 250 V AC (UL/CSA), DM6X Models: 10 AMPS @ 125 V AC: 5 AMPS @ 250 V AC (UL/CSA). 6 AMPS @ 125 V AC, 3 AMPS @ 250 V AC, T85 (VDE).

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

INSULATION RESISTANCE:  $10^9 \Omega$  min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

#### Materials

HOUSING & ACTUATOR: 6/6 nylon (UL94V-2), black.

MOVABLE CONTACTS: DM2X Models: Copper, silver plated.

DM6X Models: Coin silver, silver plated.


STATIONARY CONTACTS & TERMINALS: Copper or brass, silver plated.

CONTACT SPRING: Music wire or stainless steel.

NOTE: Specifications and materials listed above are for standard switches. For information on specific and custom switches, consult Customer Service Center.

### **Build-A-Switch**

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages G-57 and G-58. For additional options not shown in catalog, consult Customer Service Center.

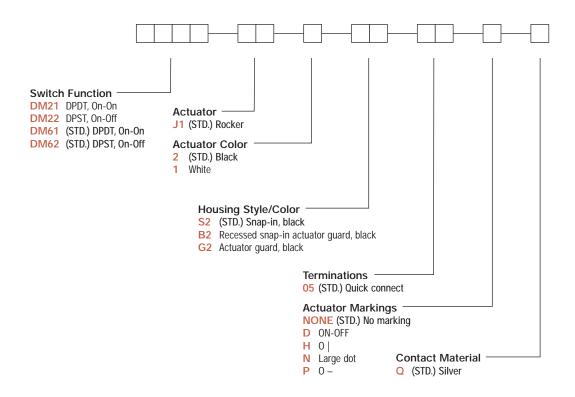








Dimensions are shown: IN (mm) Dimensions subject to change

# **C&K DM Series** Miniature 2 Pole Power Rocker Switches

#### **SWITCH FUNCTION**

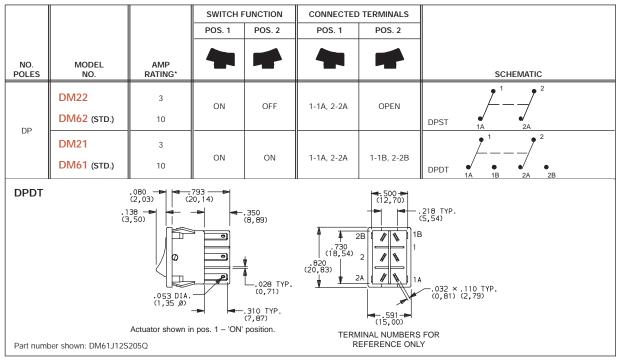


<sup>\*</sup> RATINGS: See page G-58 for complete ratings.

All models \*\* with all options. DM6X models also \*\* see page G-58.



#### J1 (STD.) ROCKER




OPTION CODE	ACTUATOR COLOR
2	(STD.) BLACK
1	WHITE

NOTE: Actuator finish: matte. Other colors available, consult Customer Service Center.

#### HOUSING STYLE/COLOR


**S2** (STD.) SNAP-IN, BLACK



NOTE: Housing finish: matte. Other colors available, consult Customer Service Center

Downloaded from Elcodis.com electronic components distributor

**B2** RECESSED SNAP-IN ACTUATOR GUARD, BLACK





Dimensions are shown: IN (mm) Dimensions subject to change



Cannon

G