


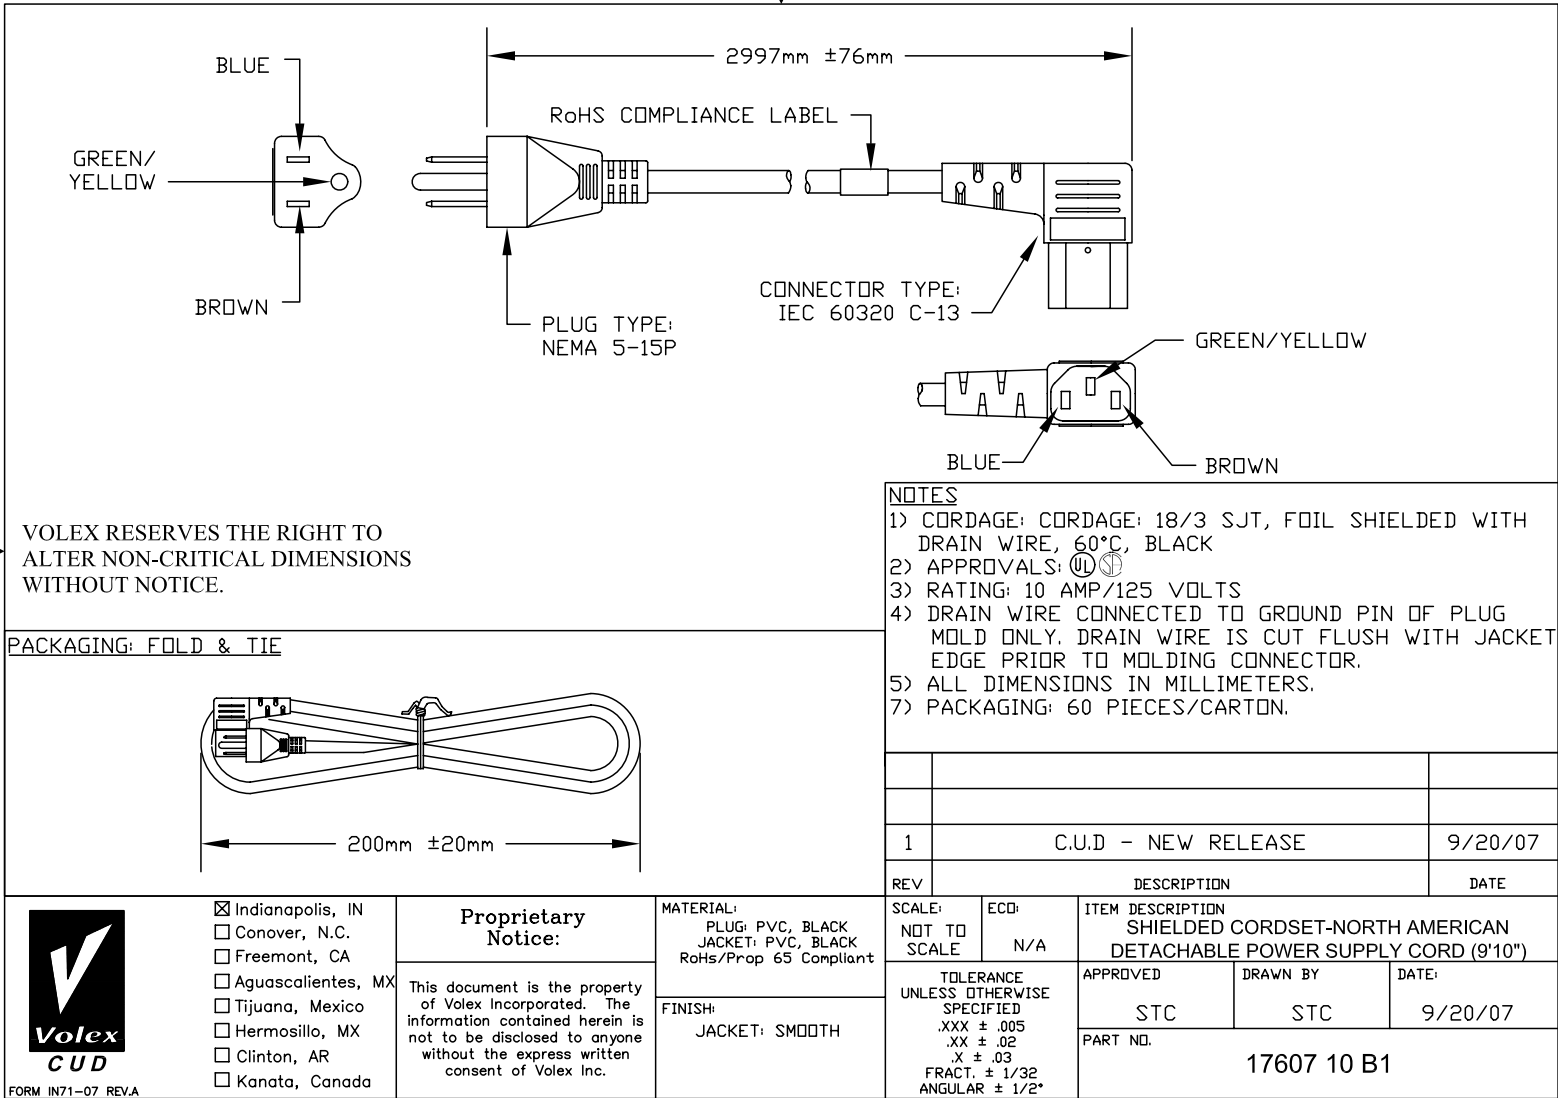
VOLEX

GROUP

Standard Cord Details: 17607 10 B1




Specifications	
Certifications	
Part Number	17607 10 B1
Connector Type	C13
Plug Type	5-15P
Category	Plastic
Application	Detachable
Plug Catalog No.	PS204
Connector Catalog No.	V1625A
Cable	SJT AWG 18x3 (Shielded)
Jacket Color	black
Length in Feet	9'10"
Length in Meters	3
Temperature Rating	60 C
Packaging Units Per Carton	H-75,H-25
Color Coding	International
Nominal OD in Inches	0.328
Nominal OD in Millimeters	8.33




VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: FOLD & TIE

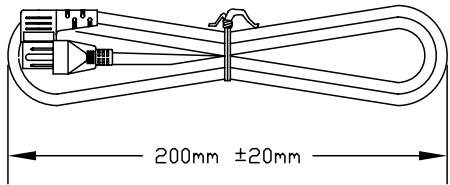

- NOTES**
- 1) CORDAGE: CORDAGE: 18/3 SJT, FOIL SHIELDED WITH DRAIN WIRE, 60°C, BLACK
 - 2) APPROVALS:
 - 3) RATING: 10 AMP/125 VOLTS
 - 4) DRAIN WIRE CONNECTED TO GROUND PIN OF PLUG MOLD ONLY. DRAIN WIRE IS CUT FLUSH WITH JACKET EDGE PRIOR TO MOLDING CONNECTOR.
 - 5) ALL DIMENSIONS IN MILLIMETERS.
 - 7) PACKAGING: 60 PIECES/CARTON.

REV	DESCRIPTION	DATE
1	C.U.D - NEW RELEASE	9/20/07



FORM IN71-07 REV.A

- Indianapolis, IN
- Conover, N.C.
- Freemont, CA
- Aguascalientes, MX
- Tijuana, Mexico
- Hermosillo, MX
- Clinton, AR
- Kanata, Canada

Proprietary Notice:
This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

MATERIAL:
PLUG: PVC, BLACK
JACKET: PVC, BLACK
RoHS/Prop 65 Compliant

FINISH:
JACKET: SMOOTH

SCALE: NOT TO SCALE	ECD: N/A	ITEM DESCRIPTION SHIELDED CORDSET-NORTH AMERICAN DETACHABLE POWER SUPPLY CORD (9'10")		
TOLERANCE UNLESS OTHERWISE SPECIFIED .XXX ± .005 .XX ± .02 .X ± .03 FRACT. ± 1/32 ANGULAR ± 1/2°		APPROVED STC	DRAWN BY STC	DATE: 9/20/07
PART NO.		17607 10 B1		