


**SOCKET PINS for 0.042" & 0.055" Dia. HOLES**

VECTOR PART SERIES : R30, R31, R32, R50, R51, R52, R53

**0.042" Dia. Holes : R32 Series**

Low profile wire-wrap socket pins  
 Pressfit mounting with 3 Level wire wrap on 0.025" square posts  
 Four-finger contacts, tapered sockets for easy insertion  
 Accepts 0.015 - 0.025 diameter leads  
 Gold-plated contact surfaces ( 30 micro inch Gold over Nickel )  
 Gold finish shell ( 10 micro inch Gold over Nickel )  
 Male pin depth : 0.13"  
 Use P158 Insertion Tool with D9 Die Point.


Ordering Table	Part No.	Pkg. Qty.
	R32/C	100
	R32/M	1000

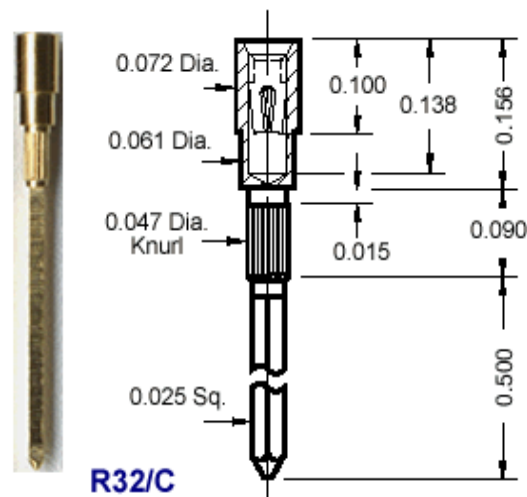

**0.055" Dia. Holes : R31 Series**

Low profile wire-wrap socket pins  
 Pressfit mounting with 3 Level wire wrap on 0.025" square posts  
 Four-finger contacts, tapered sockets for easy insertion  
 Gold-plated contact surfaces ( 30 micro inch Gold over Nickel )  
 Gold finish shell ( 10 micro inch Gold over Nickel )  
 Male pin depth : 0.17"  
 Use P158 Insertion Tool with D10 Die Point.


Ordering Table	Part No.	Pkg. Qty.
	R31/C	100
	R31/M	1000

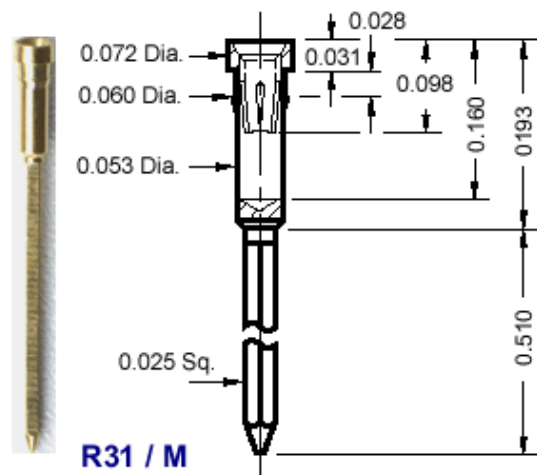

**0.055" Dia. Holes : R30 Series**

Low profile, pressfit pins for hand or dip solder applications  
 Solder post extends 0.19 below and 0.030 above board surface  
 Four-finger contacts, tapered sockets for easy insertion  
 Gold-plated contact surfaces ( 30 micro inch Gold over Nickel )  
 Gold finish shell ( 10 micro inch Gold over Nickel )  
 Male pin depth : 0.17"  
 Use P158 Insertion Tool with D10 Die Point.

Ordering Table	Part No.	Pkg. Qty.
	R30/C	100
	R30/M	1000

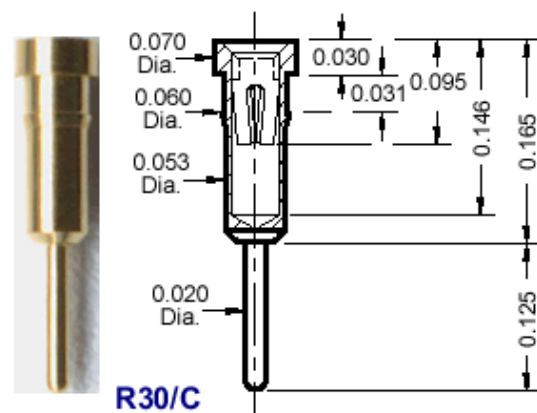

**0.055" Dia. Holes : R52 & R53 Series**

Low profile wire-wrap socket pins

Gold-plated contact surfaces ( 30 micro inch Gold over Nickel )

Tin/Lead finish shell ( 200 micro inch Tin/Lead over Nickel )


3 Level wire wrap on 0.025" square posts

Use P158 Insertion Tool with D10 Die Point.

R52 : Four figure contacts, 3 level wire wrap on 0.025" square posts

R53 : Six figure contacts, 3 level wire wrap on 0.025" square posts

Ordering Table	Part No.	Pkg. Qty.
	R52/C	100
	R52/M	1000
	R53/C	100
	R53/M	1000

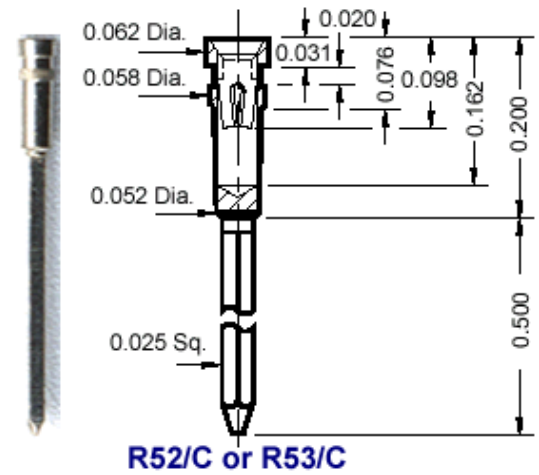

**0.055" Dia. Holes : R50 & R51 Series**

Low profile wire-wrap socket pins

Gold-plated contact surfaces ( 30 micro inch Gold over Nickel )

Tin/Lead finish shell ( 200 micro inch Tin/Lead over Nickel )


2 Level wire wrap on 0.025" square posts

Use P158 Insertion Tool with D10 Die Point.

R52 : Four figure contacts, 2 level wire wrap on 0.025" square posts

R53 : Six figure contacts, 2 level wire wrap on 0.025" square posts

Ordering Table	Part No.	Pkg. Qty.
	R50/C	100
	R50/M	1000
	R51/C	100
	R51/M	1000

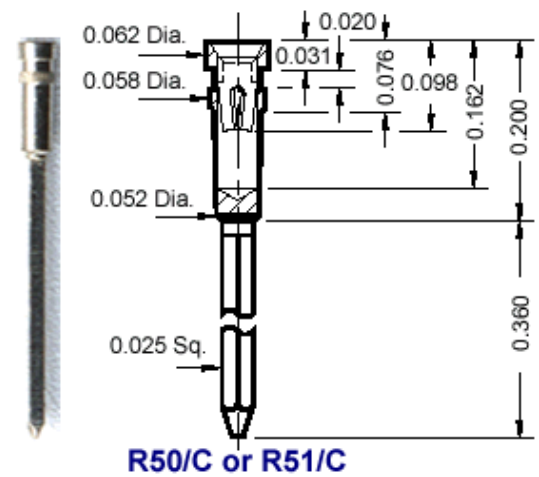

email us your requirements : [inquire@vectorelect.com](mailto:inquire@vectorelect.com)

11115 Vanowen St., North Hollywood, CA 91605, USA

Tel.: ( 818 ) 985 8208, ( 800 ) 423 5659; Fax : ( 818 ) 985 7708

Circbord®, Vectorbord® and VectorPak® are registered trademarks of Vector Electronics & Technology, Inc.  
CompactPCI® is a registered trademark of PCIMG. © 2001 Vector Electronics & Technology, Inc. - All Rights Reserved