



## Dome Top Series

The Dome Top Gaskets are known for their large surface area for electrical contact and smooth wiping action. Also available in a solid top profile allowing for omni-directional wiping. Together with the Slot Mount Series, the Dome Top Gaskets are a mainstay in the enclosure/chassis industries. Commonly mounted with adhesive tape.



DT   Dome Top		Black = inches Red= mm Comp = Compressed																
P/N	A	B	Finger		Pitch	Mat. Thick		Comp Width		Comp Height		Length	Fingers	Tape				
8-45D T-XX-15	0.08	2.03	0.45	11.4	0.100	2.54	0.125	3.18	0.003	0.076	0.05	1.27	0.040	10.2	15	381	150	0.145
8-S-45D T-XX-15	0.08	2.03	0.45	11.4	0.100	2.54	0.125	3.18	0.002	0.050	0.05	1.27	0.040	10.2	15	381	150	0.145
11-35DT-XX-15	0.11	2.79	0.35	8.89	0.170	4.32	0.188	4.78	0.003	0.076	0.38	9.65	0.055	14.0	15	381	80	0.100
11-S-35DT-XX-15	0.11	2.79	0.35	8.89	0.170	4.32	0.188	4.78	0.002	0.050	0.38	9.65	0.055	14.0	15	381	80	0.100
14-45D T-XX-15	0.14	3.56	0.45	11.4	0.228	5.79	0.250	6.35	0.003	0.076	0.51	13.0	0.070	17.8	15	381	60	0.100
14-S-45DT-XX-15	0.14	3.56	0.45	11.4	0.228	5.79	0.250	6.35	0.002	0.050	0.51	13.0	0.070	17.8	15	381	60	0.100
22-62D T-XX-15	0.22	5.59	0.62	15.7	0.345	8.76	0.375	9.53	0.004	0.102	0.76	19.3	0.100	25.4	15	381	40	0.100
22-S-62DT-XX-15	0.22	5.59	0.62	15.7	0.345	8.76	0.375	9.53	0.003	0.076	0.76	19.3	0.100	25.4	15	381	40	0.100



**MOUNTING OPTIONS**  
 ■ Tape

The Dome Top gaskets have fully independent fingers that are adhesive mounted. Their smooth curve provides a large area for electrical contact and smooth wiping action.

XX - Select material/finish (see page 16)

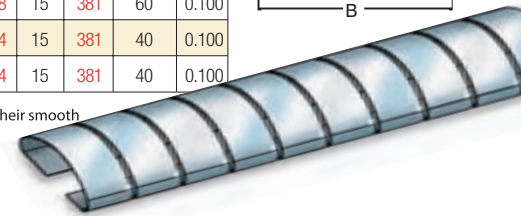

DTS   Dome Top Solid		Black = inches Red= mm Comp = Compressed																
P/N	A	B	Finger		Pitch	Mat. Thick		Comp Width		Comp Height		Length	Fingers	Tape				
11-35DT S-XX-15	0.11	2.79	0.35	8.89	0.170	4.32	0.188	4.78	0.003	0.076	0.38	9.65	0.055	14.0	15	381	80	0.100
11-S-35DTS-XX-15	0.11	2.79	0.35	8.89	0.170	4.32	0.188	4.78	0.002	0.050	0.38	9.65	0.055	14.0	15	381	80	0.100
14-45DT S-XX-15	0.14	3.56	0.45	11.4	0.250	6.35	0.250	6.35	0.003	0.076	0.51	13.0	0.070	17.8	15	381	60	0.100
14-S-45DTS-XX-15	0.14	3.56	0.45	11.4	0.250	6.35	0.250	6.35	0.002	0.050	0.51	13.0	0.070	17.8	15	381	60	0.100
22-62DT S-XX-15	0.22	5.59	0.62	15.7	0.375	9.53	0.375	9.53	0.004	0.102	0.76	19.3	0.100	25.4	15	381	40	0.100
22-S-62DTS-XX-15	0.22	5.59	0.62	15.7	0.375	9.53	0.375	9.53	0.003	0.076	0.76	19.3	0.100	25.4	15	381	40	0.100



**MOUNTING OPTIONS**  
 ■ Tape

The Dome Top "Solid" Series gaskets have a strip that connects each finger along the top. This allows for unique angular wiping action without snagging. Other features are the same as the Dome Top Series

XX - Select material/finish (see page 16)

