



CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

[Home](#)

[About CML](#)

[Service](#)

[Media Center](#)


[Contact](#)

[Access CML](#)

Products


Aviation Incandescent Lamps

CML incandescent lamps offer high performance. Primary advantages include their bright white light output and their relatively low cost.




Part Number: CM84
Serial Number: T-1 WB
Type: T-1 3/4
Base: Wedge
Volts (V): 6.3
AMP +/- 10%: 0.04
MSCP nom.: .02
Avg life: 20000
Special Features:
Military Reference:
RoHS Status: Yes

T-1 3/4 Wedge Base

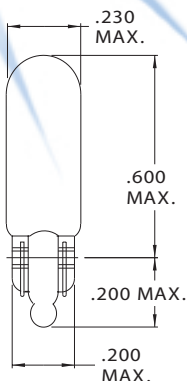

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM11 | 2.5 | .200 | .200 | 1,000 | C-2R |
| CM111 | 2.7 | .100 | .230 | 5 | S-2 |
| CM56 | 5.0 | .115 | .150 | 20,000 | C-2R |
| CM79 | 6.0 | .200 | .600 | 1,000 | C-2R |
| CM16 | 6.3 | .150 | .340 | 5,000 | C-2F |
| CM84 | 6.3 | .040 | .030 | 20,000 | C-2R |
| CM86 | 6.3 | .200 | .400 | 20,000 | C-2F |
| CM18 | 14.0 | .040 | .130 | 5,000 | C-2F |
| CM37 | 14.0 | .090 | .500 | 1,500 | C-2F |
| CM70 | 14.0 | .150 | 1.50 | 100 | C-2F |
| CM73 | 14.0 | .080 | .300 | 15,000 | C-2F |
| CM74 | 14.0 | .100 | .700 | 500 | C-2F |
| CM17 | 28.0 | .065 | .650 | 5,000 | C-2F |
| CM85 | 28.0 | .040 | .300 | 7,000 | C-2F |

T-1 3/4 Midget Screw Base

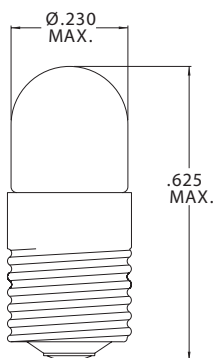

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM8669 | 1.35 | .060 | .010 | 500 | C-6 |
| CM1767 | 2.50 | .200 | .200 | 500 | C-2R |
| CM1769 | 2.50 | .200 | .200 | 500 | C-2R |
| CM8693 | 2.70 | .060 | .040 | 6,000 | C-2R |
| CM3153 | 5.00 | .060 | .150 | 5,000 | C-2R |
| CM342 | 6.00 | .040 | .030 | 10,000 | C-2V |
| CM1768 | 6.00 | .200 | .600 | 1,000 | C-2R |
| CM7323 | 6.00 | .200 | .550 | 5,000 | C-2R |
| CM378 | 6.30 | .200 | .400 | 20,000 | C-2F |
| CM1775 | 6.30 | .075 | .230 | 1,000 | C-2R |
| CM389 | 10.0 | .040 | .080 | 5,000 | C-2F |
| CM373 | 14.0 | .080 | .500 | 1,500 | C-2F |
| CM383 | 14.0 | .080 | .500 | 750 | C-2F |
| CM8162 | 14.0 | .100 | .500 | 10,000 | C-2F |
| CM8362 | 14.0 | .080 | .300 | 15,000 | C-2F |
| CM8536 | 18.0 | .040 | .150 | 10,000 | C-2F |
| CM335 | 28.0 | .040 | .340 | 4,000 | C-2F |
| CM335LSV | 28.0 | .060 | .340 | 25,000 | C-2F |
| CM369 | 28.0 | .040 | .340 | 4,000 | C-2F |
| CM399 | 28.0 | .040 | .300 | 7,000 | C-2F |
| CM8369 | 28.0 | .065 | .650 | 15,000 | C-2F |
| CM8384 | 28.0 | .040 | .150 | 10,000 | C-2F |