

Micro Commercial Components Corp.

Complete Discrete Semiconductor Solutions

Part Number	MB156	
product family	BRIDGE RECTIFIERS	
package type	MB-35	
VRM(PRV)	600V	
lfsm	300A	
IF(AV)	15A	
@Vf	1.1V	
@If	7.5A	
Trr		
IR	5.0µA	
@VR	600V	
Package Qty	Bulk: 50pcs/Box, 400Pcs/Ctn.	



MB1505 THRU MB1510

Features

- Mounting Hole For #10 Screw
- High Conductivity Metal Case
- Any Mounting Position
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

Operating Temperature: -55°C to +150°C
 Storage Temperature: -55°C to +150°C

• UL Recognized File # E165989


MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse	Maximum RMS Voltage	Maximum DC Blocking
145.4505	1151505	Voltage	05) (Voltage
MB1505	MB1505	50V	35V	50V
MB151	MB151	100V	70V	100V
MB152	MB152	200V	140V	200V
MB154	MB154	400V	280V	400V
MB156	MB156	600V	420V	600V
MB158	MB158	800V	560V	800V
MB1510	MB1510	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I _{F(AV)}	15.0A	$T_C = 55^{\circ}C$
Peak Forward Surge Current	I _{FSM}	300A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V _F	1.2V	I _{FM} = 7.5A per element; T _J = 25°C
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	10μA 1mA	T _J = 25°C T _J = 125°C

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7

15 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

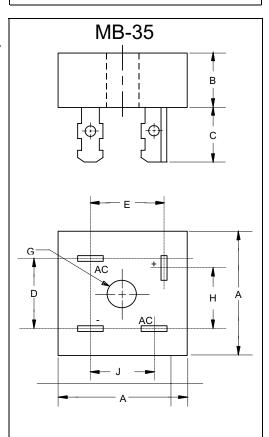

DIMENSIONS					
	INCHES				NOTE
DIM	MIN	MAX	MIN	MAX	NOTE
Α	1.115	1.135	28.33	28.83	
В	.427	.447	10.85	11.35	
С	.428	.468	10.87	11.89	
D	.688	.730	17.48	18.50	
E	.618	.658	15.70	16.71	
G	.200		5.08		Ø
Н	.618	.658	15.70	16.71	
J	.530	.570	13.46	14.48	



Ordering Information

Device	Packing
(Part Number)-BP	Bulk;50pcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.