
87224-2 Product Details

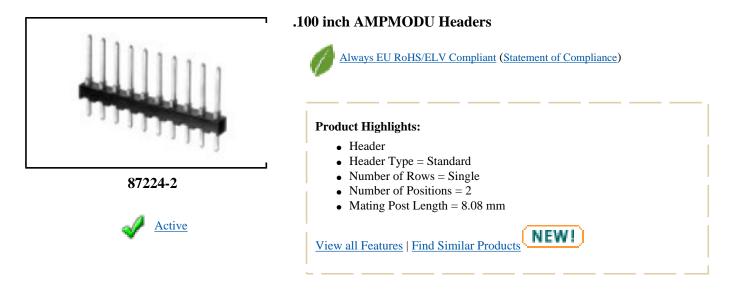

Documentation & Additional Information

Product Drawings:

• HEADER ASS'Y, MOD II, .025 SQ. POST, SINGLE ROW, 100... (PDF, English)

Catalog Pages/Data Sheets:

• AMPMODU INTERCONNECTION SYSTEM (PDF, English)

Product Specifications:

• None Available

Application Specifications:

• None Available

Instruction Sheets:

None Available

CAD Files:

• None Available

Additional Information:

• Product Line Information

Related Products:

• <u>Tooling</u>

List all Documents

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- <u>Product Type</u> = Header
- <u>Number of Positions</u> = 2
- <u>Mount Angle</u> = Vertical
- <u>PCB Retention Feature</u> = No
- <u>Surface Mount Compatible</u> = No
- <u>Board Standoff</u> = Without
- <u>Mounting Ears</u> = Without
- <u>Mating Connector Lock</u> = Without
- Post Size (mm [in]) = 0.64 [.025]

Mechanical Attachment:

- Mating Post Length (mm [in]) = 8.08 [0.318]
- <u>Panel Attachment</u> = Without

Termination Related Features:

- <u>Termination (Solder) Post Length (mm [in])</u> = 3.18 [0.125]
- Solder Tail Contact Plating = Gold Flash over Nickel

Body Related Features:

- Header Type = Standard
- <u>Number of Rows</u> = Single
- <u>Centerline, Matrix (mm [in])</u> = 2.54 [.100]
- <u>Selectively Loaded</u> = No
- <u>Mount Type</u> = PC Board

Contact Related Features:

- <u>Contact Mating Area Plating</u> = Gold (15)
- Contact Shape = Square
- Contact Material = Copper Alloy

Housing Related Features:

- Housing Material = Thermoplastic
- Housing Flammability Rating = UL 94V-0

Industry Standards:

- <u>RoHS/ELV Compliance</u> = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Wave solder capable to 240°C

• RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

• <u>High Temperature Housing</u> = No

Operation/Application:

• <u>High Speed Serial Data Connector</u> = No

Other:

• Brand = AMP