

- [Find Authorized Distributors](#)

## My Account


- [Sign In](#)
- [Register](#)

## Customer Support

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors](#) > [Product Feature Selector](#) > Product Details

# 102241-4 Product Details

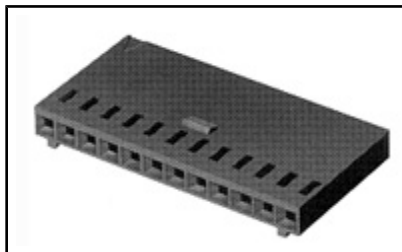

102241-4



[Active](#)

### .100 AMPMODU Headers, Housings & Contacts



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Housing
- Not Preloaded
- Number of Positions = 6
- Housing Type = Receptacle
- Number of Rows = Single

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [CONN HOUSING, CRIMP SNAP-IN MOD IV, SINGLE ROW,.100 ...](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- [Interconnection System, AMPMODU Mod IV 1/2](#) (PDF, English)

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files: [\(CAD Format & Compression Information\)](#)

- [2D Drawing](#) (DXF, Version N1)
- [3D Model](#) (IGES, Version N1)
- [3D Model](#) (STEP, Version N1)

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- Product Type = Housing
- [Number of Positions](#) = 6
- [Mating Connector Lock](#) = With
- [Strain Relief](#) = Without
- [Mating Polarization](#) = With
- [Mating Polarization Method](#) = Latched
- [Keyed](#) = No
- [Connector Series](#) = Mod IV
- Wire Termination Type = Crimp
- Flame Retardant = Yes
- Mating Connector Lock Type = Detent Latching
- Housing Configuration = Both Ends Closed

### Mechanical Attachment:

- Preloaded = No
- AMP Logo = With

### Electrical Characteristics:

- Voltage Rating (VAC) = 250
- Contact Current Rating (Amps.) = 3
- Termination Resistance (m $\Omega$ ) = 12
- Insulation Resistance (M $\Omega$ ) = 5,000
- Dielectric Withstanding Voltage (V) = 750

### Body Related Features:

- [Housing Type](#) = Receptacle
- [Number of Rows](#) = Single
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 [.100]

### Contact Related Features:

- Approved Standards = UL E28476, CSA LR7189

### Housing Related Features:

- [Housing Color](#) = Black
- Housing Material = Nylon

### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

### Conditions for Usage:

- Operating Temperature (°C) = -65 – +105

### Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved

