

## Non-Fusible Disconnect Switches

For a complete assembly, please select one of each:

- 1 switch
- 1 handle
- 1 shaft
- 1 terminal lug kit



### 400 – 800 Amp switches, 600V

UL general purpose amp rating	IEC AC21 amp rating	Maximum horsepower rating					Catalog number
		200V	208V	240V	480V	600V	
2 pole 400 600 800	630	—	—	—	—	—	BDNF4002
	800	—	—	—	—	—	BDNF600A2
	1250	—	—	—	—	—	BDNF800A2
3 pole 400 600 800	630	100	100	125	250	350	BDNF400
	800	150	150	200	400	500	BDNF600A
	1250	200	200	250	500	600	BDNF800A
4 pole 400 600	630	100	100	125	250	350	BDNF4004
	800	150	150	200	400	500	BDNF600A4
	1250	200	200	250	500	600	BDNF800A4

### Pistol handles — for use with shafts □ .47 x .47" (□ 12 x 12 mm)

NEMA type	IEC type	Color	Length in/in/mm	Marking	Detachable	Paddleable	Weight (lbs)	Catalog number
1.3R-12	IP65	Blk	4.9/125	O/I & O/I/On	Yes	Yes	0.39	BDH112
1.3R-12	R/Y	4.9/125	O/I & O/I/On	Yes	Yes	0.39	BDH113	
1.3R-12	IP65	Blk	5.7/145	O/I & O/I/On	Yes	Yes	0.39	BDH114
1.3R-12	R/Y	5.7/145	O/I & O/I/On	Yes	Yes	0.39	BDH115	
1.3R-12	IP65	Blk	6.9/175	O/I & O/I/On	Yes	Yes	0.41	BDH116
1.3R-12	R/Y	6.9/175	O/I & O/I/On	Yes	Yes	0.41	BDH117	
1.3R-4.4X-12	IP66	Blk	5.7/145	O/I & O/I/On	Yes	Yes	0.39	GDHXB12
1.3R-4.4X-12	R/Y	5.7/145	O/I & O/I/On	Yes	Yes	0.39	GDHXY12	
1.3R-4.4X-12	IP66	Blk	6.9/175	O/I & O/I/On	Yes	Yes	0.41	CDHXB22
1.3R-4.4X-12	R/Y	6.9/175	O/I & O/I/On	Yes	Yes	0.41	CDHXY22	
1.3R-4.4X-12	IP65	Metal	8.7/220	O/I/On	—	Yes	1.50	BDH8


### Shafts — for use with pistol handles □ .47 x .47" (□ 12 x 12 mm)

Shaft length inches/mm	Mounting depth <sup>①</sup> in inches	Weight (lbs)	Catalog number
11.0/280	10.2 – 14.5	0.77	BDS280
12.8/325	12.0 – 16.3	0.90	BDS325
15.6/395	14.8 – 19.1	1.10	BDS395
18.3/465	17.5 – 21.9	1.32	BDS465
21.1/535	20.3 – 24.6	1.54	BDS535

### Twisted shafts — Rotates handle 45° □ .47 x .47" (□ 12 x 12 mm)

Shaft length inches/mm	Mounting depth <sup>①</sup> in inches	Weight (lbs)	Catalog number
11.0/280	10.2 – 14.5	0.77	BDS28045
12.8/325	12.0 – 16.3	0.90	BDS32545
18.3/465	17.5 – 21.9	1.32	BDS46545

<sup>①</sup> Mounting depth is the distance from the outside of the door to the disconnect switch mounting plate. Shaft can be cut to desired length.

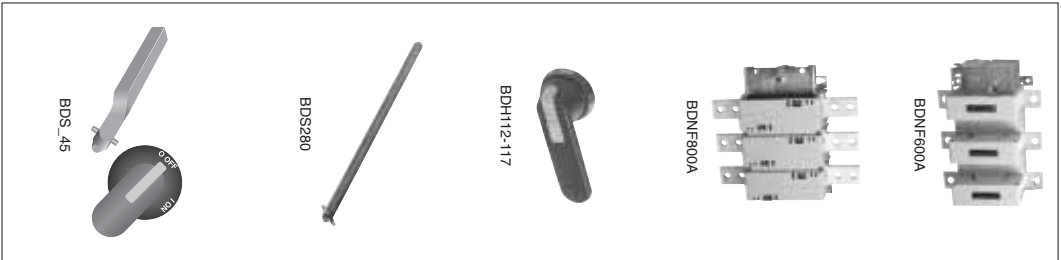

For complete specification data, call Bussmann Information Fax ~ 636.527.1450

For additional information and detail, see the Bussmann Disconnect Switch Catalog, Item Number 3006