




TOP VIEW

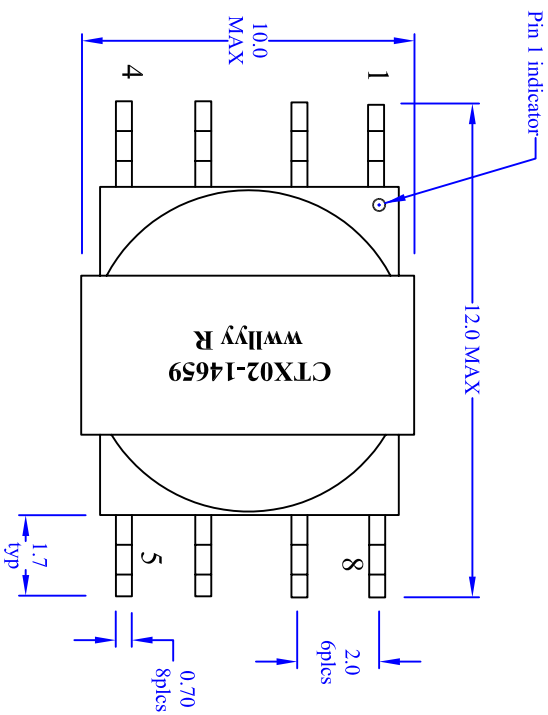

FRONT VIEW

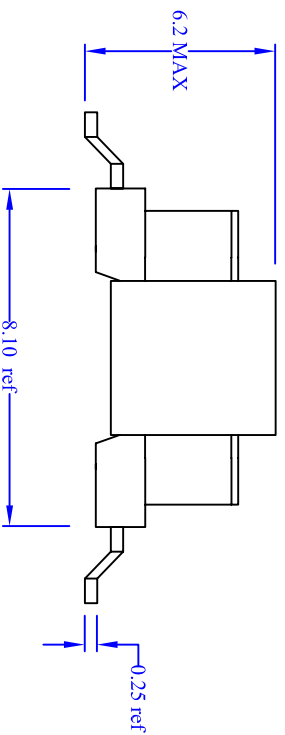


RECOMMENDED PCB LAYOUT

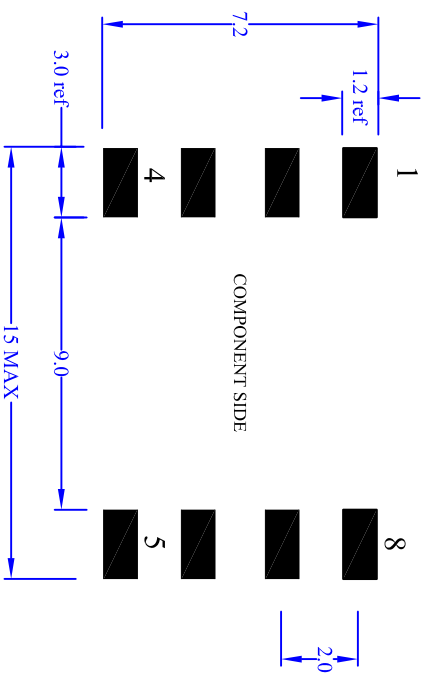

ELECTRICAL CHARACTERISTICS

OCL @ 100kHz, 0.250Vrms, 0 Adc. Pins (1 - 4); 382 - 711 μ H
 DCR @ 20°C pins (1-4). 0.620 W max
 DCR @ 20°C pins (5-8). 2.50 W max
 Turns Ratio: pins (1-4):(5-6):(6-8). 1.0 : 1.375 : 1.375 +/- 3%.
 Hipot @ 500Vdc for 1 second; (5-core)
 Hipot @ 1250 Vac for 1 second; 1 to 5 & core.

SCHEMATIC

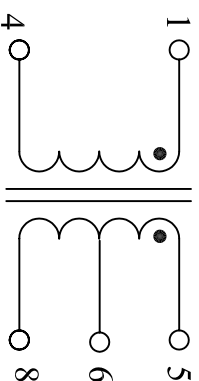

Notes:

- 1) All Dimensions are in millimeters unless otherwise specified.
- 2) Tolerances are .xx +/- .10, .xxx +/- .05 unless stated otherwise.
- 3) All soldering surfaces to be coplanar within 0.178 mm (0.007").
- 4) willyy = (Date Code) R= (Revision Level)
- 5) PCB tolerances are +/- 0.1 unless stated otherwise.

COOPER ELECTRONIC TECHNOLOGIES

3601 Quantum Blvd, Boynton Beach, FL 33426

Transformer, Push-Pull

300kHz, 547 μ H

ER 9.5, SMT, gull wing, 8 pads

Size Drawing Number: CTX02-14659

A Revision Level: H Sheet Number: 3 of 5