

Product Detail



Product Line:	Johnson (Click for customer service)
Part Number:	105-2202-201
Description:	Horizontal Test Jack - Insulated: Formed Contact
Product Family:	TEST JACK
Breakdown Voltage:	3500 Vrms min.
Color / Finish:	Red
Contact Material:	Beryllium copper
Contact Finish:	Silver
Contact Termination:	Solder
Current:	5 amps
Desc 2:	Horizontal
Description:	Insulated Formed Contact
For Use With:	.080 (2.00) Tip Plug
Body Material:	Nylon 6/6 per ASTM D4066
RoHS Compliant:	Yes

20070523-1523

Vertical Test Jack

Insulated: Formed Contact

SPECIFICATIONS:

Contact: Beryllium copper per QQ-C-533

Finish: Gold or Silver

Body: Nylon 6/6 per ASTM D4066

RATINGS



Current: 5 amps

Breakdown Voltage: 3500 Vrms minimum†

Contact Resistance: Gold: 0.005 ohms maximum
Silver: 0.010 ohms maximum

Adjacent Jack C: 1 pF maximum at 1 MHz

SILVER PLATING	
105-2202-201	Red

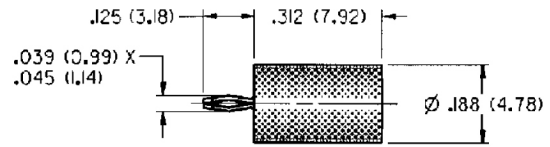

MOUNTING HOLE LAYOUT

For Standard Tip Plug: .080 (2.00) Diameter

FEATURES:

- Spring loaded lead to hold in board
- Contact protected from flux and solder
- Nylon UL approved for self extinguishing