




Copyright FCI

form: A3

1 2 3 4 5 6

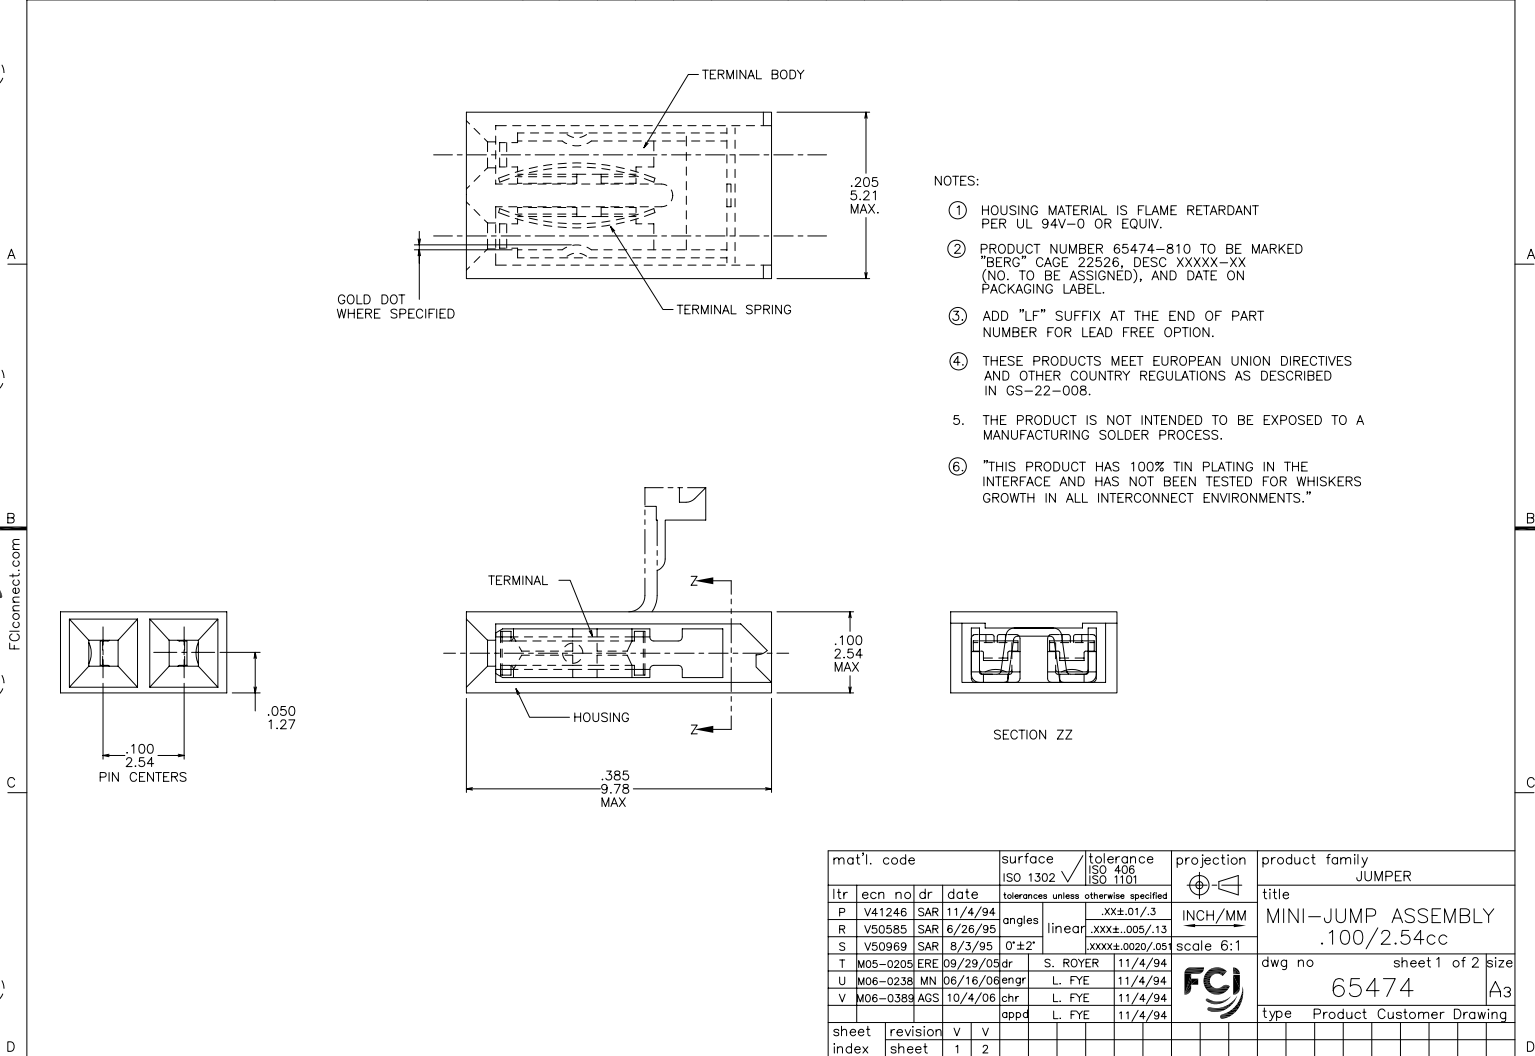

- NOTES:
- HOUSING MATERIAL IS FLAME RETARDANT PER UL 94V-0 OR EQUIV.
 - PRODUCT NUMBER 65474-810 TO BE MARKED "BERG" CAGE 22526, DESC XXXX-XX (NO. TO BE ASSIGNED), AND DATE ON PACKAGING LABEL.
 - ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
 - THESE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
 - "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKERS GROWTH IN ALL INTERCONNECT ENVIRONMENTS."

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406	ISO 1101	JUMPER
ltr	ecn	no	dr	date	tolerances unless otherwise specified
P	V41246	SAR	11/4/94		angles linear .xxx.01/3
R	V50585	SAR	6/26/95		linear .xxx±.005/.13
S	V50969	SAR	8/3/95		0±2' .xxxx±.0020/.051
T	M05-0205	ERE	09/29/05	dr	S. ROYER 11/4/94
U	M06-0238	MN	06/16/06	engr	L. FYE 11/4/94
V	M06-0388	AGS	10/4/06	chr	L. FYE 11/4/94
				appd	L. FYE 11/4/94
sheet index	revision sheet	v	v		
		1	2		

title	MINI-JUMP ASSEMBLY
dwg no	65474
sheet 1 of 2 size	A3
type	Product Customer Drawing

PDM: Rev:V STATUS:Released Printed: Apr 23, 2011

PRODUCT NUMBER NOTE 3	HOUSING COLOR	TERMINAL BODY		TERMINAL SPRING		HOUSING MATERIAL
		MATERIAL	PLATING	MATERIAL	PLATING	
65474-001	BLUE	.010/.25 THICK 1/4 HD BRASS ALLOY UNS C26000	STRIPE, 40u"/1.02u Au at CONTACT REMAINDER FLASH Au 50u"/1.27u Ni	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	P-Ni/M-050 P-Au/M-003	PLAIN POLYESTER NOTE 1
-002	BLUE	.010/.25 THICK 1/4 HD BRASS ALLOY UNS C26000	SN PLATED	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	TIN PLATED	PLAIN POLYESTER NOTE 1
-003	DISCONTINUED					
-004	BLUE	.010/.25 THICK 1/4 HD CuNi ALLOY UNS C72500	.001/.03 MIN THICK GOLD DOT	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	P-Ni/M-050 P-Au/M-003	PLAIN POLYESTER NOTE 1
-005	BLACK	.010/.25 THICK 1/4 HD CuNi ALLOY UNS C72500	.001/.03 MIN THICK GOLD DOT	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	P-Ni/M-050 P-Au/M-003	PLAIN NORYL NOTE 1
-006	BLACK	.010/.25 THICK 1/4 HD BRASS ALLOY UNS C26000	STRIPE, 40u"/1.02u Au at CONTACT REMAINDER FLASH Au 50u"/1.27u Ni	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	P-Ni/M-050 P-Au/M-003	PLAIN NORYL NOTE 1
-007	SAME AS -004 EXCEPT PACKAGING-RESTRICTED					
-008	SAME AS -004 EXCEPT PACKAGING-RESTRICTED					
-009	BLUE	.010/.25 THICK 1/4 HD BRASS ALLOY UNS C26000	STRIPE, 40u"/1.02u Au at CONTACT REMAINDER FLASH Au 50u"/1.27u Ni	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	30u"/.76u Au	PLAIN NORYL NOTE 1-RESTRICTED
-010	BLUE	.010/.25 THICK 1/4 HD BRASS ALLOY UNS C26000	STRIPE, 30u"/0.76u Au at CONTACT REMAINDER FLASH Au 50u"/1.27u Ni	.0048/.122 THICK BE-CU ALLOY UNS C17200 HEAT TREATED	P-Ni/M-050 P-Au/M-003	PLAIN POLYESTER NOTE 1
65474-810	SAME AS -010 EXCEPT ADD SPECIAL MIL MARKING PER NOTE 2					

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family JUMPER
ltr	ecn	no	dr	date
v				
tolerances unless otherwise specified			title	
angles	linear	.XXX.01/3	MINI-JUMP ASSEMBLY	
0'±2'		.XXX±.005/.13	.100/2.54cc	
		.XXX±.0020/.051	scale 6:1	
dr	S. ROYER	11/4/94	sheet 2 of 2 size	
enrg	L. FYE	11/4/94	65474 A3	
chr	L. FYE	11/4/94	type Product Customer Drawing	
appd	L. FYE	11/4/94		
sheet index	revision sheet			

PDM: Rev:V STATUS:Released Printed: Apr 23, 2011