



PIT 2,5-QUATTRO-MT

Order No.: 3210172

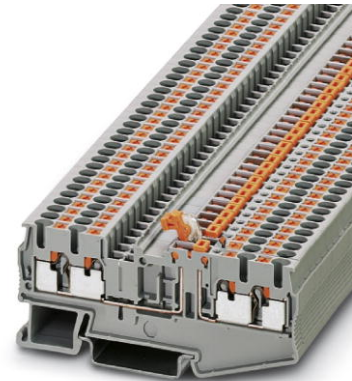


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3210172>

Disconnect and test disconnect terminal block, Connection type: Push-in connection, Cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, Nominal current: 20 A, Nominal voltage: 400 V, Length: 84 mm, Width: 5.2 mm, Color: gray, Assembly: NS 35/7.5, NS 35/15

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  |
| sales group | A640 |
| Pack | 50 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 113 (CL1-2011) |

Product notes

WEEE/RoHS-compliant since: 12/07/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|-----------------------|--|
| General | |
| Note | The max. load current must not be exceeded by the total current of all connected conductors. |
| Number of levels | 1 |
| Number of connections | 4 |

| | |
|------------------------------------|------|
| Color | gray |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |

Dimensions

| | |
|------------------|---------|
| Width | 5.2 mm |
| Length | 84 mm |
| Height NS 35/7.5 | 36.5 mm |
| Height NS 35/15 | 44 mm |

Technical data

| | |
|----------------------------------|---------------|
| Rated surge voltage | 6 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I_N | 20 A |
| Nominal voltage U_N | 400 V |
| Open side panel | ja |

Connection data

| | |
|---|----------------------|
| Conductor cross section solid min. | 0.14 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.14 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 26 |
| Conductor cross section AWG/kcmil max | 12 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.14 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 2.5 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.14 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 2.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm ² |
| Connection method | Push-in connection |
| Stripping length | 10 mm |

| | |
|---------------------------|----|
| Internal cylindrical gage | A3 |
|---------------------------|----|

Certificates / Approvals



Certification ABS, CUL, GL, GOST, LR, NK, UL

Accessories

| Item | Designation | Description |
|-----------------|------------------------------|--|
| Assembly | | |
| 3030815 | ATP-ST QUATTRO | Partition plate, Length: 90.9 mm, Width: 2 mm, Height: 45 mm, Color: gray |
| 3022276 | CLIPFIX 35-5 | Snap-on end bracket, for NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 5 and ZBF 5, terminal strip marker KLM 2 and KLM, parking facility for FBS...5, FBS...6, KSS 5, KSS 6, width: 5,15 mm, color: gray |
| 3038590 | D-ST 2,5-QUATTRO-MT | End cover, Length: 84 mm, Width: 2.2 mm, Height: 36.5 mm, Color: gray |
| 3036602 | DS-ST 2,5 | Cover segment, Length: 72 mm, Height: 36.5 mm, Color: gray |
| 0801704 | NS 35/ 7,5 AL UNPERF 2000MM | DIN rail, material: Aluminum, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 0801762 | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1207640 | NS 35/ 7,5 PERF 755MM | NS 35 DIN rail, height 7.5 mm, length 755 mm |
| 1207653 | NS 35/ 7,5 PERF 955MM | NS35 DIN rail, height 7.5 mm, length 955 mm |
| 1207666 | NS 35/ 7,5 PERF 1155MM | NS 35 DIN rail, height 7.5 mm, length 1155 mm |
| 0801733 | NS 35/ 7,5 PERF 2000MM | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1208131 | NS 35/ 7,5 PERF/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 0801681 | NS 35/ 7,5 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1208115 | NS 35/ 7,5 UNPERF/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 1208128 | NS 35/ 7,5 UNPERF/SO/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 0801377 | NS 35/ 7,5 V2A UNPERF 2000MM | DIN rail, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver |

| | | |
|---------|-----------------------------|--|
| 1206421 | NS 35/ 7,5 ZN PERF 2000MM | DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1206434 | NS 35/ 7,5 ZN UNPERF 2000MM | DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1201895 | NS 35/15 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m |
| 1201730 | NS 35/15 PERF 2000MM | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m |
| 1201714 | NS 35/15 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m |
| 1208144 | NS 35/15 UNPERF/... | DIN rail, Width: 35 mm, Height: 15 mm, Color: silver |
| 1208157 | NS 35/15 UNPERF/SO/... | DIN rail, Width: 35 mm, Height: 15 mm, Color: silver |
| 1206586 | NS 35/15 ZN UNPERF 2000MM | DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m |

Bridges

| | | |
|---------|-------------------|---|
| 3030161 | FBS 2-5 | Plug-in bridge, Number of positions: 2, Color: red |
| 3030174 | FBS 3-5 | Plug-in bridge, Number of positions: 3, Color: red |
| 3030187 | FBS 4-5 | Plug-in bridge, Number of positions: 4, Color: red |
| 3030190 | FBS 5-5 | Plug-in bridge, Number of positions: 5, Color: red |
| 3030213 | FBS 10-5 | Plug-in bridge, Number of positions: 10, Color: red |
| 3030226 | FBS 20-5 | Plug-in bridge, Number of positions: 20, Color: red |
| 3038930 | FBS 50-5 | Plug-in bridge, Number of positions: 50, Color: red |
| 3038943 | RB ST (2,5/4)-1,5 | Reducing bridge, Number of positions: 2, Color: red |

General

| | | |
|---------|------|---|
| 3247954 | S-MT | Switching lock, Length: 10.5 mm, Width: 3.5 mm, Height: 23.1 mm, Color: white |
|---------|------|---|

Marking

| | | |
|---------|-------------|--|
| 0810588 | GBS 5-25X12 | Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5 |
| 0809298 | GBS-ZB/26X6 | Group marking label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with ESL 26x6 mm or EST 25x6 mm, in the foot part with Zack marker strip, length: 29 mm |
| 3037643 | STP 5-2-ZB | Double marker carrier, snaps onto the spring-cage terminal blocks ST 2.5..., labeled with ZB 5 or ZBF 5 |
| 0818108 | UC-TM 5 | UniCard materials for labeling terminal blocks with a marker groove, 96-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |

| | | |
|---------|------------------|--|
| 0824581 | UC-TM 5 CUS | UniCard sheets, for labeling terminal blocks with a zack marker strip groove, can be printed as per customer requirements |
| 0818153 | UC-TMF 5 | UniCard materials for labeling terminal blocks using a flat marker groove, 96-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |
| 0824638 | UC-TMF 5 CUS | UniCard sheets, for labeling terminal blocks with a flat zack marker sheet groove, can be printed as per customer requirements |
| 0828734 | UCT-TM 5 | UniCard materials for thermal transfer printer, for labeling terminal blocks with a marker groove, 72-section, can be labeled with THERMOMARK CARD and BLUEMARK LED, color: white |
| 0829595 | UCT-TM 5 CUS | Terminal block marking, can be labeled as per customer specifications |
| 0828744 | UCT-TMF 5 | UniCard materials for thermal transfer printer, for labeling terminal blocks with a horizontal marker groove, 72-section, can be labeled with THERMOMARK CARD and BLUEMARK LED, color: white |
| 0829658 | UCT-TMF 5 CUS | Terminal block marking, can be labeled as per customer specifications |
| 1050004 | ZB 5 :UNBEDRUCKT | Zack strip, unprinted, 10-section, for individual labeling with M-PEN, ZB-T or CMS system, pack is sufficient for 100 terminal blocks, for a terminal width of 5.2 mm, color: White |
| 1050295 | ZB 5:SO/CMS | Zack strip, 10-section, divisible, special printing, marking according to customer requirements |

Plug/Adapter

| | | |
|---------|-------------|--------------------------------------|
| 3036725 | DP PS-5 | Spacer plate, Color: red |
| 3002843 | ISH 2,5/0,2 | Insulation stop sleeve, Color: white |
| 3002856 | ISH 2,5/0,5 | Insulation stop sleeve, Color: gray |
| 3002869 | ISH 2,5/1,0 | Insulation stop sleeve, Color: black |
| 0201731 | MPS-IH BK | Insulating sleeve, Color: black |
| 0201689 | MPS-IH BU | Insulating sleeve, Color: blue |
| 0201702 | MPS-IH GN | Insulating sleeve, Color: green |
| 0201728 | MPS-IH GY | Insulating sleeve, Color: gray |
| 0201676 | MPS-IH RD | Insulating sleeve, Color: red |
| 0201715 | MPS-IH VT | Insulating sleeve, Color: violet |
| 0201663 | MPS-IH WH | Insulating sleeve, Color: white |
| 0201692 | MPS-IH YE | Insulating sleeve, Color: yellow |
| 0201744 | MPS-MT | Test plugs |
| 3032871 | PAI-4-N GY | Test adapter, Color: gray |
| 3030983 | PS-5 | Test adapter, Color: red |

Tools

| | | |
|---------|---------------|---|
| 1204517 | SZF 1-0,6X3,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|---------------|---|

Diagrams/Drawings

Circuit diagram



Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;