
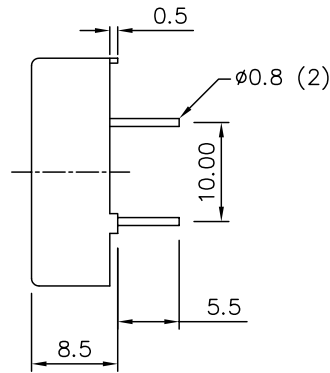


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.08	W
MAX INPUT POWER	0.15	W
IMPEDANCE	8±20%	OHM
OUTPUT SPL @ 1W/0.5M (AT 0.8, 1.0, 1.2, 1.5 kHz)	75±3	dB
DISTORTION	7%	-
RESONANT FREQUENCY	1,500	Hz
FREQUENCY RANGE	600 ~ 20,000	Hz
HOUSING MATERIAL	NORYL	-
CONE MATERIAL	MYLAR	-
MAGNET MATERIAL	Nd-Fe-B	-
OPERATING TEMPERATURE	-20 ~ +60	°C
WEIGHT	3.2	grams


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	10/29/01	
A	REVISED TO NEW TEMPLATE	4/26/04	R.W.
B	ADDED WASH TAB	5/4/06	B.R.

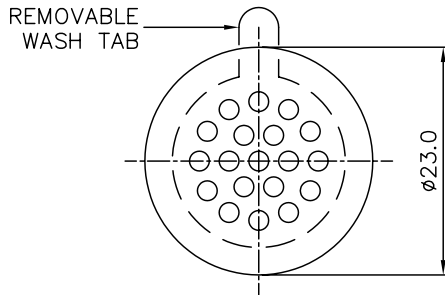

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AT-2308_8_OHM.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.		 projects® unlimited Dayton, Ohio							
<table border="1"> <thead> <tr> <th>APPROVALS</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>DRAWN <i>RABL</i></td> <td>10/01</td> </tr> <tr> <td>APPROVED <i>S.J.</i></td> <td>6/02</td> </tr> </tbody> </table>		APPROVALS	DATE	DRAWN <i>RABL</i>	10/01	APPROVED <i>S.J.</i>	6/02	SPEAKER TRANSDUCER AT-2308 8 OHM	
APPROVALS	DATE								
DRAWN <i>RABL</i>	10/01								
APPROVED <i>S.J.</i>	6/02								
<table border="1"> <tr> <td>SIZE A</td> <td>DRAWING NO. AT-2308 8 OHM</td> </tr> </table>		SIZE A	DRAWING NO. AT-2308 8 OHM						
SIZE A	DRAWING NO. AT-2308 8 OHM								
DO NOT SCALE DRAWING		SCALE: N.T.S.	SHEET 1 OF 1						