





Current Batteries

Datasheet	Picture	Size	Voltage (nom.)	ANSI	IEC	Diam. (mm)	Weight (g)	Height (mm)	Length (mm)	Width (mm)
EN529		Lantern	6	908AC	4LR25X	N/A	665	115	68.2	68.2
EN529_CAN		Lantern	6	908AC	4LR25X	N/A	885	115	68.2	68.2

© 2000- 2008 Energizer Energizer, Energizer Bunny design and other marks are trademarks of Energizer.


ENERGIZER EN529

USA Construction

6V



Industry Standard Dimensions

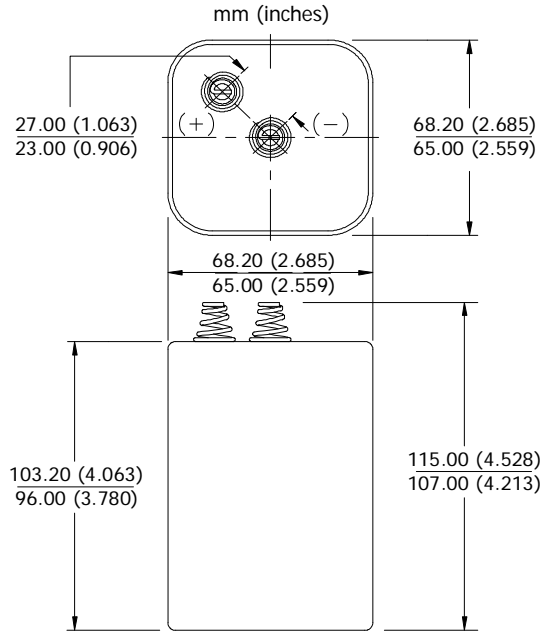

This battery shall pass freely through a cylindrical tube 82.6 diameter x 101.6 long.


Specifications

NOT INTENDED FOR RETAIL TRADE

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-908A
Nominal Voltage:	6.0 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	665 grams (23.5 oz.)
Typical Volume:	440.4 cubic centimeters (26.9 cubic inch)
Jacket:	Metal
Cells:	Four 3-350 in series
Terminal:	Coil Spring


Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

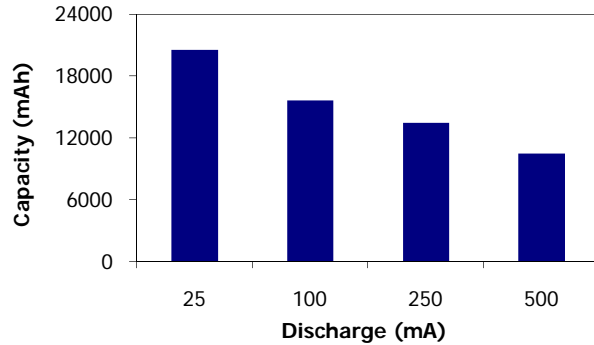


Constant Resistance Performance

Typical Characteristics (21°C)

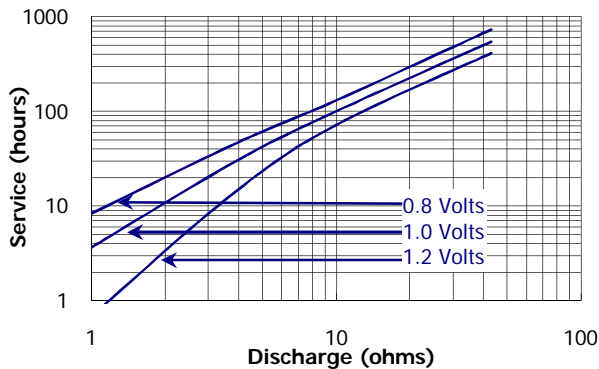

Constant Current Performance

Typical Characteristics (21°C)

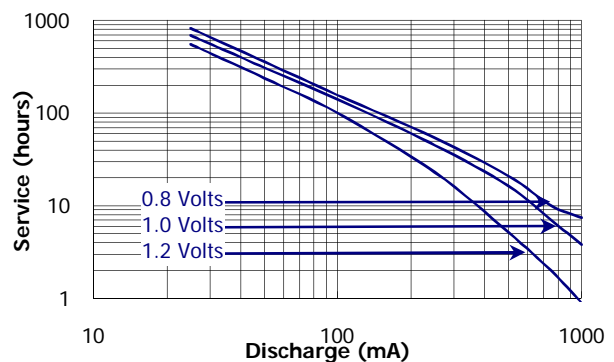

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.