

3 Watts

JCB Series



- 2:1 Input Range
- Operating Temperature -40 °C to +100 °C
- Single & Dual Outputs
- 1500 VDC Isolation
- Optional Isolation to 3000 VDC
- Optional Metal Case
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 5 V (4.5-9 VDC) • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Filter	<ul style="list-style-type: none"> • LC network
Input Reflected Ripple	<ul style="list-style-type: none"> • 35 mA pk-pk through 12 µH inductor, 5 Hz to 20 MHz
Input Surge	<ul style="list-style-type: none"> • 5 V models 15 VDC for 100 ms • 12 V models 24 VDC for 100 ms • 24 V models 40 VDC for 100 ms • 48 V models 80 VDC for 100 ms

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Minimum Load	<ul style="list-style-type: none"> • Minimum load required, see note 1
Initial Set Accuracy	<ul style="list-style-type: none"> • ±1% max
Start Up Delay	<ul style="list-style-type: none"> • 20 ms typical
Start Up Rise Time	<ul style="list-style-type: none"> • 10 ms typical
Line Regulation	<ul style="list-style-type: none"> • ±0.5% max
Load Regulation	<ul style="list-style-type: none"> • ±0.5% max
Cross Regulation	<ul style="list-style-type: none"> • ±5% on dual output models, see note 2
Transient Response	<ul style="list-style-type: none"> • <3% deviation, recovery to within 1% in 2 ms for a 50% load change
Ripple & Noise	<ul style="list-style-type: none"> • 60 mV pk-pk max, 20 MHz bandwidth
Short Circuit Protection	<ul style="list-style-type: none"> • Continuous, (output turns off), with auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none"> • See tables
Temperature Coefficient	<ul style="list-style-type: none"> • ±0.02/°C max

General

Efficiency	<ul style="list-style-type: none"> • See tables
Isolation	<ul style="list-style-type: none"> • 1500 VDC Input to Output For optional high isolation version 3000 VDC, see note 3 • 1500 VDC Input to Case • 1500 VDC Output to Case
Isolation Capacitance	<ul style="list-style-type: none"> • 60 pF max
Switching Frequency	<ul style="list-style-type: none"> • 100-400 kHz variable
MTBF	<ul style="list-style-type: none"> • >2 MHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • -40 °C to +100 °C, derate from 100% load at +80 °C to no load at +100 °C
Case Temperature	<ul style="list-style-type: none"> • +100 °C max
Storage Temperature	<ul style="list-style-type: none"> • -40 °C to +125 °C
Humidity	<ul style="list-style-type: none"> • Up to 90%, non-condensing
Cooling	<ul style="list-style-type: none"> • Natural convection


Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current ⁽⁶⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
4.5-9 V	5.0 V	600 mA	40 mA	857 mA	2200 μ F	70%	JCB0305S05
	9.0 V	333 mA	40 mA	833 mA	470 μ F	72%	JCB0305S09
	12.0 V	250 mA	40 mA	810 mA	470 μ F	74%	JCB0305S12
	15.0 V	200 mA	40 mA	810 mA	470 μ F	74%	JCB0305S15
	24.0 V	125 mA	40 mA	857 mA	220 μ F	70%	JCB0305S24
	\pm 5.0 V	\pm 300 mA	40 mA	869 mA	\pm 1000 μ F	69%	JCB0305D05
	\pm 9.0 V	\pm 167 mA	40 mA	857 mA	\pm 220 μ F	70%	JCB0305D09
	\pm 12.0 V	\pm 125 mA	40 mA	833 mA	\pm 220 μ F	72%	JCB0305D12
	\pm 15.0 V	\pm 100 mA	40 mA	810 mA	\pm 220 μ F	74%	JCB0305D15
	\pm 24.0 V	\pm 63 mA	40 mA	857 mA	\pm 100 μ F	70%	JCB0305D24
9-18 V	5.0 V	600 mA	20 mA	328 mA	2200 μ F	76%	JCB0312S05
	9.0 V	333 mA	20 mA	324 mA	470 μ F	77%	JCB0312S09
	12.0 V	250 mA	20 mA	316 mA	470 μ F	79%	JCB0312S12
	15.0 V	200 mA	20 mA	316 mA	470 μ F	79%	JCB0312S15
	24.0 V	125 mA	20 mA	316 mA	220 μ F	79%	JCB0312S24
	\pm 5.0 V	\pm 300 mA	20 mA	324 mA	\pm 1000 μ F	77%	JCB0312D05
	\pm 9.0 V	\pm 167 mA	20 mA	320 mA	\pm 220 μ F	78%	JCB0312D09
	\pm 12.0 V	\pm 125 mA	20 mA	320 mA	\pm 220 μ F	78%	JCB0312D12
	\pm 15.0 V	\pm 100 mA	20 mA	320 mA	\pm 220 μ F	78%	JCB0312D15
	\pm 24.0 V	\pm 63 mA	20 mA	320 mA	\pm 100 μ F	78%	JCB0312D24
18-36 V	5.0 V	600 mA	12 mA	156 mA	2200 μ F	80%	JCB0324S05
	9.0 V	333 mA	12 mA	156 mA	470 μ F	80%	JCB0324S09
	12.0 V	250 mA	12 mA	152 mA	470 μ F	82%	JCB0324S12
	15.0 V	200 mA	12 mA	152 mA	470 μ F	82%	JCB0324S15
	24.0 V	125 mA	12 mA	156 mA	220 μ F	80%	JCB0324S24
	\pm 5.0 V	\pm 300 mA	12 mA	160 mA	\pm 1000 μ F	78%	JCB0324D05
	\pm 9.0 V	\pm 167 mA	12 mA	158 mA	\pm 220 μ F	79%	JCB0324D09
	\pm 12.0 V	\pm 125 mA	12 mA	156 mA	\pm 220 μ F	80%	JCB0324D12
	\pm 15.0 V	\pm 100 mA	12 mA	156 mA	\pm 220 μ F	80%	JCB0324D15
	\pm 24.0 V	\pm 63 mA	12 mA	156 mA	\pm 100 μ F	80%	JCB0324D24
36-72 V	5.0 V	600 mA	8 mA	81 mA	2200 μ F	77%	JCB0348S05
	9.0 V	333 mA	8 mA	80 mA	470 μ F	78%	JCB0348S09
	12.0 V	250 mA	8 mA	78 mA	470 μ F	80%	JCB0348S12
	15.0 V	200 mA	8 mA	78 mA	470 μ F	80%	JCB0348S15
	24.0 V	125 mA	8 mA	78 mA	220 μ F	80%	JCB0348S24
	\pm 5.0 V	\pm 300 mA	8 mA	80 mA	\pm 1000 μ F	78%	JCB0348D05
	\pm 9.0 V	\pm 167 mA	8 mA	79 mA	\pm 220 μ F	79%	JCB0348D09
	\pm 12.0 V	\pm 125 mA	8 mA	78 mA	\pm 220 μ F	80%	JCB0348D12
	\pm 15.0 V	\pm 100 mA	8 mA	78 mA	\pm 220 μ F	80%	JCB0348D15
	\pm 24.0 V	\pm 63 mA	8 mA	78 mA	\pm 100 μ F	80%	JCB0348D24

Notes

- Minimum load required to meet noise and ripple and initial set accuracy specifications. Below 25% load, noise and ripple increases to 200 mV pk-pk typical and load regulation to \pm 1% max.
- Cross regulation is \pm 5% when one output is at 100% the other is varied between 25% and 100%.
- For optional 3000 VDC isolation, add suffix '-H' to end of part number.
- For optional metal case version, add suffix '-M' to end of part number, eg. JCB0324S12-HM
- For alternative pin out, add suffix '-Z' to end of part number, eg. JCB0324S12-HMZ
- Input current measured at nominal input voltage

Mechanical Details

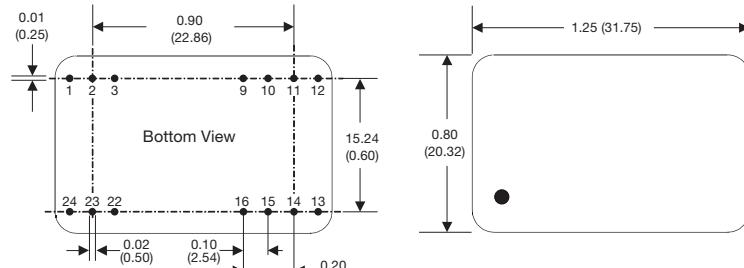

All dimensions are in inches (mm)

Weight: 0.04 lbs (20 g) approx.

Pin diameter: 0.5 \pm 0.05 (0.02 \pm 0.002)

Pin pitch tolerance: \pm 0.35 (\pm 0.014)

Case tolerance: \pm 0.5 (\pm 0.02)

PIN CONNECTIONS						
Pin	Single	Dual	Single-H	Dual-H	Single-Z, or -HZ	Dual-Z, or -HZ
1	+Vin	+Vin	N.P.	N.P.	N.P.	N.P.
2	N.C.	-Vout	-Vin	-Vin	-Vin	-Vin
3	N.C.	Common	-Vin	-Vin	-Vin	-Vin
9	N.P.	N.P.	N.C.	Common	N.P.	Common
10	-Vout	Common	N.P.	N.P.	N.P.	N.P.
11	+Vout	+Vout	N.C.	-Vout	N.C.	-Vout
12	-Vin	-Vin	N.P.	N.P.	N.P.	N.P.
13	-Vin	-Vin	N.P.	N.P.	N.P.	N.P.
14	+Vout	+Vout	+Vout	+Vout	+Vout	+Vout
15	-Vout	Common	N.P.	N.P.	N.P.	N.P.
16	N.P.	N.P.	-Vout	Common	-Vout	Common
22	N.C.	Common	+Vin	+Vin	+Vin	+Vout
23	N.C.	-Vout	+Vin	+Vin	+Vin	+Vout
24	+Vin	+Vin	N.P.	N.P.	N.P.	N.P.

N.C. - No Connection

N.P. - No Pin



T H E

X P E R T S

I N

P O W E R

06-May-09