


DETAIL "A"
CHAMFER
SCALE: 8:1

UNCONTROLLED DOCUMENT

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	67 Ω	168 Ω	380 Ω
Minimum	- Ω	134 Ω	- Ω

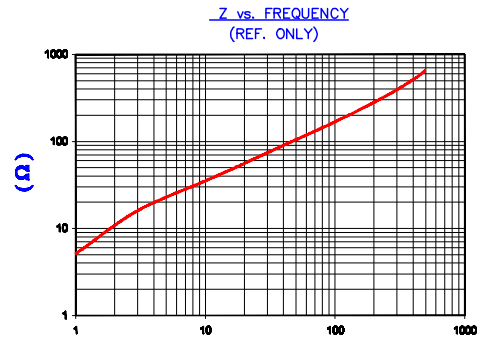

Z vs. FREQUENCY
(REF. ONLY)
AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture, REF # 2976

FERRITE CORE DIMENSIONS(SPEC): mm [IN]

A	37.00 [1.457]	+	0.80 [.031]
B	27.00 [1.063]	+	0.80 [.031]
C	18.25 [.7185]	+	1.00 [.039]
D	8.00 [.315]	+	0.50 [.020]
E	1.50 [.059]	+	0.40 [.016]
F	0.749 [.0295]	+	TYP.
G	4.00 [.1575]	+	TYP.

WEIGHT/1000 21.65 kgs [47.72 Lbs]

DIMENSIONS ARE IN MM [INCHES]			
G	UPDATE Z SPECS AND COMPANY LOGO	07/27/07	JRK
F	UPDATE MIN Z SPEC@100 Mhz, ADD REF #	01/29/04	JRK
E	UPDATE FORMAT CURVE AND Z SPECS	05/05/03	JRK
D	UPDATE TO CNZ FORMAT, ADD Z CURVE	07/29/02	JRK
C	CORRECT WEIGHT OF PART, UPDATE Z SPECS IMPEDANCE TESTED, UPDATE PRINT FORMAT	02/25/02	JRK
B	CORRECT DIMS. "A" & "B" & WEIGHT CORRECT IMPEDANCE, ADD DIMS. "F" & "G" CHANGED DETAIL "A" VIEW	09/21/99	JAJ
A	ORIGINAL DRAFT	09/13/99	JAJ
REV	DESCRIPTION	DATE	INT

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.



PROJECT/PART NUMBER: 28R1141-010	REV G	PART TYPE: CNZ RIBBON CORE	DRAWN BY: JAJ
DATE: 09/13/99	SCALE: 2 : 1	MATERIAL: NiZn Ferrite	
CAD # 28R1141-010-G	TOOL # R1141		

SCALE DRAWING 1:1



28R1141-010