


SHEET 1 OF 1

ECN #	APPRVD.	DATE	REV.
/			

Ground Terminal
8-32 Screw
(2 Places)

Phoenix VDFK6
(6 Places)

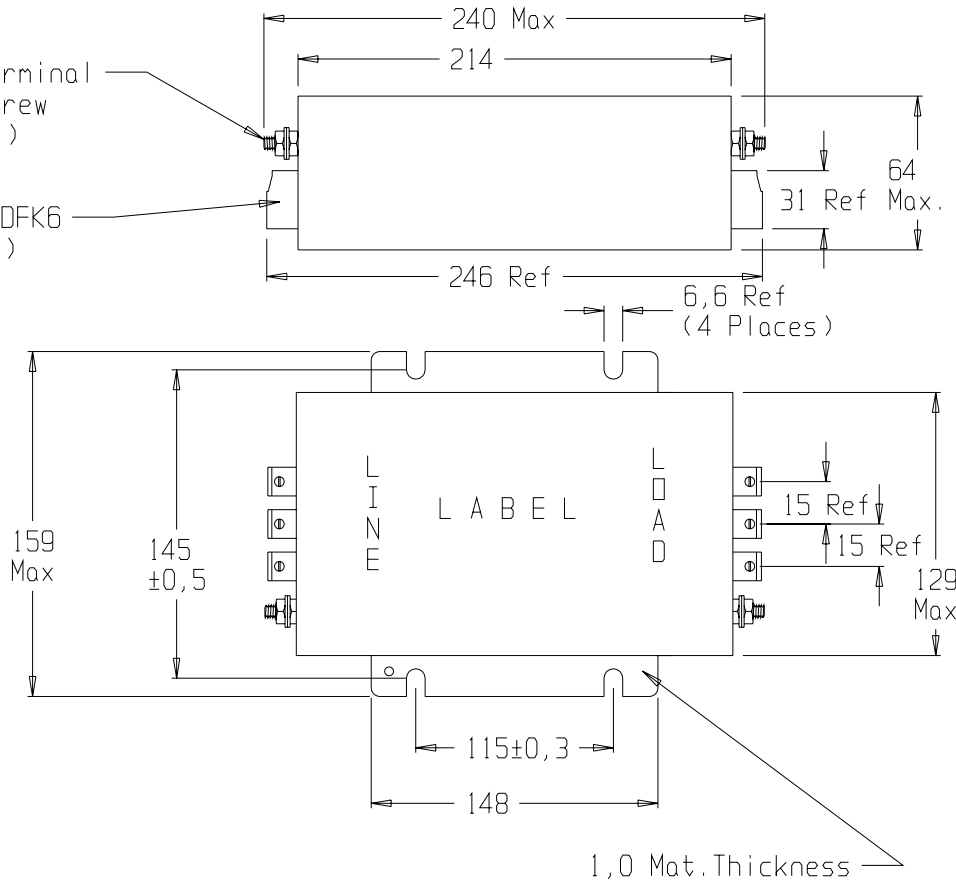

SPECIFICATION

50Amp /40°C 50-60Hz

440VAC Phase to Phase
250VAC Phase to Neutral/Gnd

ATTENUATION


Comm.Mode - 66dB μ V at 100kHz
Dif.Mode - 80dB μ V at 100kHz



RFI FILTER

CAD FILE: cde\prt\cd\F7754			
SCALE: .34	DATE: 2-17-96	DRG. NO.	REV.
DRW. BY: MS	DRIG: MS	50FCD10	00

Max. Leakage current at 10% unsymmetrical mains, each Line to Ground:
2,5mA at 120V 60Hz
4,3mA at 250V 50Hz



This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S order or prior written consent.

EQUIVALENT SCHEMATIC MEASURED AT 1kHz

