

| PART NO. | "A"<br>±.020 (±0.5) | "B" DIA.<br>±.020 (±0.5) | STUD THD.<br>"S" | INSERT THD.<br>"I" | FIG. NO. |
|----------|---------------------|--------------------------|------------------|--------------------|----------|
| QM1      | 7/16 (11.1)         | 7/16 (11.1)              | #6-32 X 1/4      | ----               | 1        |
| QM1T     |                     |                          |                  | #6-32 X 3/16       | 2        |
| QM2      |                     |                          | #6-32 X 1/2      | ----               | 1        |
| QM2T     |                     |                          |                  | #6-32 X 3/16       | 2        |
| QM3      | 1/2 (12.7)          | 9/16 (14.3)              | #8-32 X 3/8      | ----               | 1        |
| QM3T     |                     |                          |                  | #8-32 X 3/16       | 2        |
| QM4      |                     |                          | #8-32 X 3/8      | ----               | 1        |
| QM4T     |                     |                          |                  | #8-32 X 3/16       | 2        |
| QM5      | 3/4 (19.1)          | 1.0 (25.4)               | #1/4-20 X 1/2    | ----               | 1        |
| QM5T     |                     |                          |                  | #1/4-20 X 3/8      | 2        |
| QM6      |                     |                          | #5/16-18 X 9/16  | ----               | 1        |
| QM6T     |                     |                          |                  | #5/16-18 X 3/8     | 2        |
| QM7      | 9/16 (14.3)         | 1/2 (12.7)               | #10-32 X 3/8     | ----               | 1        |
| QM7T     |                     |                          |                  | #10-32 X 3/16      | 2        |

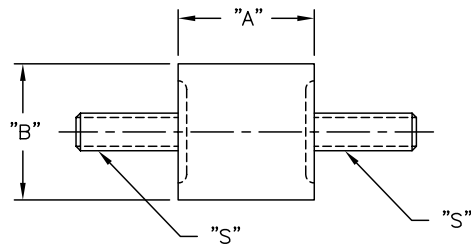


FIG. 1

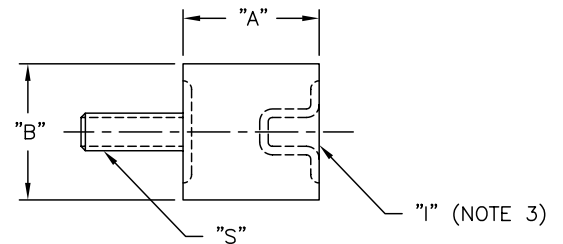


FIG. 2

NOTES:

1. MATERIAL: NATURAL RUBBER, 40 DUROMETER;  
THREADED METAL INSERTS,  
1010-1020 STEEL YELLOW CHROMATE OVER ZINC PLATE.
2. COLOR: BLACK.
3. THREADED METAL INSERT MAY BE BLIND CUP,  
OR THROUGH-NUT.

| TITLE: QUIET MOUNT SPACERS |                                     | DWG IN IN (MM) |   | FINAL                         |              | PRINT TYPE |           |
|----------------------------|-------------------------------------|----------------|---|-------------------------------|--------------|------------|-----------|
| C                          | UPDATED NOTES AND ADDED NOTE 3.     | SM 08.08.02    | TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1° | FILE # QM                     | DWN: P.B.    | APP:       | PART #    |
| B                          | CHANGED FILE NO. AND MODIFIED TABLE | SM 10.19.01    | MAT'L: SEE NOTES  | RE: RICHCO, INC.              | DT: 04-18-94 | DT:        | SEE TABLE |
| A                          | P/N QM-2 & QM-2T 1/2 WAS 1/4        | JB 04.24.96    | RE: RICHCO, INC.  | PO BOX 804238, CHICAGO, 60680 |              |            | CA        |
| REV                        | DESCRIPTION                         | ENGR DATE      |   |                               |              |            |           |