

High Performance Switched Capacitor Universal Filter

FEATURES

- All Filter Parameters *Guaranteed* over Temperature
- Wide Center Frequency Range (0.1Hz to 40kHz)
- Low Noise Wide Dynamic Range
- *Guaranteed* Operation for $\pm 2.37V$ and $\pm 5V$ Supply
- Low Power Consumption
- *Guaranteed* Clock to Center Frequency Accuracy of 0.3% (LTC1059A)
- *Guaranteed* Low Offset Voltages over Temperature
- Very Low Center Frequency and Q Tempco
- Clock Input T²L or CMOS Compatible
- Separate Highpass (or Notch or Allpass), Bandpass, Lowpass Outputs

APPLICATIONS

- Sinewave Oscillators
- Sweepable Bandpass/Notch Filters
- Full Audio Frequency Filters
- Tracking Filters

DESCRIPTION

The LTC1059 consists of a general purpose, high performance, active filter building block and an uncommitted op amp. The filter building block together with an external clock and 2 to 5 resistors can produce various second order functions which are available at its three output pins. Two out of three always provide lowpass and bandpass functions while the third output pin can produce notch or highpass or allpass. The center frequency of these functions can be tuned from 0.1Hz to 40kHz and it is dependent on an external clock or an external clock and a resistor ratio. The filter can handle input frequencies up to 100kHz. The uncommitted op amp can be used to obtain additional allpass and notch functions, for gain adjustment or for cascading techniques.

Higher than second order filter functions can be obtained by cascading the LTC1059 with the LTC1060 dual universal filter or LTC1061 triple universal filter. Any classical filter realization (such as Butterworth, Cauer, Bessel and Chebyshev) can be formed.

The LTC1059 can be operated with single or dual supplies ranging from $\pm 2.37V$ to $\pm 8V$ (or 4.74V to 16V single supply) and is pinout compatible with MF5.


The LTC1059 is manufactured by using Linear Technology's enhanced L²C²MOS™ silicon gate process.

L²C²MOS™ is a trademark of Linear Technology Corp.


7

TYPICAL APPLICATION

Wide Range 2nd Order Bandpass/Notch Filter with Q = 10

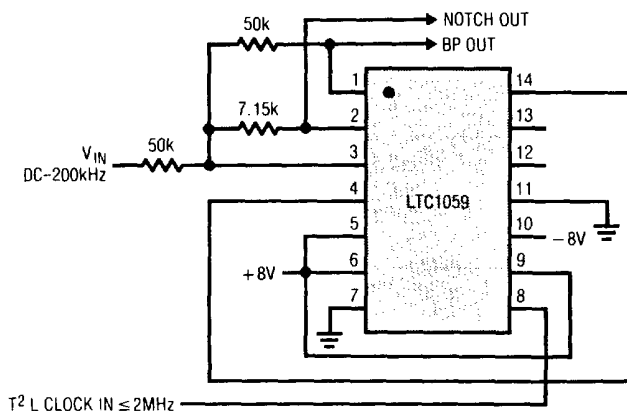


Center Frequency and Q Error

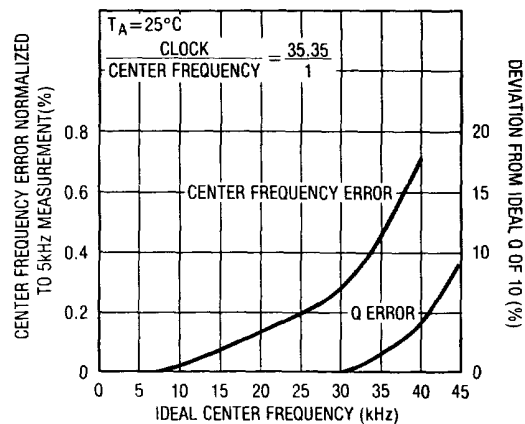

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 18V
 Power Dissipation 500mW
 Operating Temperature Range
 LTC1059AC, LTC1059C $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$
 LTC1059AM, LTC1059M $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$
 Storage Temperature Range -65°C to 150°C
 Lead Temperature (Soldering, 10sec) 300°C

PACKAGE/ORDER INFORMATION

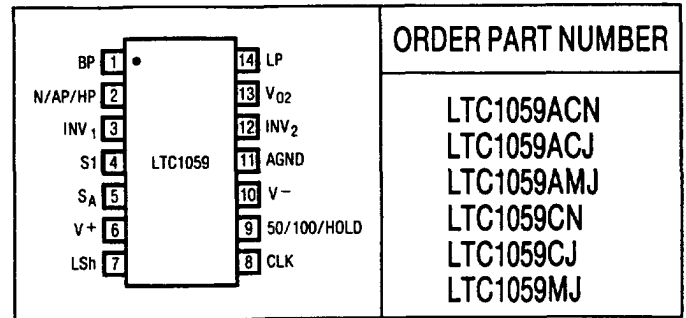

ELECTRICAL CHARACTERISTICS

(Complete Filter) $V_S = \pm 5V$, $T_A = 25^{\circ}\text{C}$, T^2L clock input level unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Center Frequency Range, f_o	$f_o \times Q \leq 400\text{kHz}$, Mode 1		0.1-40k		Hz
	$f_o \times Q \leq 1.6\text{MHz}$, Mode 1		0.1-18k		Hz
	$f_o \times Q \leq 250\text{kHz}$, Mode 3, $V_S = \pm 7.5V$		0.1-20k		Hz
	$f_o \times Q \leq 1\text{MHz}$, Mode 3, $V_S = \pm 7.5V$		0.1-16k		Hz
Input Frequency Range			0-200k		Hz
Clock to Center Frequency Ratio	LTC1059A Mode 1, 50:1, $f_{CLK} = 250\text{kHz}$, $Q = 10$	●		$50 \pm 0.3\%$	
	LTC1059 Mode 1, 50:1, $f_{CLK} = 250\text{kHz}$, $Q = 10$	●		$50 \pm 0.8\%$	
	LTC1059A Mode 1, 100:1, $f_{CLK} = 500\text{kHz}$, $Q = 10$	●		$100 \pm 0.3\%$	
	LTC1059 Mode 1, 100:1, $f_{CLK} = 500\text{kHz}$, $Q = 10$	●		$100 \pm 0.8\%$	
Q Accuracy	LTC1059A Mode 1, 50:1 or 100:1, $f_o = 5\text{kHz}$	●	± 0.5	3	%
	LTC1059 $Q = 10$	●	± 0.5	5	%
f_o Temperature Coefficient	Mode 1, $f_{CLK} < 500\text{kHz}$		5		ppm/ $^{\circ}\text{C}$
Q Temperature Coefficient	Mode 1, $f_{CLK} < 500\text{kHz}$, $Q = 10$		15		ppm/ $^{\circ}\text{C}$
DC Offset V_{OS1}	V_{OS2} $f_{CLK} = 250\text{kHz}$, 50:1, $S_{A/B}$ High	●	2	15	mV
	V_{OS2} $f_{CLK} = 500\text{kHz}$, 100:1, $S_{A/B}$ High	●	3	30	mV
	V_{OS2} $f_{CLK} = 500\text{kHz}$, 100:1, $S_{A/B}$ High	●	6	60	mV
	V_{OS2} $f_{CLK} = 250\text{kHz}$, 50:1, $S_{A/B}$ Low	●	2	20	mV
	V_{OS2} $f_{CLK} = 500\text{kHz}$, 100:1, $S_{A/B}$ Low	●	4	40	mV
	V_{OS3} $f_{CLK} = 250\text{kHz}$, 50:1	●	2	20	mV
	V_{OS3} $f_{CLK} = 500\text{kHz}$, 100:1	●	4	40	mV
	DC Low Pass Gain Accuracy	Mode 1, $R1 = R2 = 50\text{k}\Omega$	●	± 0.1	2
BP Gain Accuracy at f_o Mode 1, $Q = 10$, $f_o = 5\text{kHz}$			± 0.1		%
Clock Feedthrough $f_{CLK} \leq 1\text{MHz}$			10		mV
Max. Clock Frequency Mode 1, $Q < 5$, $V_S \geq \pm 5V$			2		MHz
Power Supply Current			3.5	5.5	mA
		●		7	mA

ELECTRICAL CHARACTERISTICS (Complete Filter) $V_S = \pm 2.37V$, $T_A = 25^\circ C$ unless otherwise specified

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Center Frequency Range	$f_o \times Q \leq 120kHz$, Mode 1, 50:1 $f_o \times Q \leq 120kHz$, Mode 3, 50:1		0.1-12k 0.1-10k		Hz Hz
Input Frequency Range			60k		Hz
Clock to Center Frequency Ratio LTC1059A LTC1059 LTC1059A LTC1059	Mode 1, 50:1, $f_{CLK} = 250kHz$, $Q = 10$ ● Mode 1, 50:1, $f_{CLK} = 250kHz$, $Q = 10$ Mode 1, 100:1, $f_{CLK} = 250kHz$, $Q = 10$ ● Mode 1, 100:1, $f_{CLK} = 250kHz$, $Q = 10$			50 ± 0.5%	
Q Accuracy LTC1059A LTC1059	Mode 1, $f_{CLK} = 250kHz$, $Q = 10$ 50:1 and 100:1		± 1 ± 2		% %
Max. Clock Frequency			700k		Hz
Power Supply Current			1.5	2.5	mA


ELECTRICAL CHARACTERISTICS (Internal Op Amps) $T_A = 25^\circ C$ unless otherwise specified

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage Range		± 2.375		± 8	V
Voltage Swings LTC1059A LTC1059 LTC1059, LTC1059A	$V_S = \pm 5V$, $R_L = 5k$ (Pins 1, 14) $R_L = 3.5k$ (Pins 2, 13) ●	± 4 ± 3.8 ± 3.6	± 4.2 ± 4.2		V V V
Input Offset Voltage Input Bias Current Output Short Circuit Current Source/Sink DC Open Loop Gain	$V_S = \pm 5V$ ●		1 3 40/3 80	15	mV pA mA dB
GBW Slew Rate	$V_S = \pm 5V$ $V_S = \pm 5V$		2 7		MHz V/μs

The ● denotes the specifications which apply over the full operating temperature range.


7

BLOCK DIAGRAM

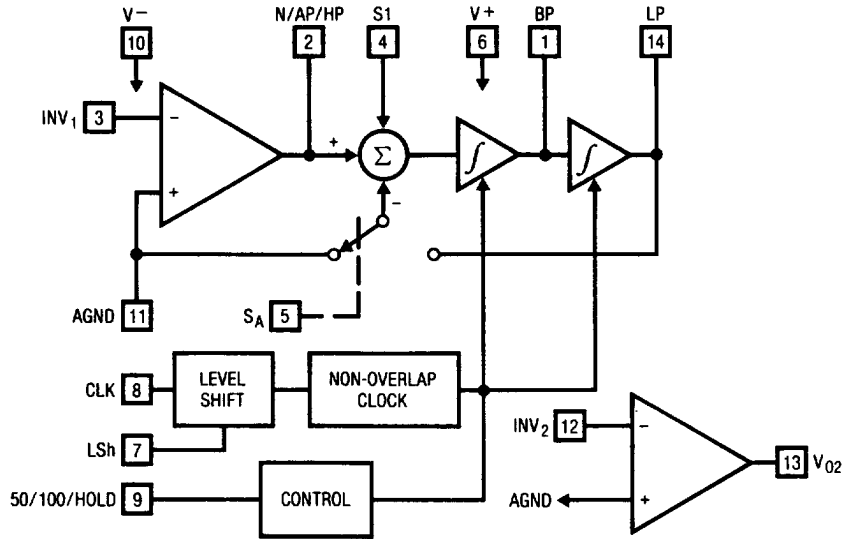


TYPICAL PERFORMANCE CHARACTERISTICS


Graph 1. Mode 1:
(f_{CLK}/f_o) Deviation vs Q

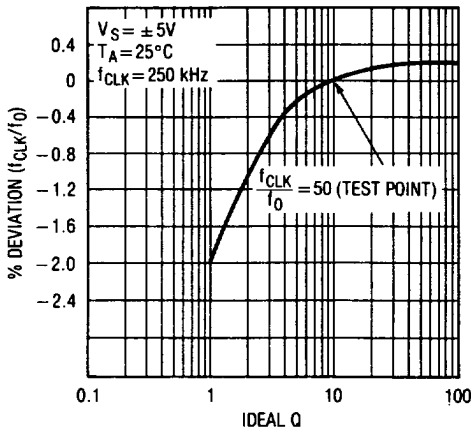

Graph 2. Mode 1:
(f_{CLK}/f_o) Deviation vs Q

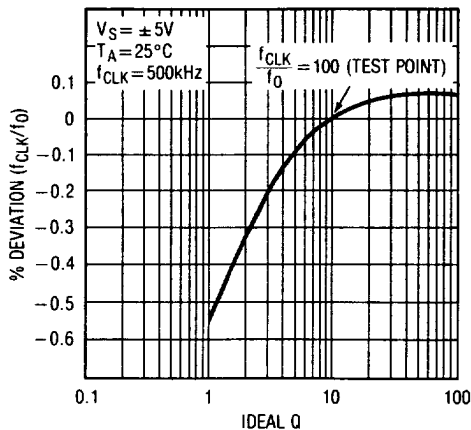


Graph 3. Mode 1: Q Error vs Clock Frequency

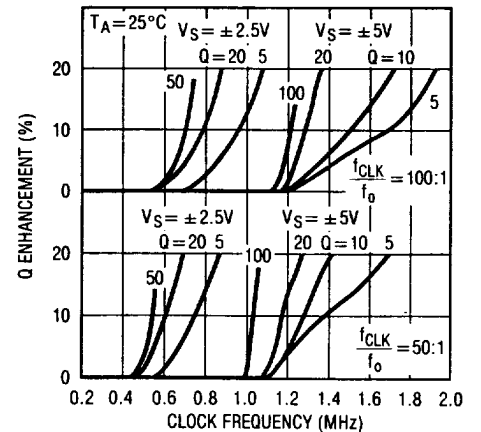


TYPICAL PERFORMANCE CHARACTERISTICS


Graph 4. Mode 1: Q Error vs Clock Frequency

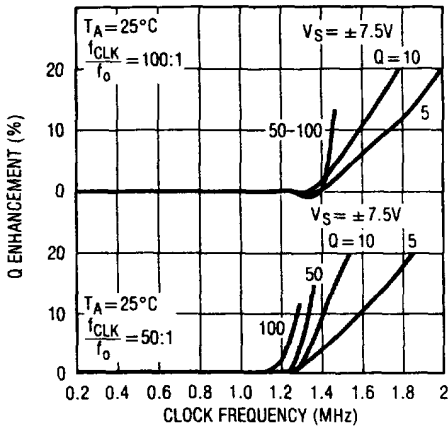


Graph 5. Mode 1: Measured Q vs fCLK and Temperature

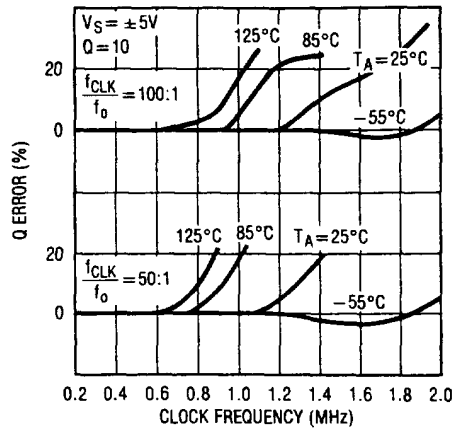


Graph 6. Mode 1: (fCLK/f0) vs fCLK and Q

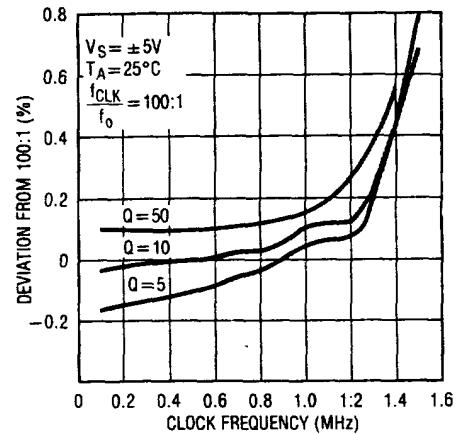


Graph 7. Mode 1: (fCLK/f0) vs fCLK and Q

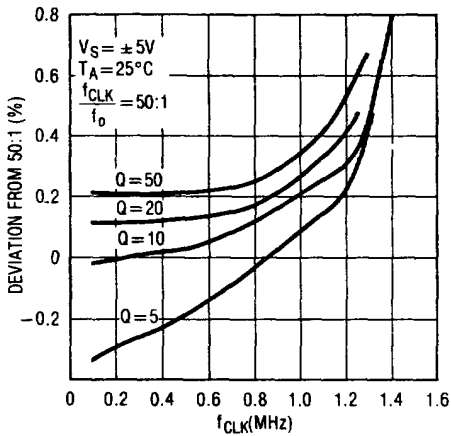


Graph 8. Mode 1: (fCLK/f0) vs fCLK and Temperature

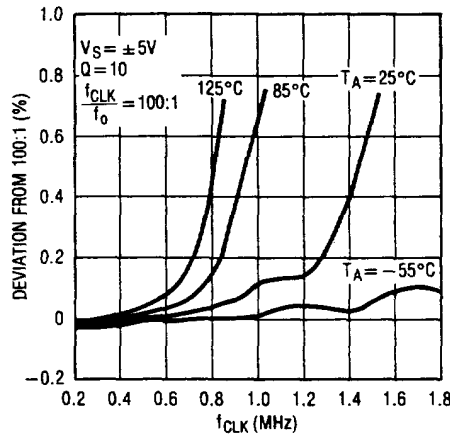


Graph 9. Mode 1: (fCLK/f0) vs fCLK and Temperature

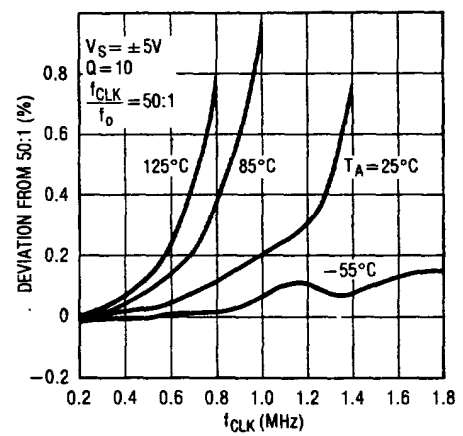


Graph 10. Mode 1: (fCLK/f0) vs fCLK and Q

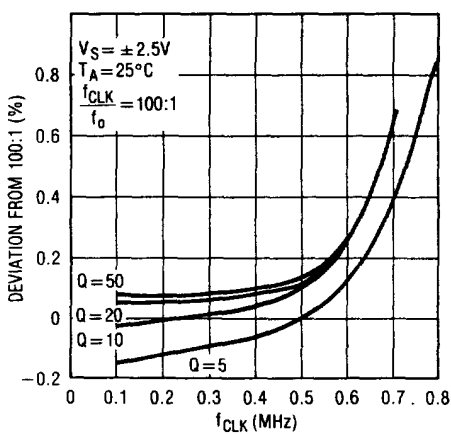

Graph 11. Mode 1: (fCLK/f0) vs fCLK and Q

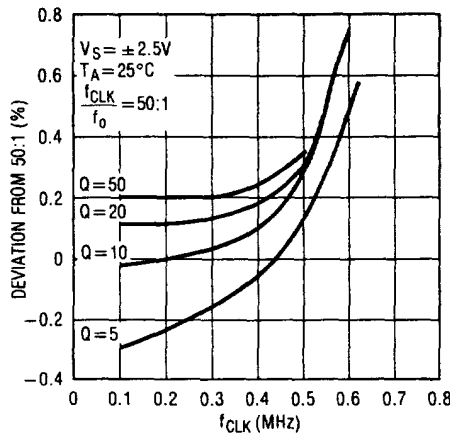


Graph 12. Mode 1: (fCLK/f0) vs fCLK and Temperature

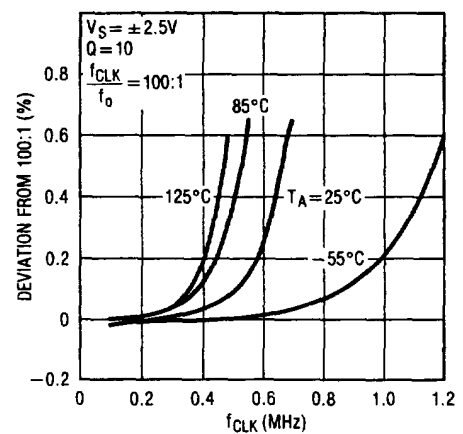


7

TYPICAL PERFORMANCE CHARACTERISTICS


Graph 13. Mode 1: (f_{CLK}/f_o) vs f_{CLK} and Temperature

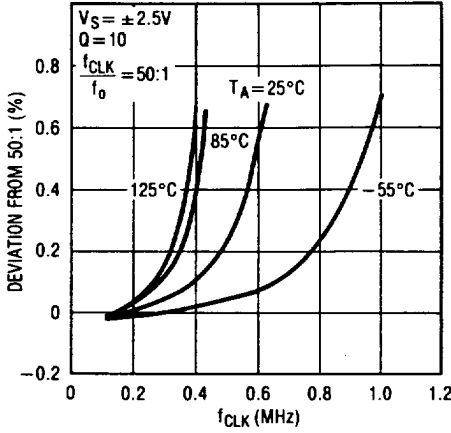


Graph 14. Mode 1: Notch Depth vs Clock Frequency

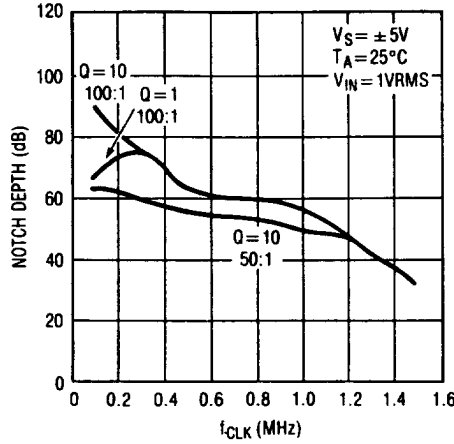


Graph 15. Mode 3: Deviation of (f_{CLK}/f_o) with Respect to Q = 10 Measurement

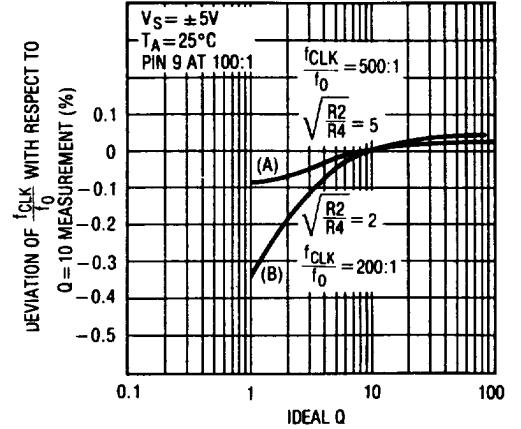


Graph 16. Mode 3: Q Error vs Clock Frequency

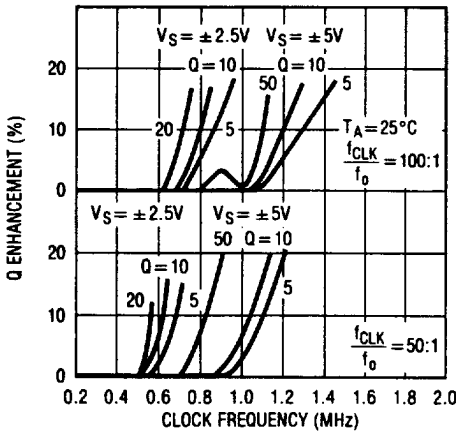


Graph 17. Mode 3 (R2 = R4): Q Error vs Clock Frequency

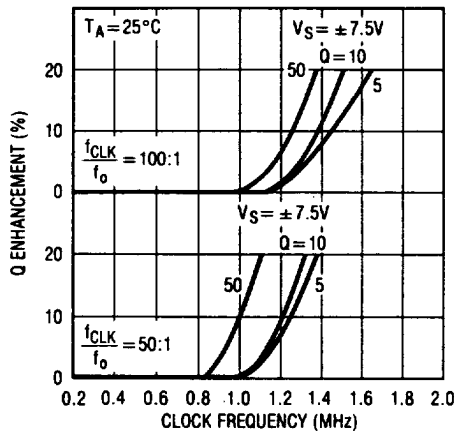


Graph 18. Mode 3 (R2 = R4): Measured Q vs f_{CLK} and Temperature

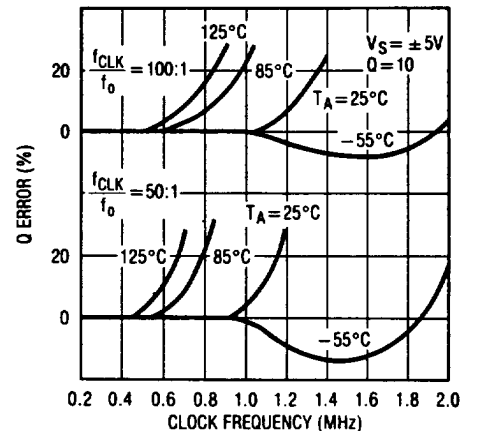


Graph 19. Mode 3 (R2 = R4): (f_{CLK}/f_o) vs f_{CLK} and Q

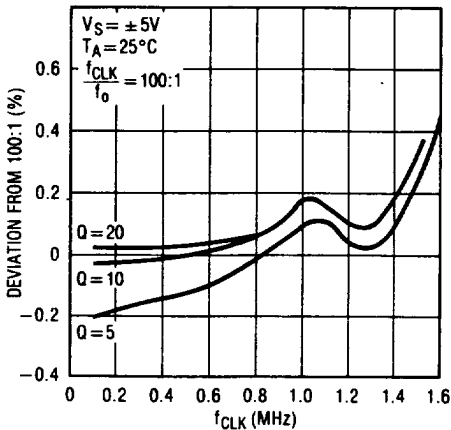

Graph 20. Mode 3 (R2 = R4): (f_{CLK}/f_o) vs f_{CLK} and Q

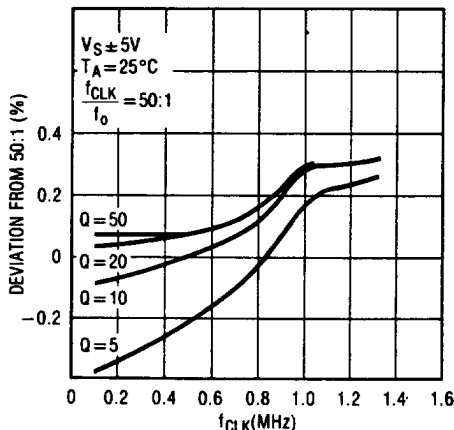


Graph 21. Mode 3 (R2 = R4): (f_{CLK}/f_o) vs f_{CLK} and Temperature

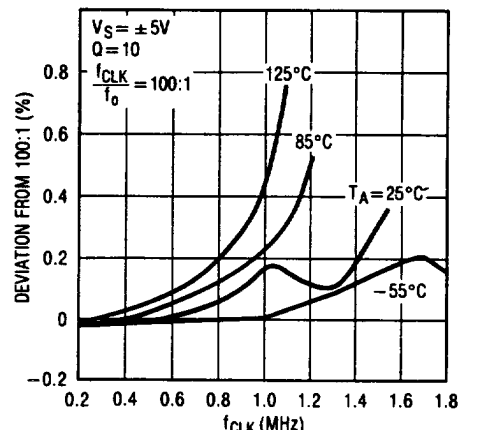


TYPICAL PERFORMANCE CHARACTERISTICS


Graph 22. Mode 3 (R2 = R4):
(f_{CLK}/f_o) vs f_{CLK} and Temperature

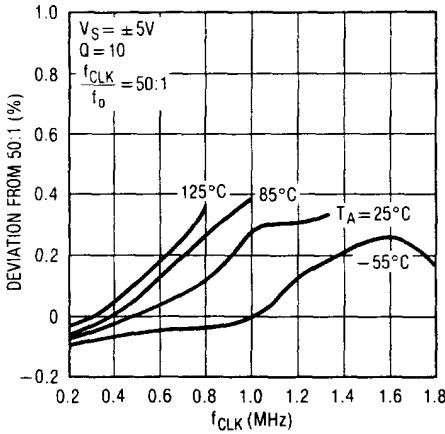


Graph 23. Mode 3 (R2 = R4):
(f_{CLK}/f_o) vs f_{CLK} and Temperature

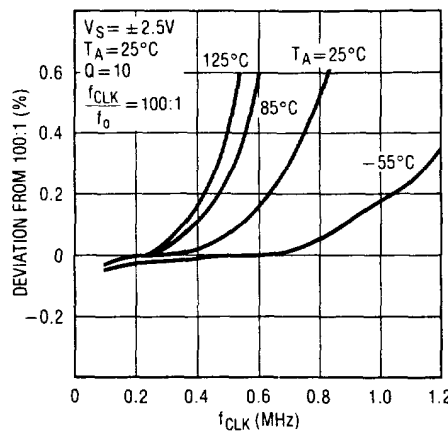


Graph 24. Mode 3 (R2 = R4):
(f_{CLK}/f_o) vs f_{CLK} and Temperature

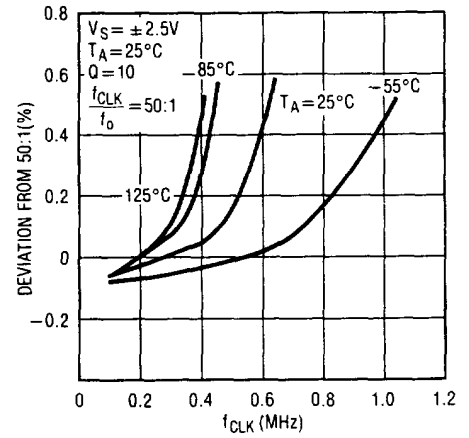

Graph 25. Mode 1c (R5 = 0),
Mode 2 (R2 = R4) Q Error vs Clock
Frequency

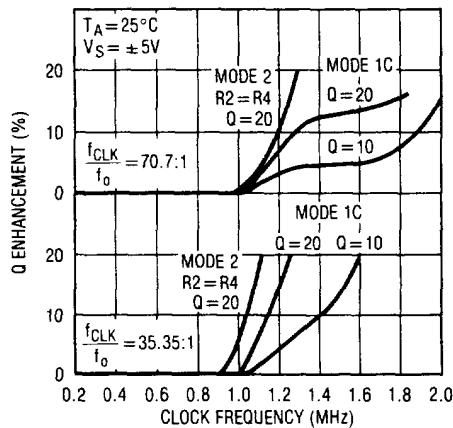

Graph 26. Supply Current vs
Supply Voltage

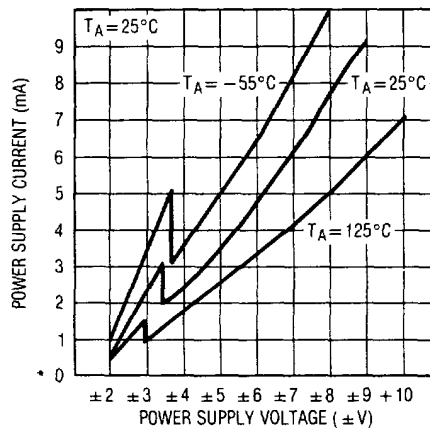


APPLICATIONS INFORMATION

The LTC1059 is compatible with the LTC1060. All the LTC1059 pins are functionally equivalent to the LTC1060 pins bearing the same title. For a detailed pin description and definition of various modes of operation refer to the LTC1060 data sheet. The LTC1059 is typically “faster” than the LTC1060 especially under single 5V (or ±2.5V)

supply operation. This becomes apparent through the typical performance characteristics of the part. All the graphs shown in this data sheet have been drawn under the same test conditions as in the LTC1060 data sheet; they are also numbered in the same order. For a complete discussion of the filter characteristics see the LTC1060 data sheet.

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.


**J Package
14-Lead Ceramic DIP**

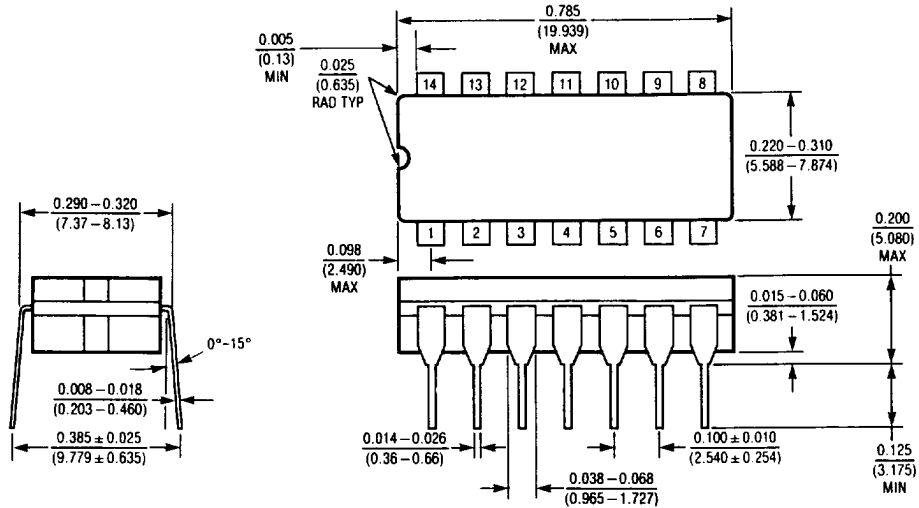

J14188

T_{jmax} 150°C	θ_{ja} 80°C/W
---------------------	-------------------------

**N Package
14-Lead Plastic DIP**

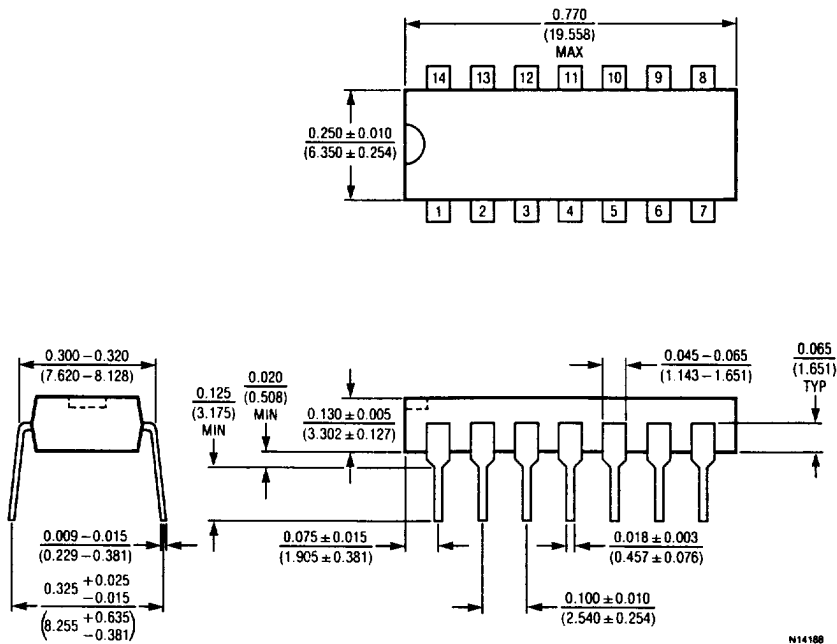

N14188

T_{jmax} 110°C	θ_{ja} 130°C/W
---------------------	--------------------------