


Compact Peltier-cooling type

■ FEATURES

- High optical power : 30 W/bar
- High stability
- Long life
- High cost performance
- Compact

■ APPLICATIONS

- Pumping source for solid state lasers
- Materials processing
- Welding
- Soldering
- Medical systems

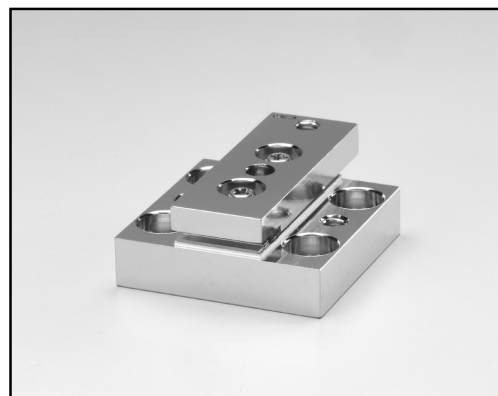

High power laser diode with a heatsink for Peltier cooler features several advantages such as high stability with long life and high cost performance with compact structure. Since they are designed small, they are easily applied as light source to pump solid state lasers, for material processing like welding or soldering, and for medical systems. The lasing areas consist of small laser emitters arranged in line and are thus called Bar structure. Water-cooling and Funryu-cooling (patent pending : Japan 8-139479, WO 00/11717) are also available. And focusing lens is available as an option.

■ ABSOLUTE MAXIMUM RATINGS (Each bar)

Parameter	Symbol	Value	Unit
Radiant Output Power / bar	Φ_e	33	W
Reverse Voltage	V_r	2	V
Operating Temperature	$T_{op(c)}$	+5 to +35	°C
Storage Temperature	T_{stg}	-20 to +40	°C

■ CHARACTERISTICS (Each bar, Top(c) = 25 °C)

Parameter	Symbol	Conditions	Value	Unit
Radiant Output Power / bar	Φ_e	$I_f = 38 \text{ A}$	30	W
Peak Emission Wavelength	λ_p	$\Phi_e = 30 \text{ W}$	808	nm
Spectral Radiation Half Bandwidth	$\Delta\lambda$	$\Phi_e = 30 \text{ W}$	3	nm
Forward Voltage	V_f	$\Phi_e = 30 \text{ W}$	1.8	V
Beam Spread Angle : Parallel	$\theta_{//}$	FWHM	7	° (degree)
: Vertical	θ_{\perp}		48	° (degree)
Lasing Threshold Current	I_{th}		12	A
Array Length	-		10	mm

*Contact sales staff for emitting wave-length and radiant output power (Φ_e) other than above.

HIGH POWER CW LASER DIODE with A Heatsink for PELTIER-COOLING L8413

Figure 1: Radiant Output Power vs. Forward Current (Typ.)

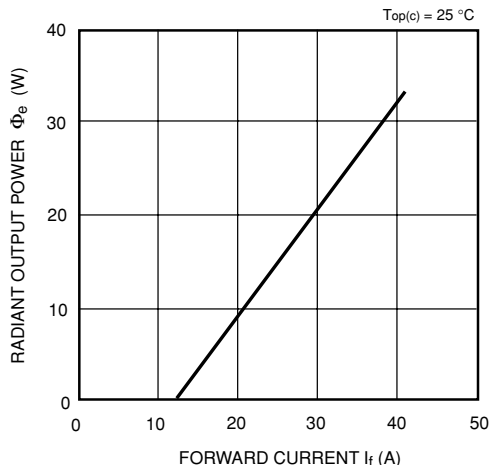


Figure 2: Typical Emission Spectrum


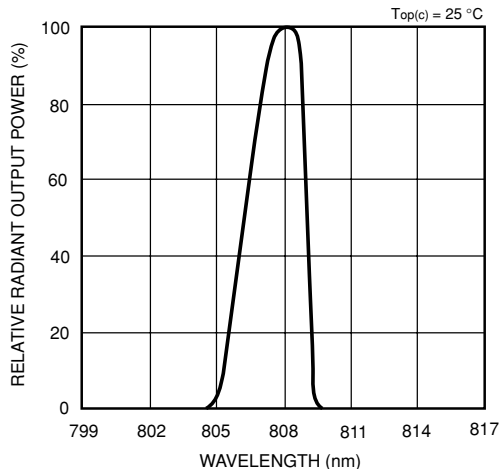


Figure 3: Dimensional Outline (Unit : mm)

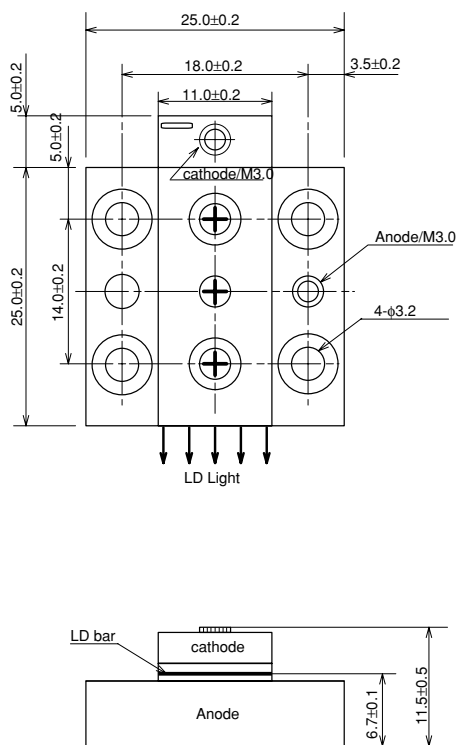

HAMAMATSU

<http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Laser Group, Sales Dept.

5000, Hirakuchi, Hamamatsu City, Shizuoka, 434-8601, Japan, Telephone: (81)53-584-0227, Fax: (81)53-584-0228, E-mail: laser-g@lsr.hpk.co.jp

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O. BOX 6910, Bridgewater, N.J. 08807-0910, U.S.A. Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33(1) 69 53 71 00, Fax: 33(1) 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Twin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesv gen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. LLD1007E03

AUG. 2006

Printed in Japan