

**2A CMOS LDO Regulator****AP2132****Description**

The AP2132 are positive Voltage regulator ICs fabricated by CMOS process. It consists of a voltage reference, an error amplifier, a power transistor, a resistor network for setting output voltage, a current limit circuit for current protection, and a chip enable circuit.

The AP2132 have features of large current, low dropout voltage, high output voltage accuracy, low input voltage. The AP2132 provides a Power Good (PG) signal to indicate if the voltage level of  $V_{OUT}$  reaches 92% of its rating value. And it operates with a  $V_{IN}$  as low as 1.4V and  $V_{PP}$  voltage 5V with output voltage programmable as low as 0.6V.

The AP2132 is available in 1.2V, 1.5V, 1.8V, 2.5V fixed output voltage versions and ADJ output voltage version. The fixed versions integrate the adjust resistors. It is also available in an adjustable version, which can set the output voltage with external resistor.

**Features**

- Adjustable Output Low to 0.6V
- Low Dropout Voltage: 300mV at  $I_{OUT}=2A$ ,  $V_{OUT}=1.2V$
- Over Current and Over Temperature Protection
- Enable Pin
- PSOP-8 package with Thermal Pad
- Maximum Output Current: 2A
- High Output Voltage Accuracy: 2%
- $V_{OUT}$  Power Good signal
- Excellent Line/Load Regulation

**Applications**

- Notebook

**Parametric Table**

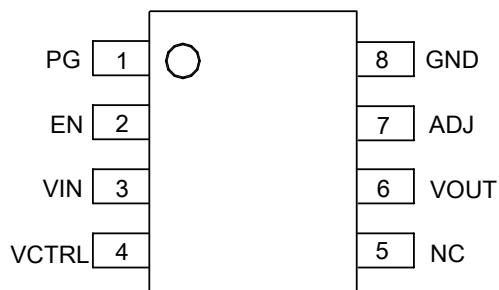
$I_{OUT}$ (Max) (mA)	2000 (Min.)
Supply Current ( $\mu A$ )	300
$V_{DROP}$ at $I_{OUT}=2A$ (Typ) (V)	0.3
Detect Voltage (Typ) (V)	1.2, 1.5, 1.8, 2.5 and ADJ
$V_{IN}$ (Max) (V)	5.5
PSRR (dB)	60
Load Regulation (Typ) (mV)	10
Line Regulation (Typ) (mV)	2
Operating Temperature (Min) ( $^{\circ}C$ )	-40
Operating Temperature (Max) ( $^{\circ}C$ )	85

**Benefits**

- Easy to Use
- Very Competitive Price

**Additional Available Materials**

- Samples
- Preliminary Datasheet
- Reliability Report
- ESD Report

**2A CMOS LDO Regulator**
**AP2132**
**Pin Configuration**
**PSOP-8**

**Ordering Information Example**

Package	Version Description	Part Number	Marking ID	Packing Type
PSOP-8	Each fixed output version integrates ADJ version	AP2132MP-1.2G1	2132MP-1.2G1	Tube
		AP2132MP-1.2TRG1	2132MP-1.2G1	Tape & Reel
		AP2132MP-1.5G1	2132MP-1.5G1	Tube
		AP2132MP-1.5TRG1	2132MP-1.5G1	Tape & Reel
		AP2132MP-1.8G1	2132MP-1.8G1	Tube
		AP2132MP-1.8TRG1	2132MP-1.8G1	Tape & Reel
		AP2132MP-2.5G1	2132MP-2.5G1	Tube
		AP2132MP-2.5TRG1	2132MP-2.5G1	Tape & Reel

Detailed information please refer to the relevant datasheet.

**Sales Office:**
**Shanghai**

 No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China  
 Tel : 86-21-24162266  
 Fax : 86-21-24162277

**USA**

 30920 Huntwood Ave. Hayward, CA 94544, USA  
 Tel : +1-510-324-2988  
 Fax : +1-510-324-2788

**Taiwan**

 4F, 298-1 Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
 Tel : 886-2-2656-2808  
 Fax : 886-2-2656-2806

**Shenzhen**

 Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen 518026, China  
 Tel : 86-755-8826 7951  
 Fax : 86-755-8826 7865