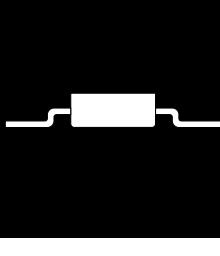


SURFACE MOUNT POSITIVE ADJUSTABLE 1.0 AMP VOLTAGE REGULATOR



**Isolated Hermetic Surface Mount Package
1.0 Amp, Positive Adjustable Voltage
Regulator**

FEATURES

- Hermetic Isolated Surface Mount Package
- Adjustable Output Voltage
- Eliminates Stocking Fixed Voltages
- Built-In Thermal Overload Protection
- Short Circuit Current Limiting
- Product Is Available Hi-Rel Screened
- Electrically Similar To Industry Standard P/N LM117

DESCRIPTION

This three terminal positive regulator is supplied in a hermetically sealed metal surface mount package. All protective features are designed into the circuit, including thermal shutdown, current limiting and safe-area control. With heat sinking, they can deliver over 1.0 amp of output current. This unit features output voltages that can be trimmed using external resistors, from 1.2 volts to 37 volts.

ABSOLUTE MAXIMUM RATINGS

Input to Output Voltage Differential.....	405 V
Operating Junction Temperature Range.....	- 55°C to + 150°C
Storage Temperature Range	- 55°C to + 150°C
Typical Power/Thermal Characteristics:	

Rated Power @ 25°C

T _C	17.5W
T _A	3W

Thermal Resistance:

θ _{JC}	3.5°C/W
θ _{JA}	42°C/W
Lead Temperature at Case (5 sec).....	225°C

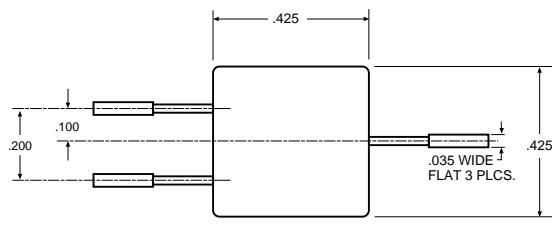
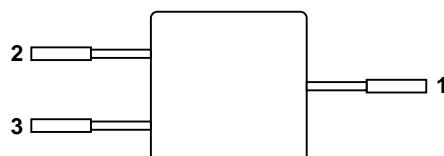
3.5

ELECTRICAL CHARACTERISTICS -55°C T_A 125°C, $I_L = 8\text{mA}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit	
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0\text{V}, T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$ $V_{DIFF} = 40\text{V}$	• 1.20 • 1.20 • 1.20	1.20 1.30 1.30	V	
Line Regulation (Note 1)	R_{LINE}	$3.0\text{V } V_{DIFF} 40\text{V}, V_{out} = V_{ref}, T_A = 25^\circ\text{C}$ $3.3\text{V } V_{DIFF} 40\text{V}, V_{out} = V_{ref}$	• -9 • -23	9 23	mV	
Load Regulation (Note 1)	R_{LOAD}	$V_{DIFF} = 3.0\text{V}, 10\text{mA } I_L 1.5\text{A}, T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}, 10\text{mA } I_L 1.5\text{A}$ $V_{DIFF} = 40\text{V}, 10\text{mA } I_L 300\text{mA}, T_A = 25^\circ\text{C}$ $V_{DIFF} = 40\text{V}, 10\text{mA } I_L 195\text{mA}$	• -15 • -15 • -15 • -15	15 15 15 15	mV	
Thermal Regulation	V_{RTH}	$V_{in} = 14.6\text{V}, I_L = 1.5\text{A}$ $P_d = 20 \text{ Watts, } t = 20 \text{ ms, } T_A = 25^\circ\text{C}$		-16 16	mV	
Ripple Rejection (Note 2)	R_N	$f = 120 \text{ Hz, } V_{out} = V_{ref}$ $C_{Adj} = 10 \mu\text{F, } I_{out} = 100 \text{ mA}$	• 66		dB	
Adjustment Pin Current	I_{Adj}	$V_{DIFF} = 3.0\text{V, } T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$ $V_{DIFF} = 40\text{V}$	• • •	100 100 100	μA	
Adjustment Pin Current Change	I_{Adj}	$V_{DIFF} = 3.0\text{V, } 10\text{mA } I_L 1.5\text{A, } T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V, } 10\text{mA } I_L 1.5\text{A}$ $V_{DIFF} = 40\text{V, } 10\text{mA } I_L 300\text{mA, } T_A = 25^\circ\text{C}$ $V_{DIFF} = 40\text{V, } 10\text{mA } I_L 195\text{mA}$ $3.0\text{V } V_{DIFF} 40\text{V, } T_A = 25^\circ\text{C}$ $3.3\text{V } V_{DIFF} 40\text{V}$	• • • • • •	-5 -5 -5 -5 -5 -5	μA	
Minimum Load Current	I_{Lmin}	$V_{DIFF} = 3.0\text{V, } V_{OUT} = 1.4\text{V (forced)}$ $V_{DIFF} = 3.3\text{V, } V_{OUT} = 1.4\text{V (forced)}$ $V_{DIFF} = 40\text{V, } V_{OUT} = 1.4\text{V (forced)}$	• • •	5.0 5.0 5.0	mA	
Current Limit (Note 2)	I_{CL}	$V_{DIFF} = 15\text{V}$ $V_{DIFF} = 40\text{V, } T_A = 25^\circ\text{C}$	•	1.5 0.18	3.5 1.5	A

Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

MECHANICAL OUTLINE**PIN CONNECTION**

Pin 1: V_{OUT}
 Pin 2: Adjust
 Pin 3: V_{IN}
 Case: Isolated

