

LOW LOSS SUPER HIGH SPEED RECTIFIER

■ Features

- Low VF
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching

■ Maximum ratings and characteristics

- Absolute maximum ratings


Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		600	V
Non-repetitive peak reverse voltage	V_{RSM}		600	V
Average output current	I_o	Square wave, duty=1/2, $T_c=100^\circ C$	20*	A
Surge current	I_{FSM}	Sine wave 10ms	80	A
Operating junction temperature	T_j		-40 to +150	$^\circ C$
Storage temperature	T_{stg}		-40 to +150	$^\circ C$

* Average forward current of centertap full wave connection


- Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=10A$	1.7	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	500	μA
Reverse recovery time	t_{rr}	$I_F=0.1A, I_R=0.2A, I_{rec}=0.05A$	50	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	1.2*	$^\circ C/W$

■ Outline drawings, mm

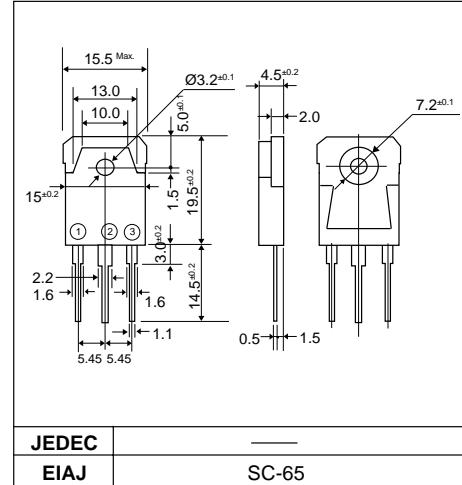

■ Connection diagram

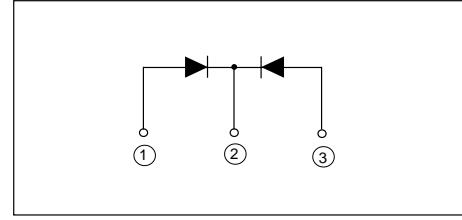

■ Characteristics

