



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SA1774-Q
2SA1774-R
2SA1774-S

Features

- Small Package
- Mounting: any position
- ROHS Compliant
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

**PNP Silicon
Epitaxial Transistor**

SOT-523

Maximum Ratings @ $T_a = 25^\circ\text{C}$ (unless otherwise noted)

Symbol	Parameter	Value	Unit
I_C	Collector Current	-0.15	A
P_D	Total Device Dissipation	0.15	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ\text{C}$

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C = -1\text{mA}$, $I_B = 0$)	-50		V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C = -50\mu\text{A}$, $I_E = 0$)	-60		V
$V_{(BR)EBO}$	Collector-Base Breakdown Voltage ($I_E = -50\mu\text{A}$, $I_C = 0$)	-7.0		V
I_{CBO}	Collector-Base Cutoff Current ($V_{CB} = -60\text{Vdc}$, $I_E = 0$)		-0.1	μA
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB} = -6.0\text{Vdc}$, $I_C = 0$)		-0.1	μA

ON CHARACTERISTICS

H_{FE}	DC Current Gain ($I_C = -1.0\text{mA}$, $V_{CE} = -6.0\text{Vdc}$)	120	560	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C = -5.0\text{mA}$, $I_B = -5.0\text{mA}$)		-0.5	Vdc
F_T	Transition Frequency ($V_{CE} = -12\text{Vdc}$, $I_C = -2\text{mA}$, $f = 30\text{MHz}$)	140 (Typ)		MHZ
C_{ob}	Collector Output Capacitance ($V_{CB} = -12\text{Vdc}$, $I_C = 0\text{mA}$, $f = 1\text{MHz}$)		5	PF

CLASSIFICATION OF h_{FE}

Rank	Q	R	S
Range	120-270	180-390	270-560
Marking	FQ	FR	FS

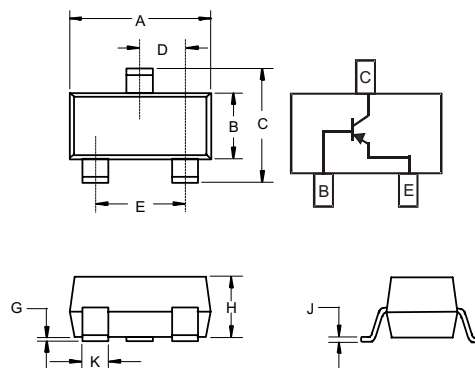

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.059	.067	1.50	1.70	
B	.030	.033	0.75	0.85	
C	.057	.069	1.45	1.75	
D	.020 Nominal		0.50 Nominal		
E	.035	.043	0.90	1.10	
G	.000	.004	.000	.100	
H	.028	.031	.70	0.80	
J	.004	.008	.100	.200	
K	.010	.014	.25	.35	



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp .reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp .does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* .and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com