


Capacitor, film, 0.068 uF, +/-2% Tol, DC General Purpose, 250V@125C

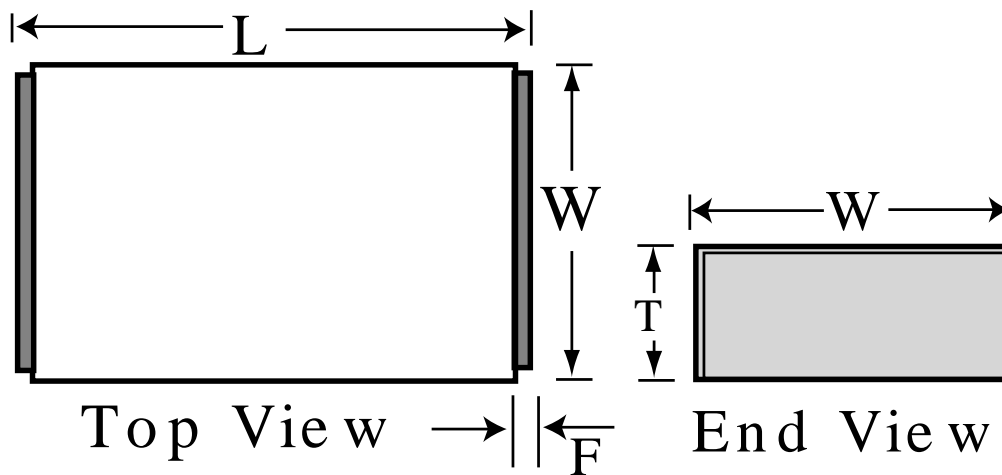

**Dimensions (mm)**

ID	Dimension	Tolerance
L	10.2	+/-0.2
W	9.1	+/-0.2
T	5.5	+/-0.2
F	0.5	nom

**Specifications**

<b>Manufacturer:</b>	KEMET
<b>Brand:</b>	Evox
<b>Capacitance:</b>	0.068 uF
<b>Rated Temperature:</b>	125C
<b>Voltage @ rated temp:</b>	250V
<b>Voltage AC:</b>	160VAC
<b>Tolerance:</b>	+/-2%
<b>Body Type:</b>	Surface Mount
<b>Chip Size:</b>	4036
<b>Construction:</b>	Non-inductive
<b>Application:</b>	DC General Purpose
<b>Sub Application:</b>	HighStability
<b>Temperature Range:</b>	-55/+125C
<b>Dielectric:</b>	Metallized Polyphenylene Sulphide
<b>Dissipation Factor @ 1 kHz:</b>	0.15%
<b>Dissipation Factor @ 10 kHz:</b>	0.25%
<b>Dissipation Factor @ 100kHz:</b>	0.5%
<b>Insulation Resistance:</b>	30 GOhm
<b>Maximum dVdT:</b>	10v/us
<b>Miscellaneous Electrical:</b>	IEC 60384-20 series (SMC)
<b>Package Kind:</b>	T&R
<b>Package Quantity:</b>	800