

Memory Module Specification

KVR667D2E5/2G 2GB 256M x 72-Bit DDR2-667 CL5 ECC 240-Pin DIMM

DESCRIPTION:

This document describes ValueRAM's 256M x 72-bit 2GB (2048MB) DDR2-667 CL5 SDRAM (Synchronous **DRAM**) ECC memory module. The components on this module include eighteen 128M x 8-bit DDR2-667 SDRAM in FBGA packages. This 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

FEATURES:

☑ Clock Cycle Time (tCK) CL=5 3ns (min.) / 8ns (max.)

Row Cycle Time (tRC) 54ns (min.)

Refresh to Active/Refresh Command Time (tRFC) 127.5ns

☑ Row Active Time (tRAS) 39ns (min.) / 70,000ns (max.)

Single Power Supply of +1.8V (+/- .1V)

✓ Power
 ✓ UL Rating
 2.187 W (operating)
 ✓ 94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

Iration will the module neight exceed 1.250" (31.75mm).

Units: Millimeters

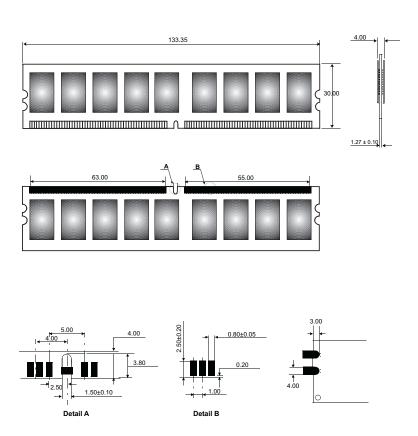


Figure 1: KVR667D2E5/2G 240-Pin DIMM