


# SD620CT Thru SD6100CT

**SCHOTTKY BARRIER RECTIFIER**  
**VOLTAGE - 20 to 100 Volts CURRENT - 6.0 Amperes**

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For thorough hole applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds at terminals

## TO-251AB

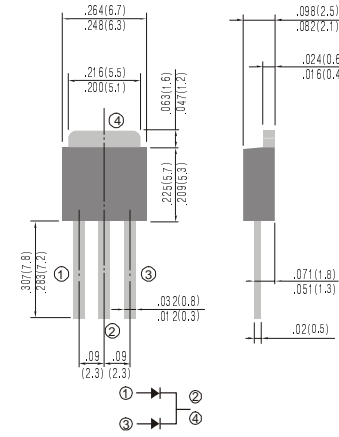

## MECHANICAL DATA

Case: TO-251AB molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Weight: 0.015 ounce, 0.4 gram.

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SD620CT	SD630CT	SD640CT	SD650CT	SD660CT	SD680CT	SD6100CT	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current at $T_C=75^\circ\text{C}$	$I_{AV}$	6.0	6.0	6.0	6.0	6.0	6.0	6.0	Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	75	75	75	75	75	75	75	Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	$V_F$	0.55	0.55	0.55	0.70	0.70	0.85	0.85	Volts
Maximum DC Reverse Current (Note 1) $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	$I_R$	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	0.2 20	mA
Maximum Thermal Resistance (Note 2)	$R_{\theta JC}$ $R_{\theta JA}$	6 80	6 80	6 80	6 80	6 80	6 80	6 80	$^\circ\text{C} / \text{W}$
Operating Junction Temperature Range	$T_J$	-55 to +125							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ\text{C}$

### NOTES:

1. Pulse Test with  $PW=300\mu\text{sec}$ , 2% Duty Cycle.
2. Mounted on P.C. Board with  $14\text{mm}^2$  (.013mm thick) copper pad areas.

## RATING AND CHARACTERISTIC CURVES

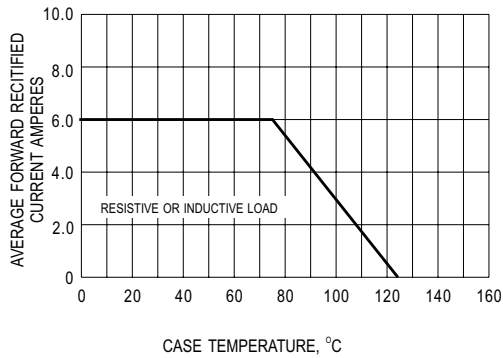


Fig.1- FORWARD CURRENT DERATING CURVE

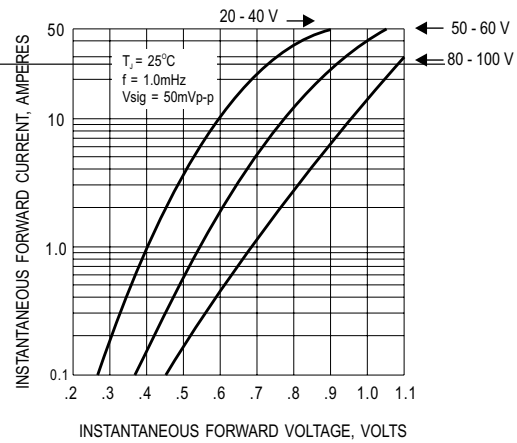


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

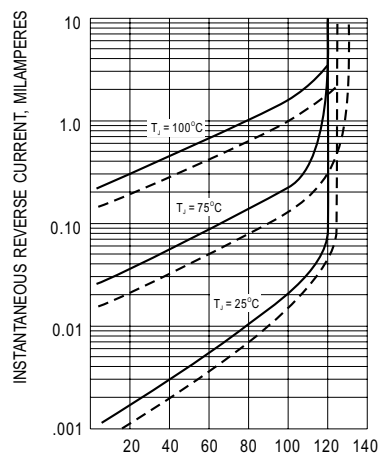


Fig.3- TYPICAL REVERSE CHARACTERISTIC

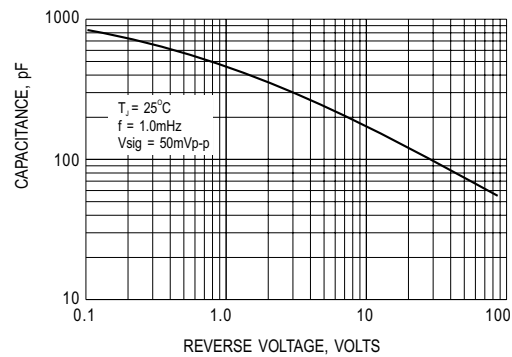


Fig.4- TYPICAL JUNCTION CAPACITANCE

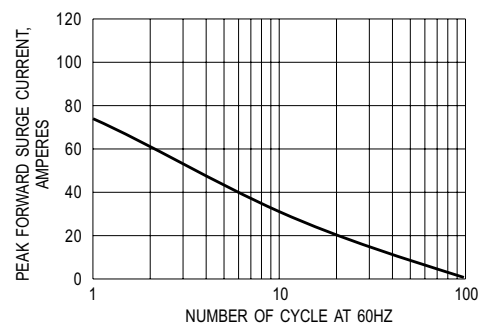


Fig.5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT