

# MB105 F thru MB110F

Miniature Glass Passivated Single-Phase Surface Mount Flat Bridge Rectifier

VOLTAGE - 50 TO 1000 VOLTS CURRENT - 1.0 AMPERES

## Major Ratings and Characteristics

$I_{F(AV)}$	1.0A
$V_{RRM}$	50-1000V
$I_{FSM}$	35 A
$I_R$	5.0 $\mu$ A
$V_F$	1.0V
$T_j$ max.	150 °C

## FEATURES

- Low profile space
- Ideal for automated placement
- Glass passivated chip junction
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:  
260°C/10 seconds at terminals
- Component in accordance to  
RoHS 2002/95/1 and WEEE 2002/96/EC

## MECHANICAL DATA


- Case: MBF Molded plastic over glass passivated chip
- Terminals: Solder plated, solderable per J-STD-002B and JESD22-B102D
- Polarity: Polarity symbols marked on body

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

	Symbol	MB105F	MB110F	MB120F	MB140F	MB160F	MB180F	MB110F	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward output rectified current at $T_A=30\text{ }^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load(JEDEC Method)	$I_{FSM}$	35							A
Maximum instantaneous forward voltage drop per leg at 1.0A	$V_F$	1.1							V
Maximum DC reverse current at $T_A = 25\text{ }^\circ\text{C}$ rated DC blocking voltage per leg $T_A = 125\text{ }^\circ\text{C}$	$I_R$	5.0 100							$\mu$ A
Typical junction capacitance per leg at 4.0 V ,1MHz	$C_J$	13							p F
Thermal resistance per leg (NOTE 1)	$R_{\theta JA}$	70							$^\circ\text{C/W}$
	$R_{\theta JL}$	20							
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

NOTE1: Units mounted on P.C.B. with 0.05×0.05" (1.3×1.3mm) pads

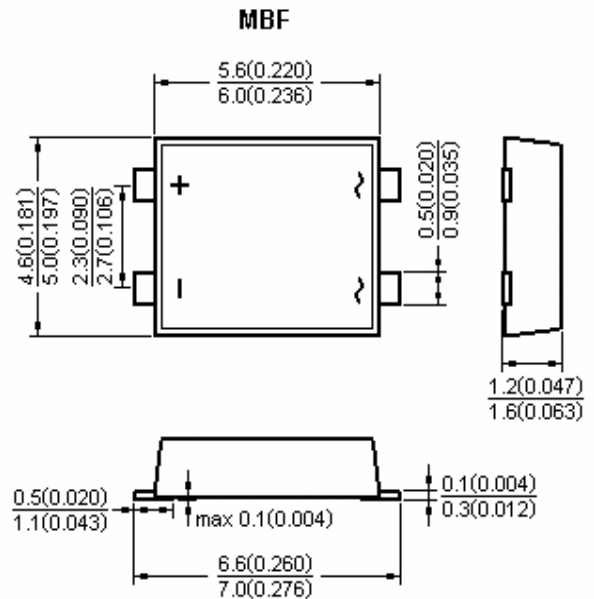

Dimensions in millimeters and (inches)


# MB105 F thru MB110F

Miniature Glass Passivated Single-Phase Surface Mount Flat Bridge Rectifier


VOLTAGE - 50 TO 1000 VOLTS CURRENT - 1.0 AMPERES

Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Derating Curve For Output Rectified Current**

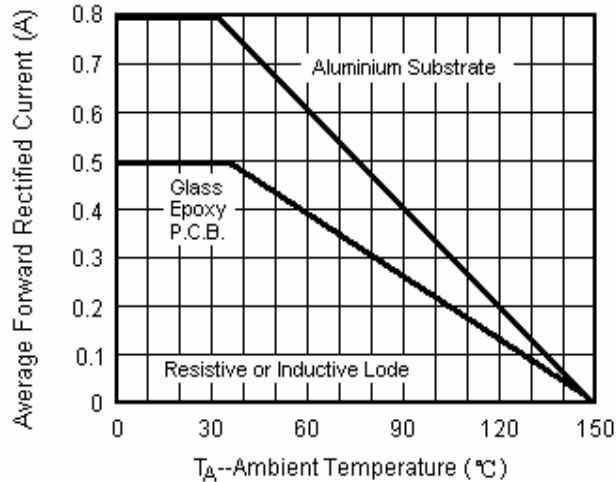


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

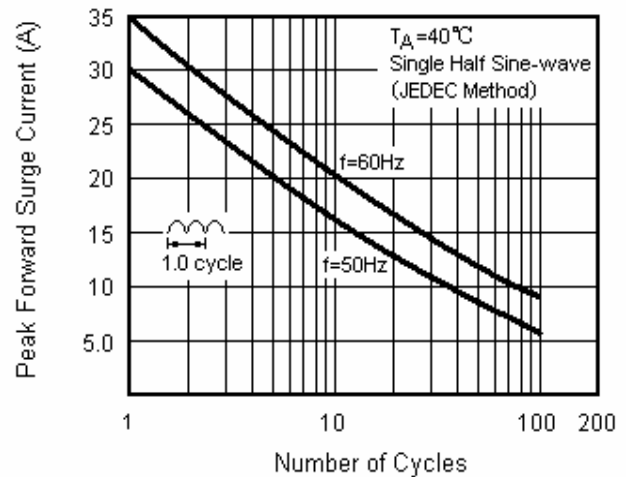

**Fig.3 Typical Forward Voltage Characteristics Per Leg**

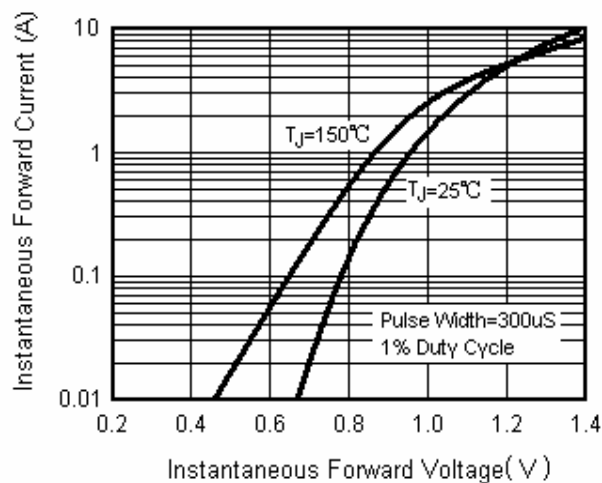

**Fig.4 Typical Reverse Leakage Characteristics Per Leg**

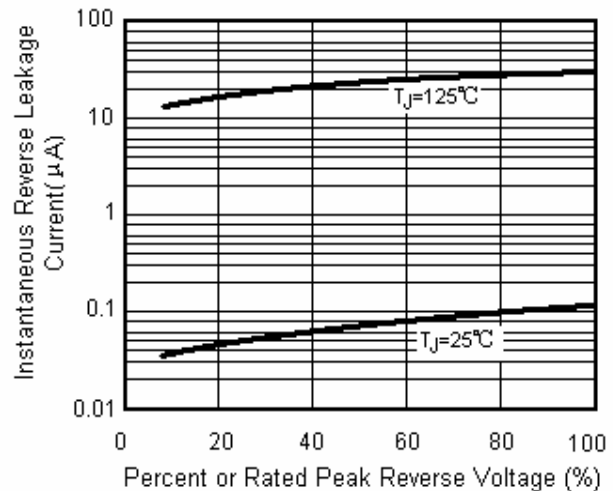

**Fig.5 Typical Junction Capacitance Per Leg**

