


RGL341A thru RGL341M

SURFACE MOUNT GLASS PASSIVATED FAST SWITCHING RECTIFIERS

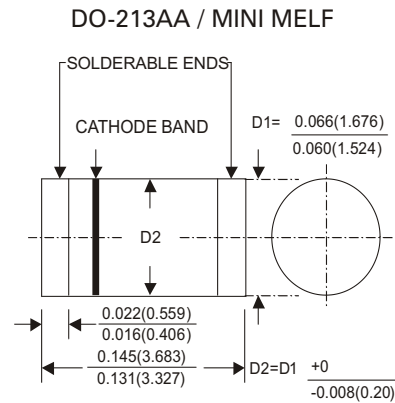

FEATURES

- Ideal for surface mounted applications
- Low leakage current
- Glass passivated chips
- Fast switching
- High temperature soldering guaranteed :
250°C/10 seconds/.375" , (9.5mm) lead lengths

MECHANICAL DATA

Case : Molded plastic use UL94V-0 recognized
flame retardant epoxy
Terminals : Plated terminals, solderable per
MIL-STD-202, Method208
Polarity : Red Color band on body denotes cathode
Mounting position : Any
Weight : 0.036gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temp. unless otherwise specified
Single phase, half sine wave, 60Hz, resistive or inductive load
For capacitive load, derate current by 20%

	SYMBOL	RGL 341A	RGL 341B	RGL 341D	RGL 341G	RGL 341J	RGL 341K	RGL 341M	UNITS
Maximum Current Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current $T_T=55^\circ\text{C}$	$I_{(AV)}$	1.0							Amps
Peak Forward Surge Current Single Sine-Wave on Rated Load (JEDEC Method)	I_{FSM}	10							Amps
Maximum Instantaneous Forward Voltage Drop at 1.0A DC	V_F	1.3							Volts
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=125^\circ\text{C}$	I_r	5.0 100							μA
Maximum Reverse Recovery Time, Time, Test Conditions : $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$	T_{RR}	150			250		500		nS
Typical Junction Capacitance	C_J	15							pF
Operating Junction and Storage Temperature Range	T_J T_{STG}	-55 to +150							$^\circ\text{C}$

RGL341A thru RGL341M

SURFACE MOUNT GLASS PASSIVATED FAST SWITCHING RECTIFIERS

RATING AND CHARACTERISTICS CURVES RGL341A THRU RGL341M

FIG. 1 – DERATING CURVE FOR OUTPUT RECTIFIER CURRENT

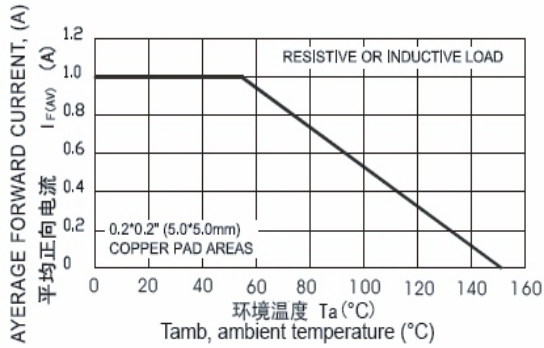


FIG. 2 – MAXIMUM NON – REPETITIVE PEAK FORWARD SURGE CURRENT

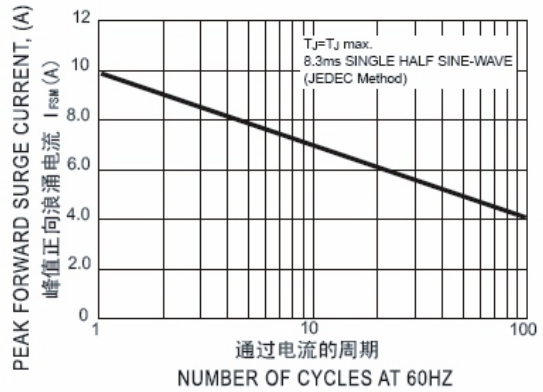


FIG. 3 – TYPICAL REVERSE CHARACTERISTICS

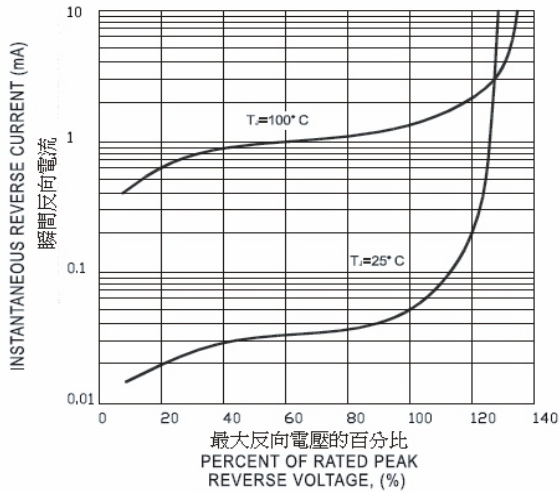


FIG. 4 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

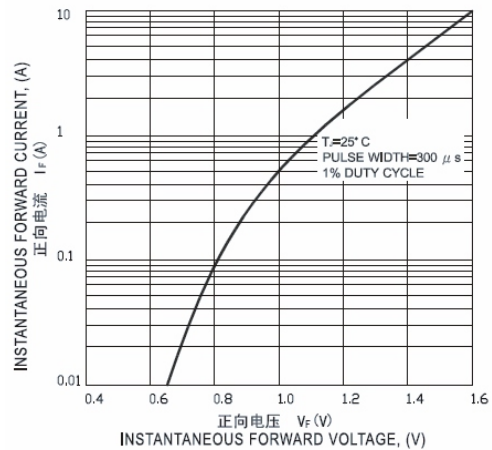


FIG. 5 – TYPICAL JUNCTION CAPACITANCE

