



ELECTRONICS INDUSTRY (USA) CO., LTD.

103 MOO 4, LATKRABANG EXPORT PROCESSING ZONE, LATKRABANG, BANGKOK 10520, THAILAND
 TEL. : (66 2) 326-0102, 739-4580 FAX. : (66 2) 326-0933 E-mail : eicfirst@iname.com http. :// www.eicsemi.com



Certificate Number: Q10561

Certificate Number: E17276

SKT2S - SKTBS

PRV : 20 - 100 Volts
Io : 2.5 Amperes

FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * High efficiency
- * Low power loss
- * Low cost
- * Low forward voltage drop

MECHANICAL DATA :

- * Case : SMA (DO-214AC) Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	SKT2S	SKT3S	SKT4S	SKT5S	SKT6S	SKT7S	SKT8S	SKT9S	SK TBS	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	70	80	90	100	Volts
Maximum Average Forward Current See Fig.1	$I_{F(AV)}$	2.5									Amps.
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	75									Amps.
Maximum Forward Voltage at $I_F = 2.5$ Amps. (Note 1)	V_F	0.5			0.74			0.79			Volt.
Maximum Reverse Current at Rated DC Blocking Voltage (Note 1)	I_R	0.5									mA
Junction Temperature Range	T_J	- 65 to + 125				- 65 to + 150					°C
Storage Temperature Range	T_{STG}	- 65 to + 150									°C

Notes :

(1) Pulse Test : Pulse Width = 300 μ s, Duty Cycle = 2%.

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

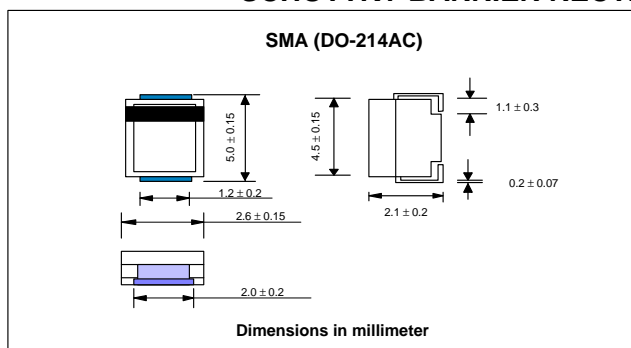

UPDATE : MAY 10, 1999



ELECTRONICS INDUSTRY (USA) CO., LTD.

103 MOO 4, LATKRABANG EXPORT PROCESSING ZONE, LATKRABANG, BANGKOK 10520, THAILAND
TEL. : (66 2) 326-0102, 739-4580 FAX. : (66 2) 326-0933 E-mail : eicfirst@iname.com http. : // www.eicsemi.com



Certificate Number: Q10561



Certificate Number: E17276

RATING AND CHARACTERISTIC CURVES (SKT2S - SKTBS)

FIG.1 - FORWARD CURRENT DERATING CURVE

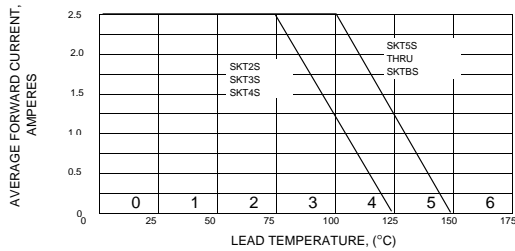


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

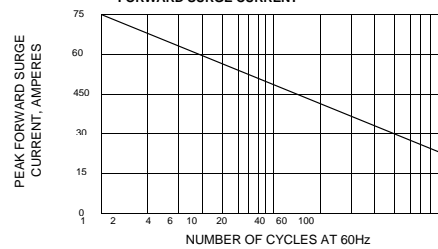


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

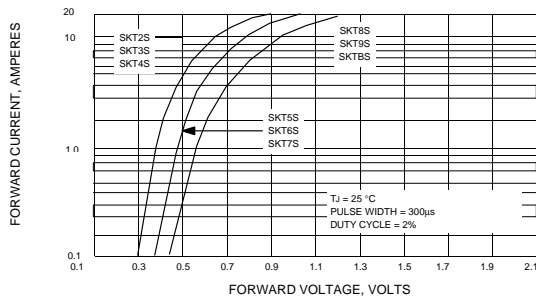


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

